


A  
B  
C  
D  
E  
F

A  
B  
C  
D  
E  
F

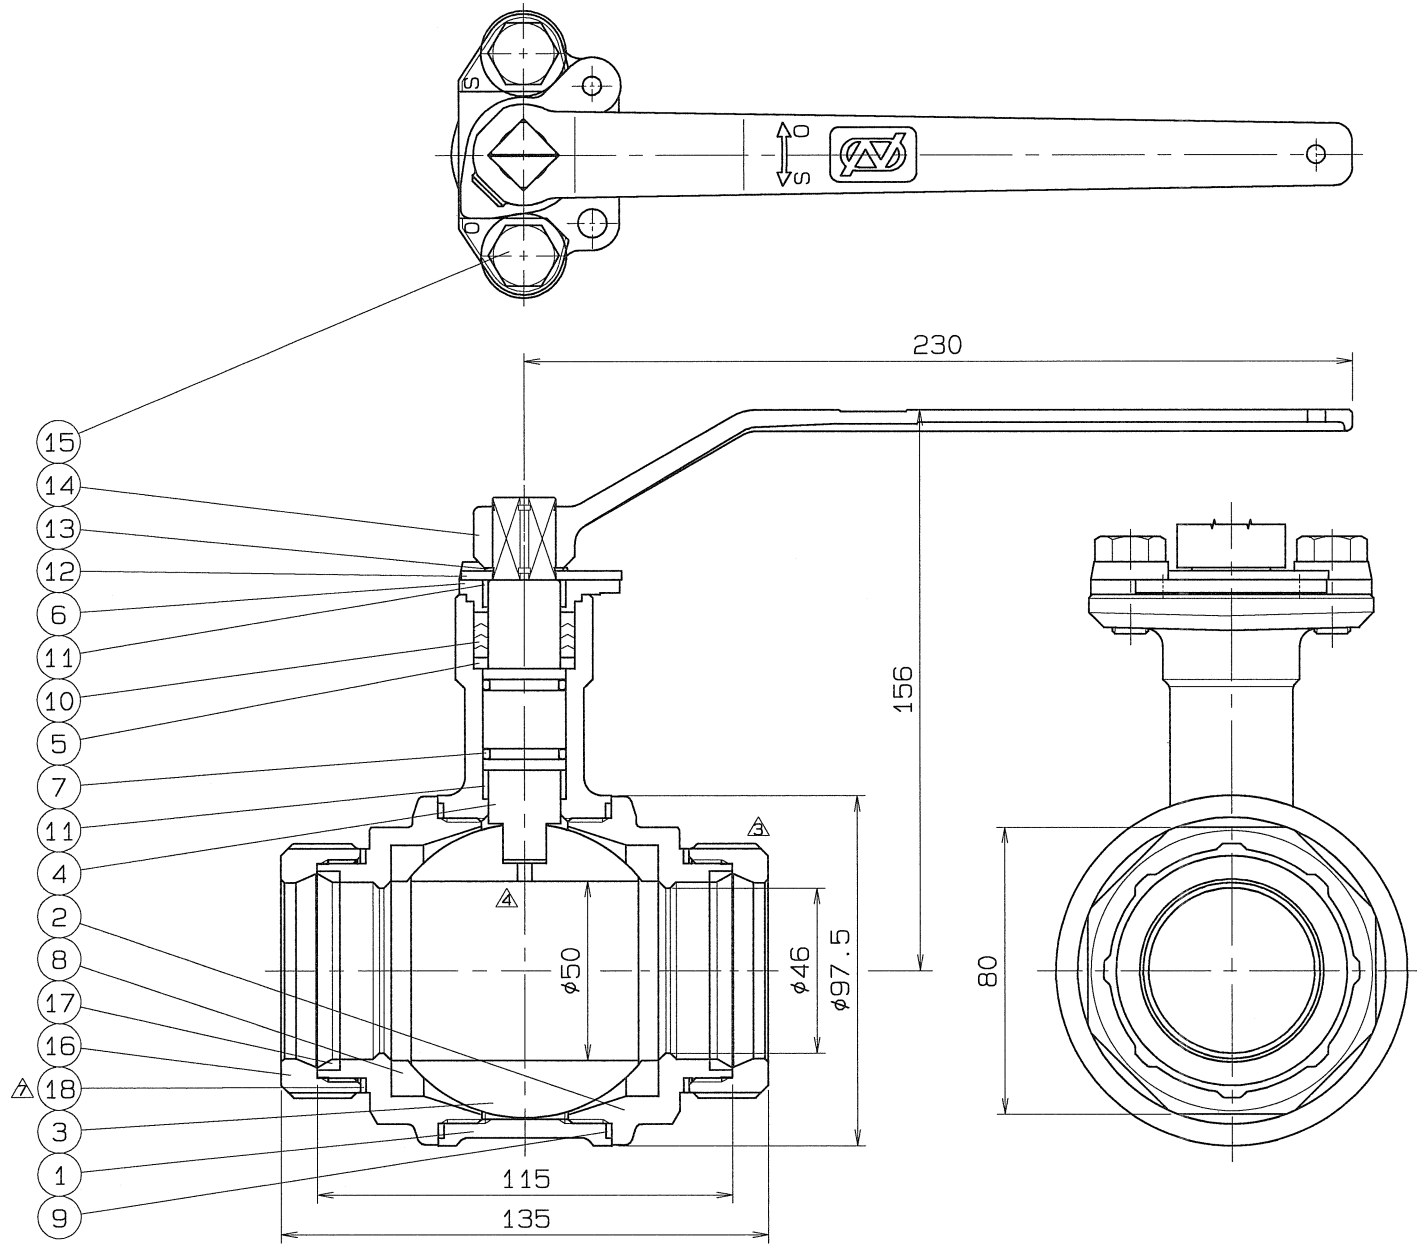

SPEC.		TEST PRESS.	
FLUID		SHELL	HYDRO 3.5MPa (35.7 kgf/cm <sup>2</sup> )
PRESS.	MAX 2.0MPa (20.4kgf/cm <sup>2</sup> )	SEAT	AIR 0.6MPa (6.1 kgf/cm <sup>2</sup> )
TEMP.	MAX 100℃	AIR	MPa ( kgf/cm <sup>2</sup> )

△\*SPECIAL TEFLON

No.	NAME OF PARTS	Q.TY	MATERIALS	REMARKS
18	CONICAL WASHER	2	JFE443CT	
17	RUBBER PACKING	2	SYNTHETIC RUBBER (HNBR)	
16	NUT	2	SCS 13	
15	GLAND BOLT	2	SUS 304	
14	HANDLE	1	SCS 13	
13	STOP RING	1	SUS 304	
12	STOPPER	1	SUS 304	
11	STEM BEARING	2	P.T.F.E.	GLASS FILLED
10	GLAND PACKING	1SET	P.T.F.E.	
9	GASKET PACKING	2	P.T.F.E.	
8	BALL SEAT	2	P.T.F.E.	*
7	O RING	2	VITON	P18
6	GLAND	1	SCS 13	
5	THRUST RING	1	SUS 329J1	
4	STEM	1	SUS 304	
3	BALL DISC	1	SCS 13A	
2	BODY CAP	2	SCS 13	
1	BODY	1	SCS 13	

NICE JOINT ENDS			
NAME	LONG NECK TYPE MINI BALL VALVE		
TYPE	NJ-220	SIZE	50Su
DATE	MAY. 26. 1997.	APPROVED BY	<i>M. Senoo</i>
SCALE	:	CHECKED BY	<i>Ch. Arai</i>
THIRD ANGLE PROJECTION METHOD	DRAWN BY <i>M. Sakai</i>		

△ 使用圧力、使用温度追加	H24. 1. 13.
△ 検査圧力の変更	H23. 2. 9.
△ 面ワッシャ材質変更	H21. 4. 6.