


SIZE	P	L	PIPE THREADS	A	B	H	CYLINDER SIZE	Q, TY
			d					
1/2	10	75	Rc 1/2	39	19	179	AT051UD	
3/4	15	85	Rc 3/4	43	23	183	AT051UD	

SPEC.		TEST PRESSURE	
FLUID	清水	SHELL	HYDRO 2.1 MPa (21.4kgf/cm ²)
PRESS.	0.98 MPa (10 kgf/cm ²) 以下	SEAT	AIR 0.6 MPa (6.1kgf/cm ²)
TEMP.	常温	AIR	MPa (kgf/cm ²)

注) 上記の流体条件と異なる場合
シリンダサイズが変更になる場合があります。


TORQUE CYLINDER

TYPE	ATUD		
ACTION	DOUBLE	OPERATION PROPERTY	ON-OFF
SUPPLY PRESSURE	0.39 MPa (4 kgf/cm ²)	HAND DEVICE	NOTHING

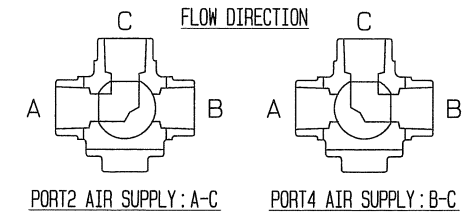

PIPE THREADS CONFORM WITH 'JIS B 0203'

21	CAP HEAD BOLT	1	SUS 304	
20	INDICATOR	1	SCS 13	
19	TORQUE CYLINDER	1		
18	HEXAGON BOLT	4	SUS 304	
17	COUPLING	1	SCS 13	
16	BRACKET	1	SCS 13	
15	HEXAGON NUT	4	SUS 304	
14	GLAND BOLT	2	SUS 304	
13	STEM BEARING	1	P.T.F.E.	GLASS FILLED
12	GLAND PACKING	1set	P.T.F.E.	
11	THRUST BEARING	1	P.T.F.E.	GLASS FILLED
10	GASKET PACKING	1	P.T.F.E.	
9	GASKET PACKING	2	P.T.F.E.	
8	BALL SEAT	4	P.T.F.E.	
7	GLAND	1	SCS 13	
6	GLAND SLEEVE	1	SUS 316	
5	STEM	1	SUS 316	
4	BALL DISC	1	SUS 316	
3	BLIND CAP	1	SCS 14	
2	BODY CAP	2	SCS 14	
1	BODY	1	SCS 14	
No.	NAME OF PARTS	Q.TY	MATERIALS	REMARKS
NAME	JIS 10K SCREWED ENDS TORQUE CYLINDER OPE. THREE WAY BALL VALVES			
TYPE	N-730L-HY2	SIZE	1/2, 3/4B	
DWG. No.	BAAS-5136	APPROVED BY	K. Yamato	
DATE	FEB. 18. 2011	CHECKED BY	G. H. H. H.	
SCALE		DESIGNED BY		
THIRD ANGLE PROJECTION METHOD		DRAWN BY	K. T. H. H.	

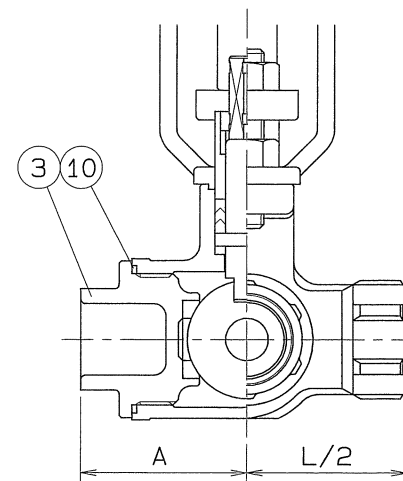

O. N. INDUSTRIES LTD.