


NJSR

SIZE	P	L <sub>1</sub>	L <sub>2</sub>	H	W	D	Q, TY
13 Su	15	83	75	87	60	38	
20 Su	20	95	85	94	80	46.5	

SPEC.		TEST PRESS.	
FLUID		SHELL HYDRO	3.5 MPa
PRESS. MAX	2.0 MPa	SEAT AIR	0.6 MPa
TEMP. MAX	100 ℃	AIR	MPa

"NJSR" 赤色スタンプ

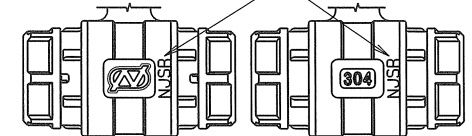

外観図

\*MODIFIED P.T.F.E.


17	O RING	1	FKM	
16	LOOSE STOPPER	2	SUS 304CSP	
15	RUBBER PACKIG	2	SYNTHETIC RUBBER (NJSR)	
14	RATCHET NUT	2	SCS 13	
13	HEXAGON NUT	1	SUS 304	
12	SPRING WASHER	1	SUS 304	
11	HANDLE	1	SUS 304	
10	GLAND PACKING	1	P.T.F.E.	
9	BEARING	1	P.T.F.E.	CARBON FILLED
8	GASKET PACKING	2	P.T.F.E.	
7	BALL SEAT	2	P.T.F.E.	*
6	WASHER	1	SUS 304CSP	
5	GLAND BUSHING	1	SCS 13	
4	STEM	1	SUS 304	
3	BALL DISC	1	SCS 13A	
2	BODY CAP	2	SCS 13	
1	BODY	1	SCS 13	

No.	NAME OF PARTS	Q.TY	MATERIALS	REMARKS
NAME NICE JOINT ENDS FULL BORE LONG NECK TYPE MINI BALL VALVES				
TYPE NJX-220		SIZE 13, 20Su		
DNG.No. XBAMS-0027◇		DATE NOV. 6, 2023		
APPROVED	DESIGNED	CHECKED	DRAWN	






THIRD ANGLE PROJECTION METHOD SCALE :

**O. N. INDUSTRIES LTD.**



A部詳細図

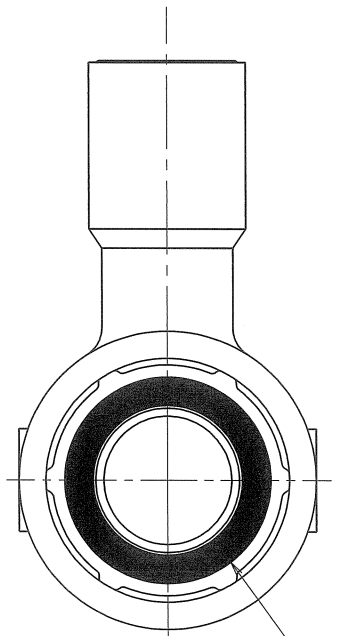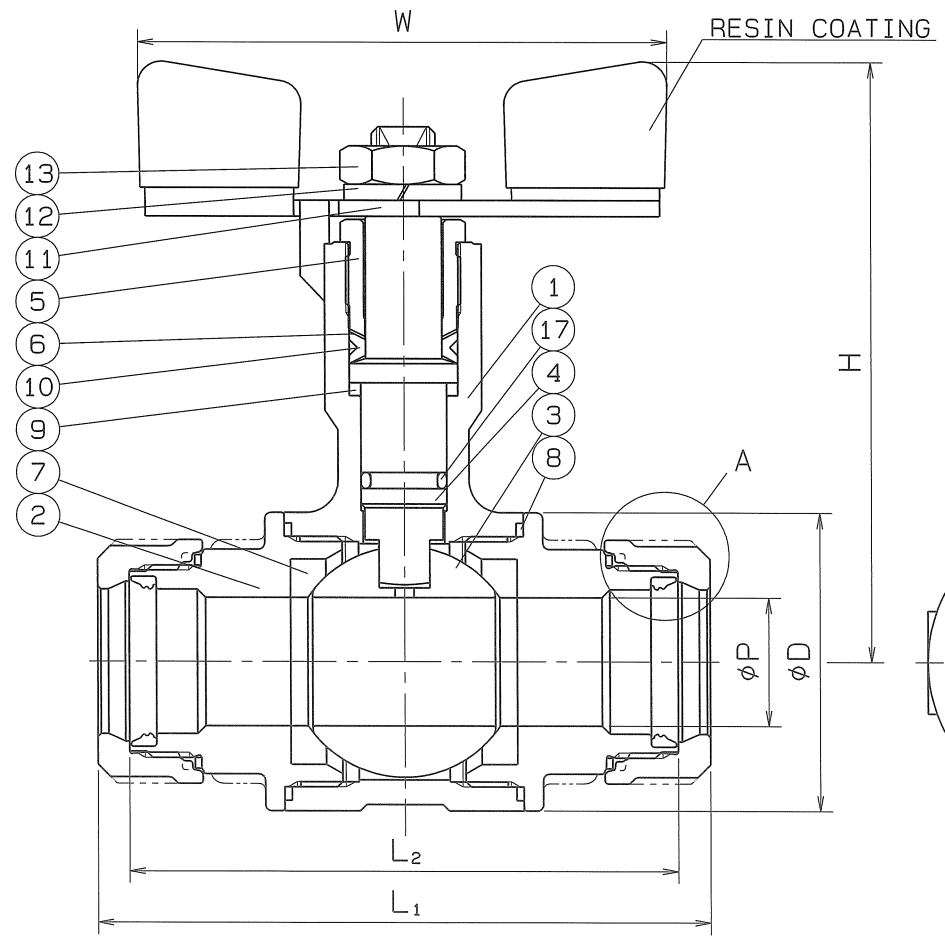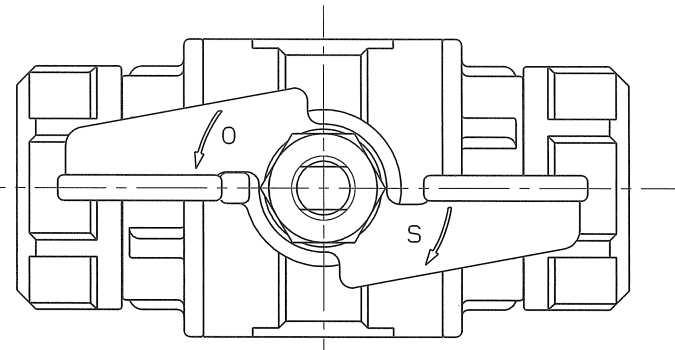

ナット端面赤色スタンプ  
※反対側のナットも同様

△		
△		
△		