


◇ 0E00-SWVBX 'ON' 9M0

NJSR

SIZE	PIPE THREADS		P	L	H	W	B	L <sub>1</sub>	D	Q, TY
	d									
13Sux1/2	Rc	1/2	10	69	46	60	30	35	33	
20Sux3/4	Rc	3/4	15	80	50	60	35	40	38	
25Sux1	Rc	1	20	88.5	58	80	40	42.5	47	
30Sux1	Rc	1	20	89.5	58	80	40	42.5	54	

SPEC.			TEST PRESS.		
FLUID			SHELL	HYDRO	3.5 MPa
PRESS.	MAX	MPa	SEAT	AIR	0.6 MPa
TEMP.	MAX	℃		AIR	MPa

"NJSR" 赤色スタンプ



外観図

PIPE THREADS CONFORM WITH "JIS B 0203"  
\*MODIFIED P.T.F.E.

15	LOOSE STOPPER	1	SUS 304CSP	
14	RUBBER PACKING	1	SYNTHETIC RUBBER (NJSR)	
13	RATCHET NUT	1	SCS 13	
12	HEXAGON NUT	1	SUS 304	
11	SPRING WASHER	1	SUS 304	
10	HANDLE	1	SUS 304	
9	THRUST BEARING	1	P.T.F.E.	CARBON FILLED
8	THRUST PACKING	1	P.T.F.E.	CARBON FILLED
7	GASKET PACKING	1	P.T.F.E.	
6	BALL SEAT	2	P.T.F.E.	*
5	GLAND	1	SUS 316	
4	STEM	1	SUS 316	
3	BALL DISC	1	SCS 13A	13Su-SUS 304
2	BODY CAP	1	SCS 13	
1	BODY	1	SCS 13	
No.	NAME OF PARTS	Q.TY	MATERIALS	REMARKS

NAME NICE JOINT AND SCREWED ENDS  
BALL VALVES


TYPE NJX-610 SIZE 13~30Su

DWG.No. XBAMS-0030◇ DATE NOV. 6.2023.



THIRD ANGLE PROJECTION METHOD SCALE :

APPROVED	CHECKED	DESIGNED	DRAWN
小島	小島	山島	馬場

O. N. INDUSTRIES LTD.



A部詳細図

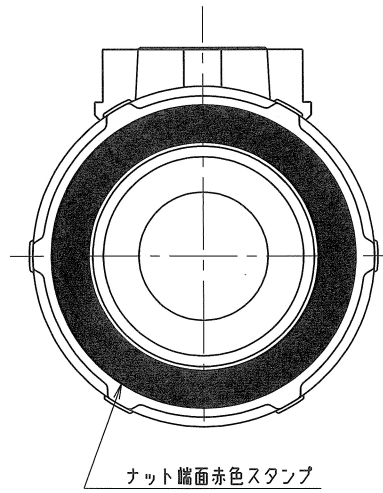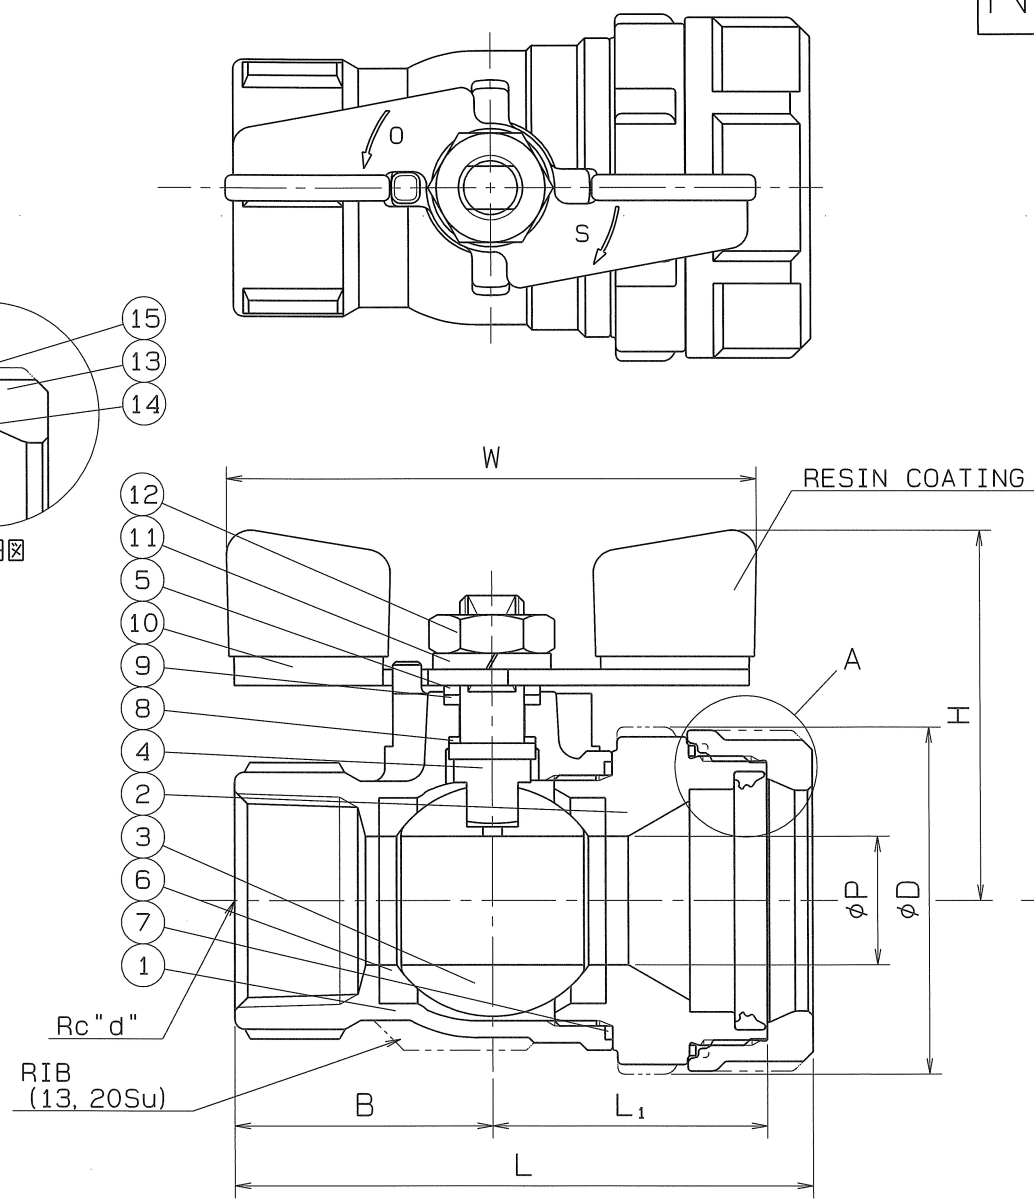

ナット端面赤色スタンプ