


◇ EE00-SWVBX ON 9MO

Q.TY:

NJSR

| SPEC. | | | TEST PRESS. | |
|--------|-----|-----|-------------|---------------|
| FLUID | | | SHELL | HYDRO 3.5 MPa |
| PRESS. | MAX | MPa | SEAT | AIR 0.6 MPa |
| TEMP. | MAX | ℃ | AIR | MPa |

"NJSR" 赤色スタンプ




外観図



PIPE THREADS CONFORM WITH "JIS B 0203"
*MODIFIED P.T.F.E.

| | | | | |
|----|----------------|---|-------------------------|---------------|
| 15 | LOOSE STOPPER | 1 | SUS 304CSP | |
| 14 | RUBBER PACKING | 1 | SYNTHETIC RUBBER (NJSR) | |
| 13 | RATCHET NUT | 1 | SCS 13 | |
| 12 | HEXAGON NUT | 1 | SUS 304 | |
| 11 | SPRING WASHER | 1 | SUS 304 | |
| 10 | HANDLE | 1 | SUS 304 | |
| 9 | THRUST BEARING | 1 | P.T.F.E. | CARBON FILLED |
| 8 | THRUST PACKING | 1 | P.T.F.E. | CARBON FILLED |
| 7 | GASKET PACKING | 1 | P.T.F.E. | |
| 6 | BALL SEAT | 2 | P.T.F.E. | * |
| 5 | GLAND | 1 | SUS 316 | |
| 4 | STEM | 1 | SUS 316 | |
| 3 | BALL DISC | 1 | SCS 13A | |
| 2 | BODY CAP | 1 | SCS 13 | |
| 1 | BODY | 1 | SCS 13 | |



| No. | NAME OF PARTS | Q.TY | MATERIALS | REMARKS |
|--|---------------|----------|--------------|---------|
| NAME NICE JOINT AND SCREWED ENDS BALL VALVES | | | | |
| TYPE | NJX-611 | SIZE | 20Sx3/4B | |
| DWG.No. | XBAMS-0033◇ | DATE | NOV. 6.2023. | |
| THIRD ANGLE PROJECTION METHOD | | SCALE | | |
| APPROVED | CHECKED | DESIGNED | DRAWN | |



O. N. INDUSTRIES LTD.

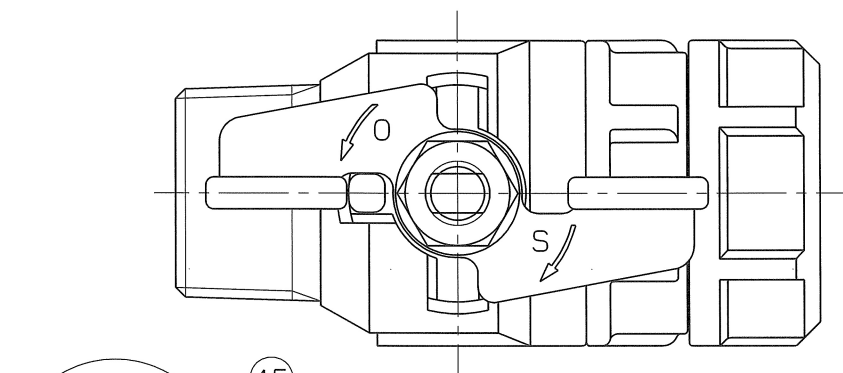

A部詳細図

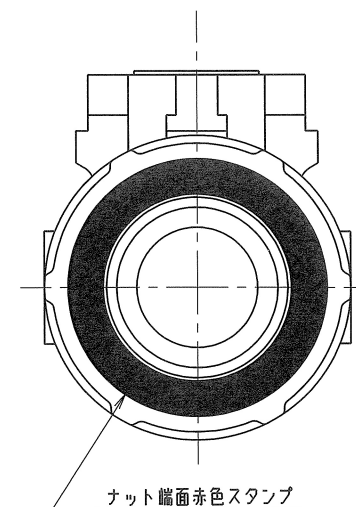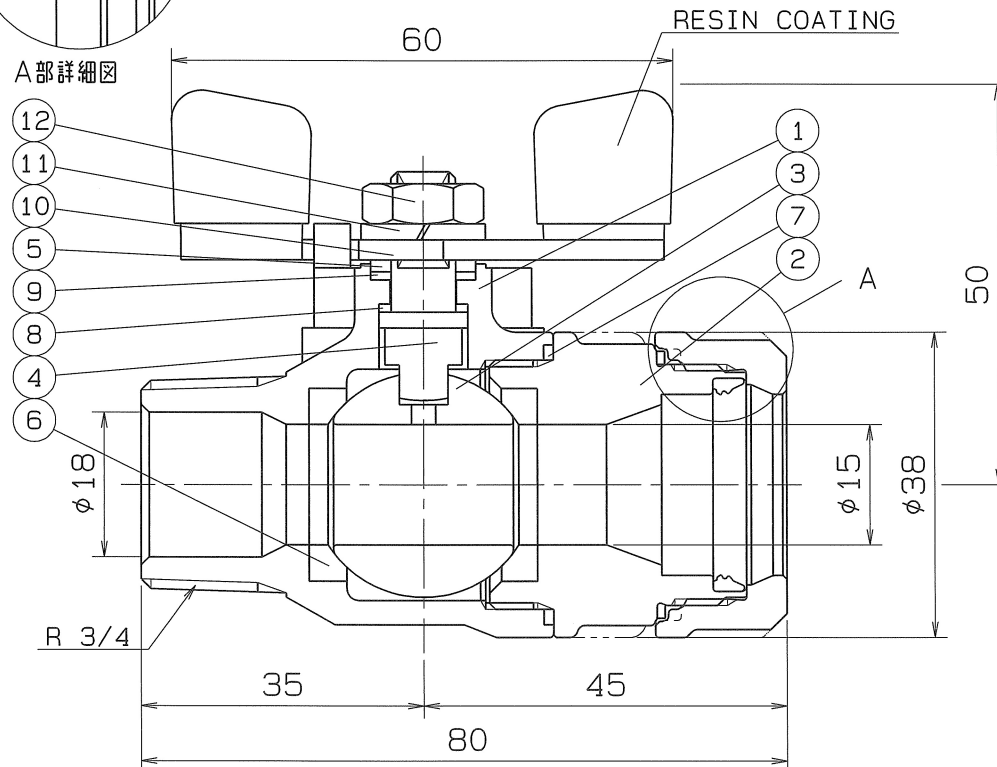

ナット端面赤色スタンプ