


◇ 1200-SWV8X XBAMS-0021

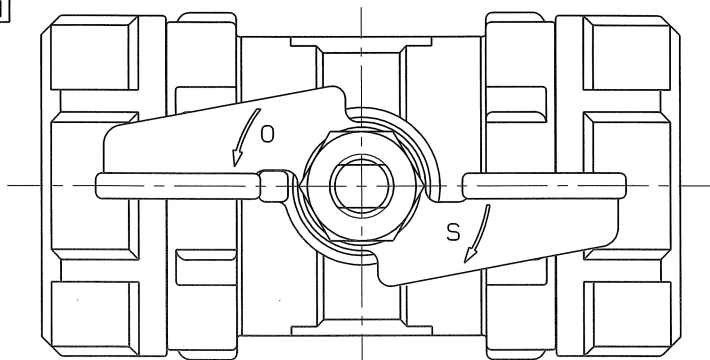

外観図

SIZE	P	L <sub>1</sub>	L <sub>2</sub>	H	W	D	Q, TY
13 Su	10	78	70	83	60	33	
20 Su	15	90	80	87	60	38	
25 Su	20	97	85	94	80	47	
30 Su	20	99	85	94	80	54	

NJSR

SPEC.			TEST PRESS.		
FLUID			SHELL	HYDRO	3.5 MPa
PRESS.	MAX	MPa	SEAT	AIR	0.6 MPa
TEMP.	MAX	℃	AIR		MPa

No.3 13Su MATERIAL : SUS 304



\*MODIFIED P.T.F.E.

17	O RING	1	FKM	
16	LOOSE STOPPER	2	SUS 304CSP	
15	RUBBER PACKING	2	SYNTHETIC RUBBER (NJSR)	
14	RATCHET NUT	2	SCS 13	
13	HEXAGON NUT	1	SUS 304	
12	SPRING WASHER	1	SUS 304	
11	HANDLE	1	SUS 304	
10	GLAND PACKING	1	P.T.F.E.	
9	BEARING	1	P.T.F.E.	CARBON FILLED
8	GASKET PACKING	2	P.T.F.E.	
7	BALL SEAT	2	P.T.F.E.	*
6	WASHER	1	SUS 304CSP	
5	GLAND BUSHING	1	SCS 13	
4	STEM	1	SUS 304	
3	BALL DISC	1	SCS 13A	
2	BODY CAP	2	SCS 13	
1	BODY	1	SCS 13	

No.	NAME OF PARTS	Q. TY	MATERIALS	REMARKS
NAME	NICE JOINT ENDS REDUCED BORE LONG NECK TYPE BALL VALVES			
TYPE	NJX-200	SIZE	13~30Su	
DMG.No.	XBAMS-0021◇	DATE	NOV. 6.2023	
THIRD ANGLE PROJECTION METHOD		SCALE	:	

APPROVED	CHECKED	DESIGNED	DRAWN

O. N. INDUSTRIES LTD.

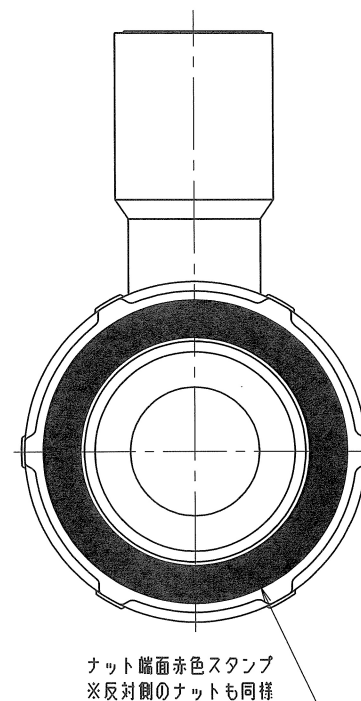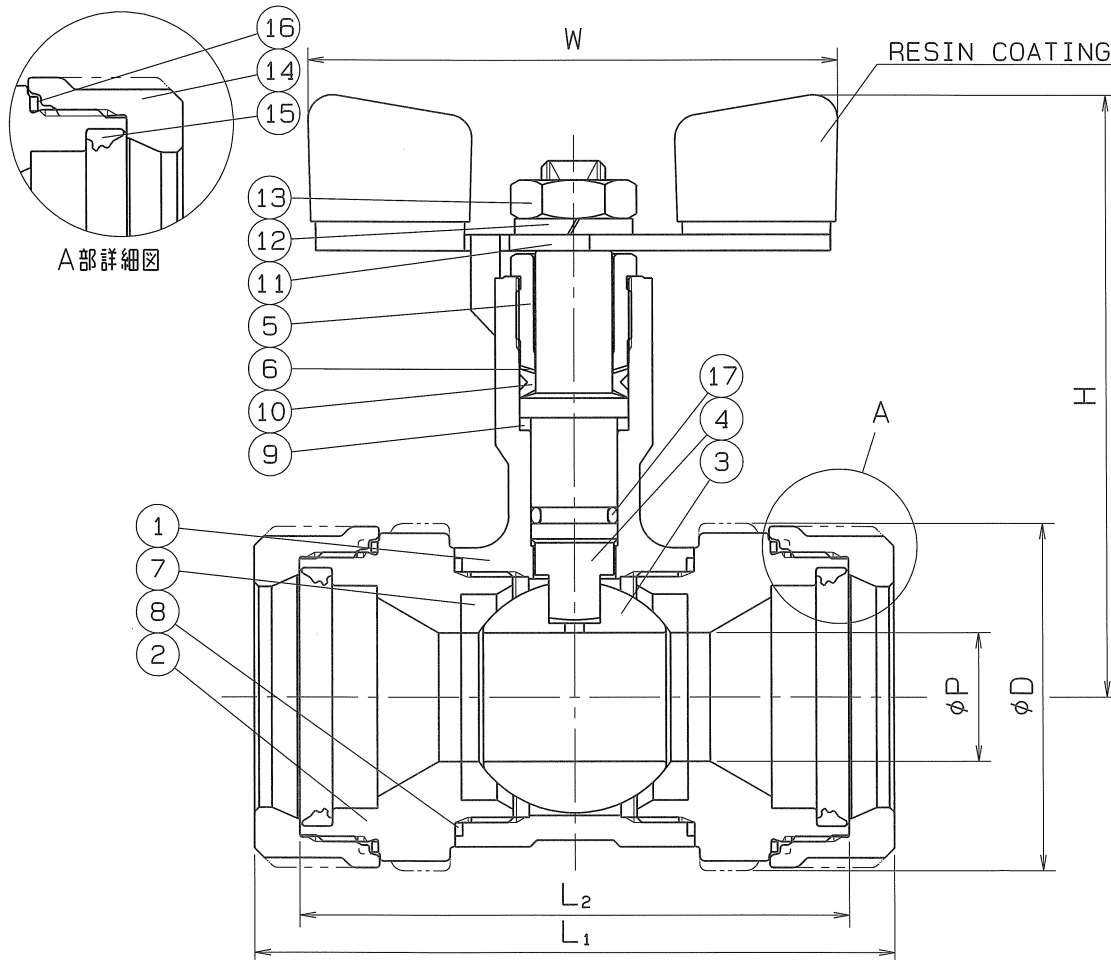

ナット端面赤色スタンプ  
※反対側のナットも同様

△		
△		
△		