


◇ 8Z00-SWVBX ON SMO

NJSR

SIZE	d	P	L	L ₁	L ₂	H ₁	H ₂	W	D	Q, TY
20Sux3/4	Rc 3/4	20	88.5	47.5	41	101	46	130	47	
25Sux1	Rc 1	25	95.5	49.5	46	104	46	130	54	

SPEC.			TEST PRESS.		
FLUID			SHELL	HYDRO	3.5 MPa
PRESS.	MAX	MPa	SEAT	AIR	0.6 MPa
TEMP.	MAX	℃		AIR	MPa

"NJSR" 赤色スタンプ

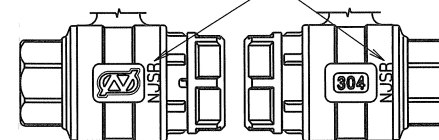

外観図

PIPE THREADS CONFORM WITH "JIS B 0203"

*MODIFIED P.T.F.E.

18	O RING	1	FKM	
17	LOOSE STOPPER	1	SUS 304CSP	
16	RUBBER PACKING	1	SYNTHETIC RUBBER (NJSR)	
15	RATCHET NUT	1	SCS 13	
14	HEXAGON NUT	1	SUS 304	
13	SPRING WASHER	1	SUS 304	
12	HANDLE	1	SUS 304	
11	GLAND PACKING	1	P.T.F.E.	
10	BEARING	1	P.T.F.E.	CARBON FILLED
9	GASKET PACKING	2	P.T.F.E.	
8	BALL SEAT	2	P.T.F.E.	*
7	WASHER	1	SUS 304CSP	
6	GLAND BUSHING	1	SCS 13	
5	STEM	1	SUS 304	
4	BALL DISC	1	SCS 13A	
3	BODY CAP (B)	1	SCS 13	Rc "d"
2	BODY CAP (A)	1	SCS 13	
1	BODY	1	SCS 13	

No.	NAME OF PARTS	Q. TY	MATERIALS	REMARKS
-----	---------------	-------	-----------	---------

NAME NICE JOINT AND SCREWED ENDS FULL BORE
LONG NECK TYPE BALL VALVES

TYPE NJX-222NF SIZE 20, 25Su


DWG.No. XBAMS-0028◇ DATE NOV. 6.2023.

THIRD ANGLE PROJECTION METHOD SCALE :



APPROVED CHECKED DESIGNED DRAWN



O. N. INDUSTRIES LTD.



A部詳細図

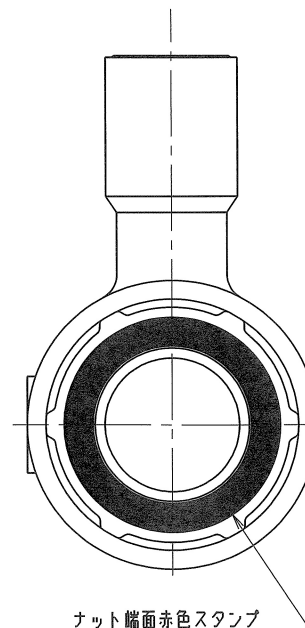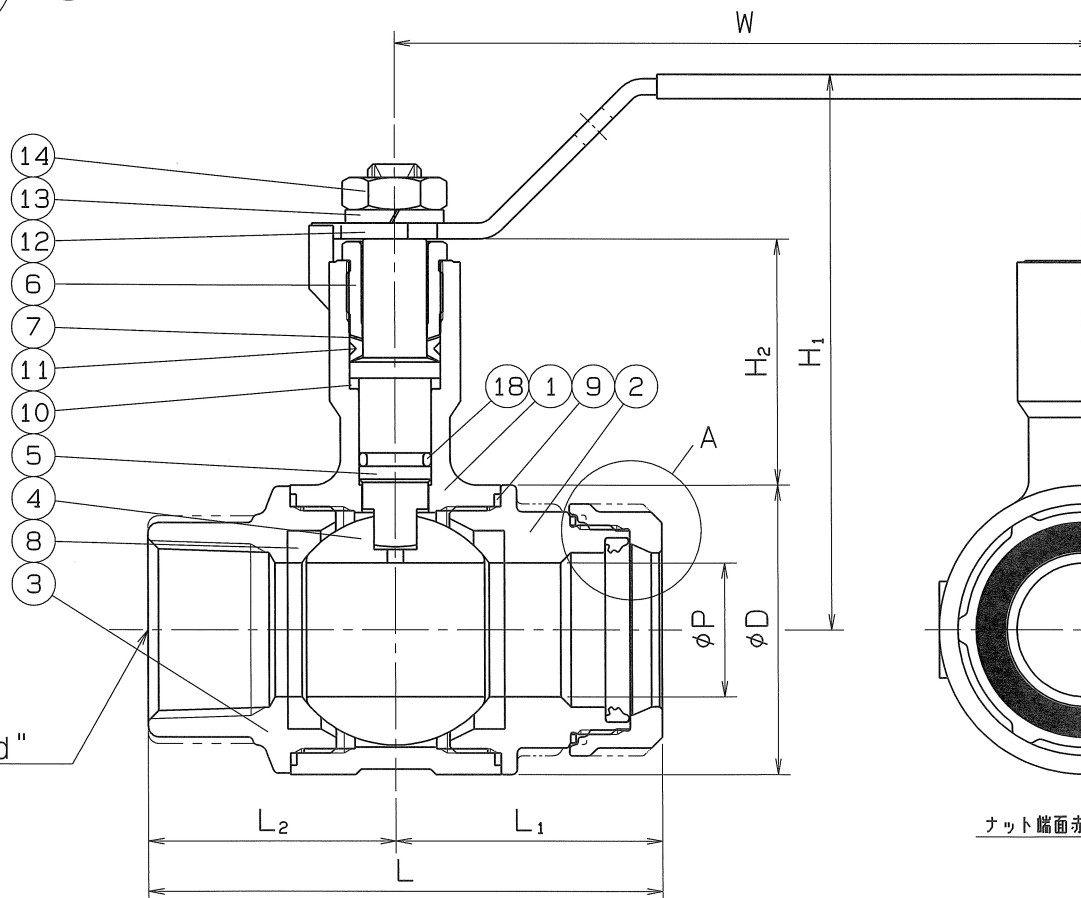

ナット端面赤色スタンプ

△		
△		
△		