
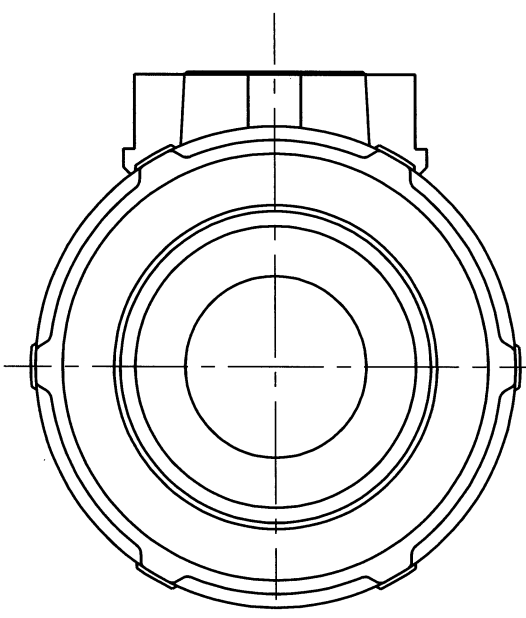


◇ 2100-SWVBX 'ON' 9MO

SIZE	PIPE THREADS	P	L	H	W	B	L ₁	D	Q, TY
	d								
13	Rc 1/2	10	69	46	60	30	35	33	
20	Rc 3/4	15	80	50	60	35	40	38	
25	Rc 1	20	88.5	58	80	40	42.5	47	
30	Rc 1	20	89.5	58	80	40	42.5	54	

SPEC.		TEST PRESS.		
FLUID		SHELL	HYDRO	3.5 MPa
PRESS.	MAX 2.0 MPa	SEAT	AIR	0.6 MPa
TEMP.	MAX 100 ℃		AIR	MPa

A
B
C
D
E
F

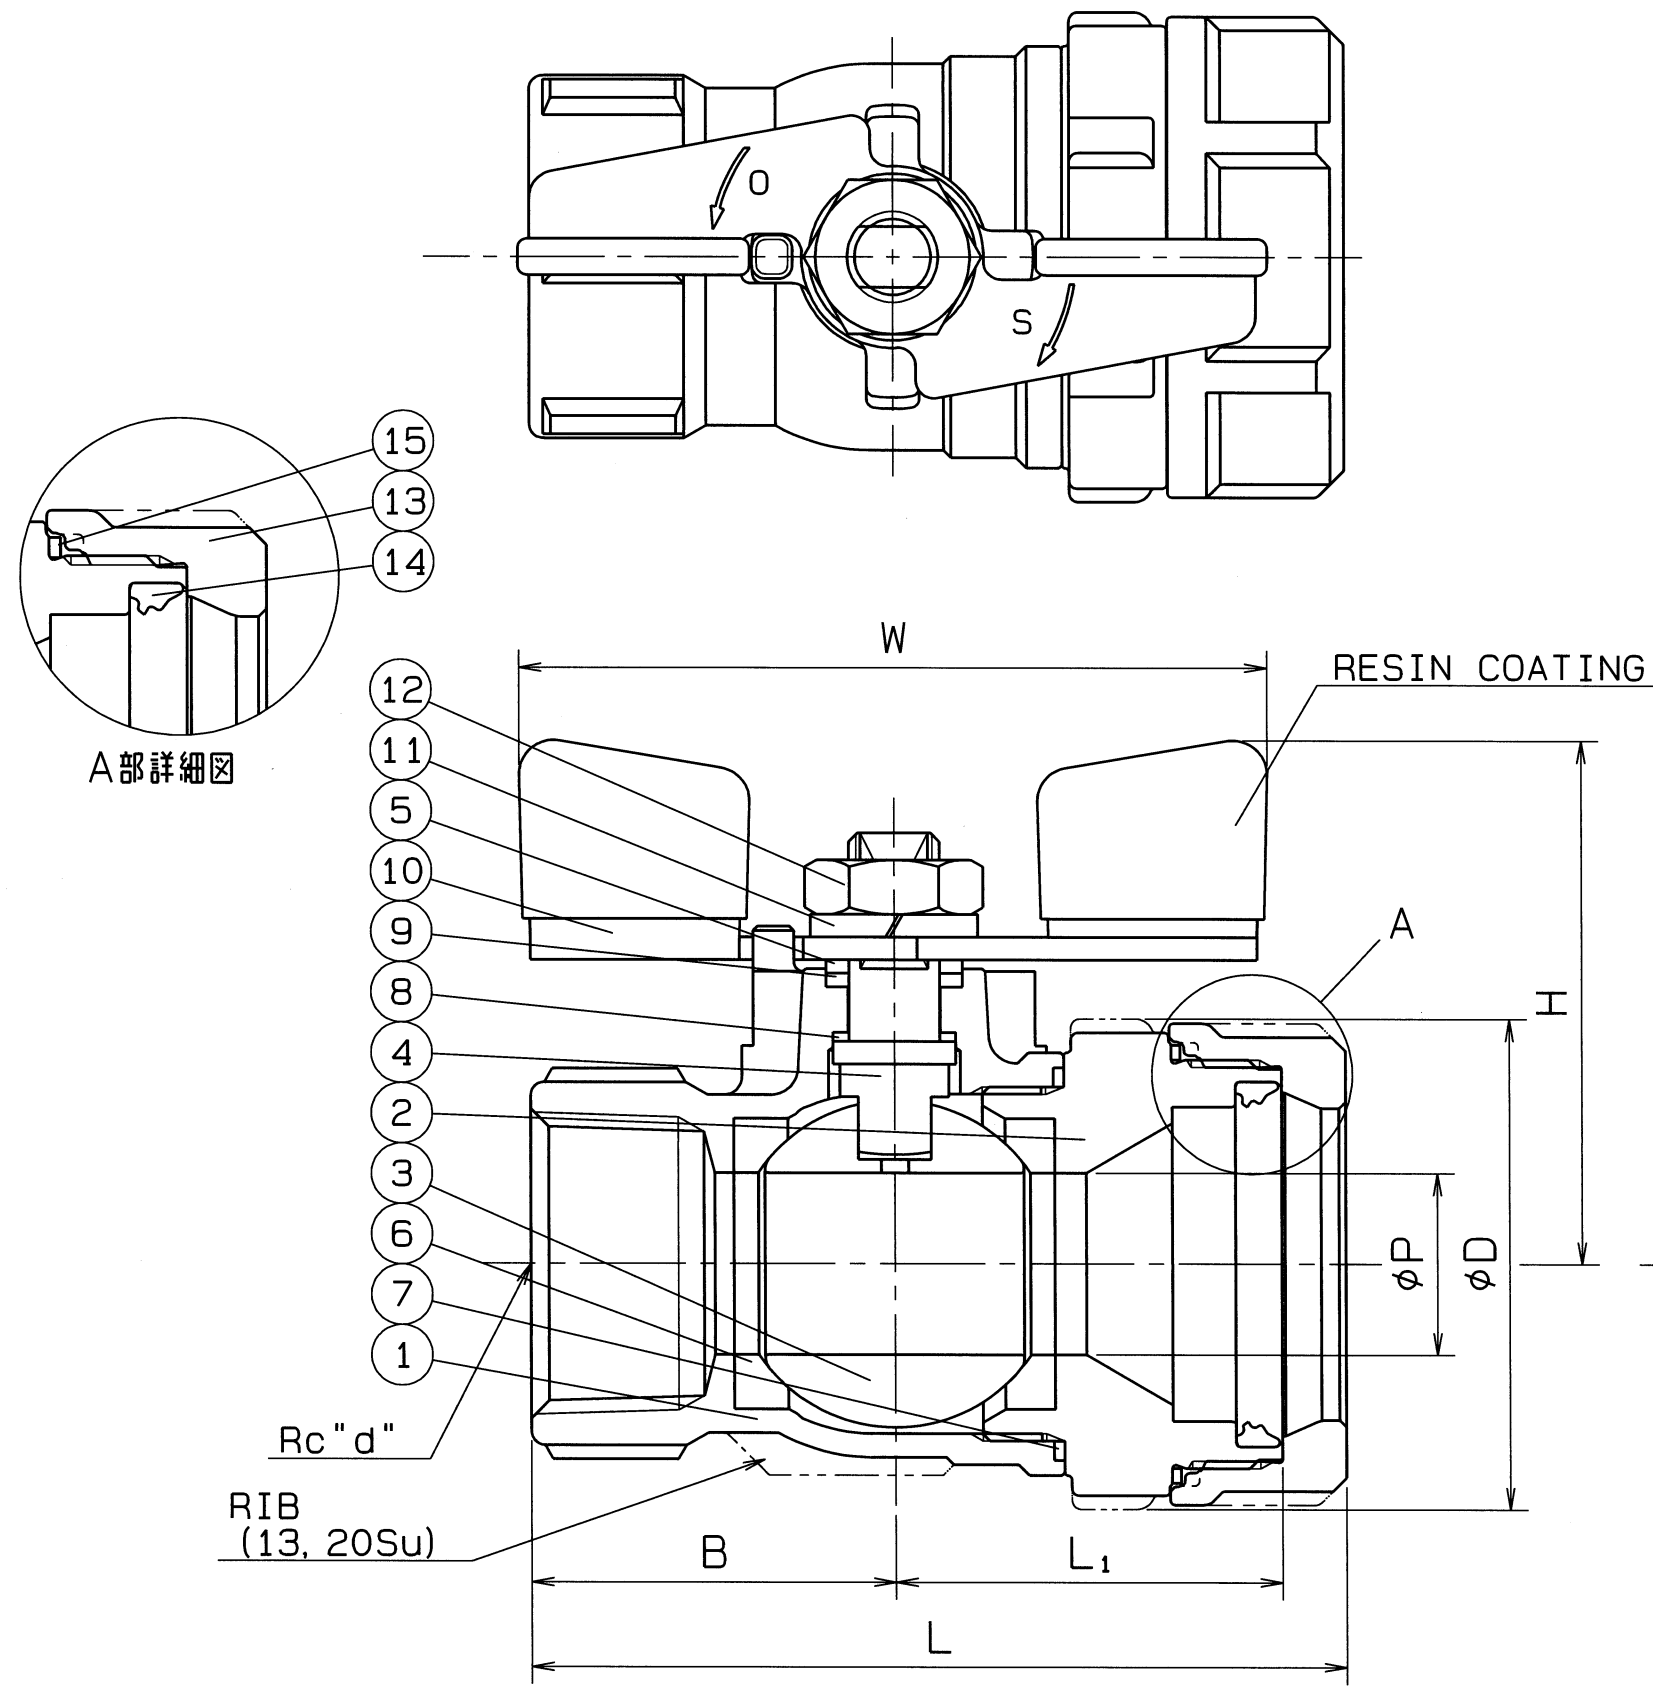

PIPE THREADS CONFORM WITH "JIS B 0203"
*MODIFIED P.T.F.E.

No.	NAME OF PARTS	Q.TY	MATERIALS	REMARKS
15	LOOSE STOPPER	1	SUS 304CSP	
14	RUBBER PACKING	1	SYNTHETIC RUBBER (HNBR)	
13	RATCHET NUT	1	SCS 13	
12	HEXAGON NUT	1	SUS 304	
11	SPRING WASHER	1	SUS 304	
10	HANDLE	1	SUS 304	
9	THRUST BEARING	1	P.T.F.E.	CARBON FILLED
8	THRUST PACKING	1	P.T.F.E.	CARBON FILLED
7	GASKET PACKING	1	P.T.F.E.	
6	BALL SEAT	2	P.T.F.E.	*
5	GLAND	1	SUS 316	
4	STEM	1	SUS 316	
3	BALL DISC	1	SCS 13A	13Su-SUS 304
2	BODY CAP	1	SCS 13	
1	BODY	1	SCS 13	

NAME	NICE JOINT AND SCREWED ENDS MINI BALL VALVES		
TYPE	NJX-610	SIZE	13~30Su
DMG.No.	XBAMS-0012◇	APPROVED BY	H. Ogawa
DATE	MAR. 14. 2023.	CHECKED BY	H. Ogawa
SCALE	:	DESIGNED BY	M. Yamashima
THIRD ANGLE PROJECTION METHOD		DRAWN BY	T. Okamoto

O. N. INDUSTRIES LTD.

△		
△		
△		