
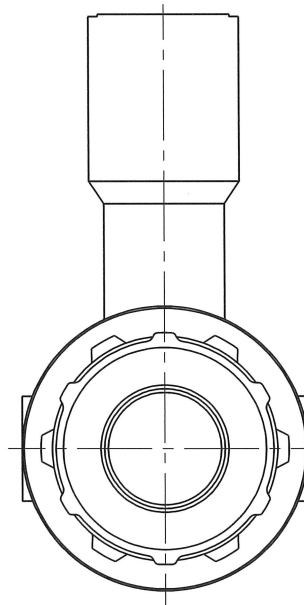
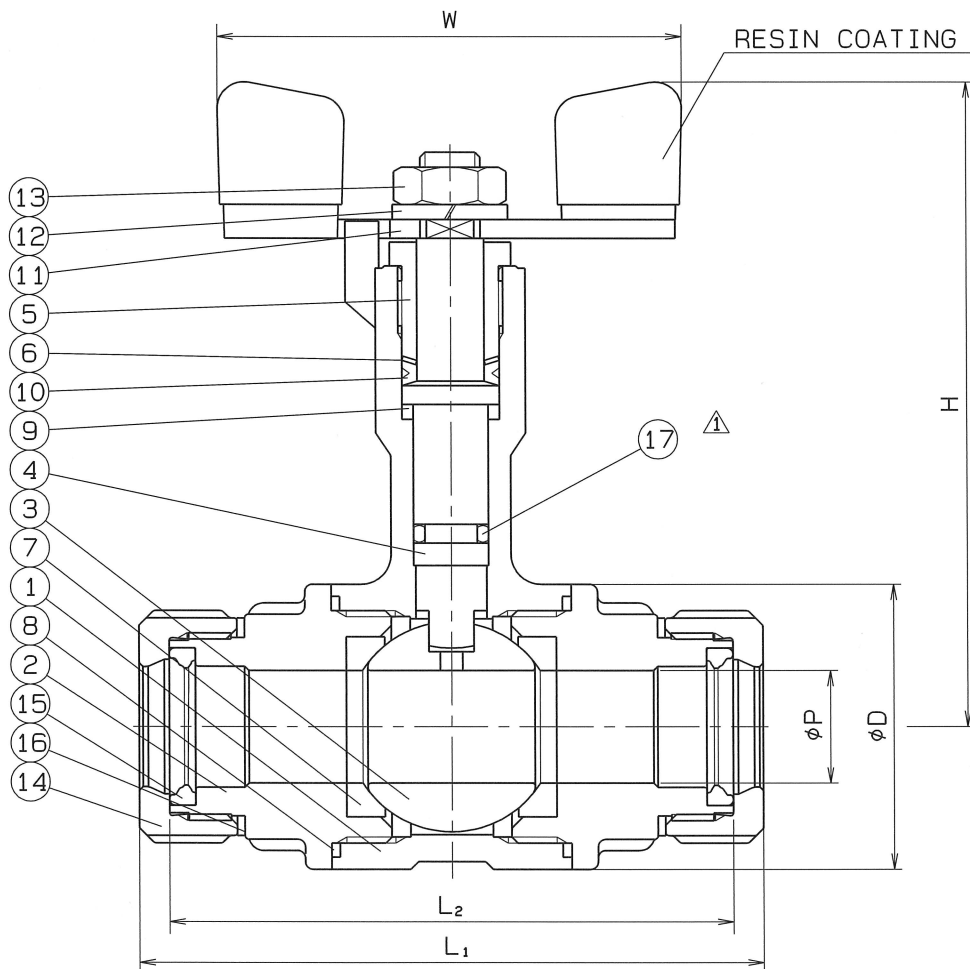


◇ 5001-SWAB BAMS-1005 DWG.No.

SIZE	P	L ₁	L ₂	H	W	D	Q.TY
13 Su	15	83	75	87	60	38	
20 Su	20	95	85	94	80	46.5	

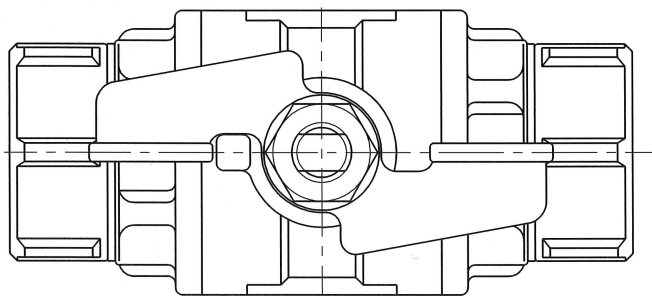

SPEC.			TEST PRESS.		
FLUID			SHELL	HYDRO	3.5 MPa
PRESS.	MAX	MPa	SEAT	AIR	0.6 MPa
TEMP.	MAX	℃		AIR	MPa

*MODIFIED TEFLON

△ 17	O RING	1	FKM	
16	CONICAL WASHER	2	NSS442M3	
15	RUBBER PACKIG	2	SYNTHETIC RUBBER (HNBR)	
14	NUT	2	SCS 13	
13	HEXAGON NUT	1	SUS 304	
12	SPRING WASHER	1	SUS 304	
11	HANDLE	1	SUS 304	
10	GLAND PACKING	1	P.T.F.E.	
9	BEARING	1	P.T.F.E.	CARBON FILLED
8	GASKET PACKING	2	P.T.F.E.	
7	BALL SEAT	2	P.T.F.E.	*
6	WASHER	1	SUS 304CSP	
5	GLAND BUSHING	1	SCS 13	
4	STEM	1	SUS 304	
3	BALL DISC	1	SCS 13A	
2	BODY CAP	2	SCS 13	
1	BODY	1	SCS 13	
No.	NAME OF PARTS	Q.TY	MATERIALS	REMARKS

NAME	NICE JOINT ENDS FULL BORE LONG NECK TYPE BALL VALVES		
TYPE	NJ-220	SIZE	13, 20Su
DWG.No.	BAMS-1005 ◇	APPROVED BY	H. Ogura
DATE	NOV. 18. 2019	CHECKED BY	H. Ogura
SCALE	:	DESIGNED BY	M. Yamashima
THIRD ANGLE PROJECTION METHOD		DRAWN BY	R. Ueki

O. N. INDUSTRIES LTD.

△		
△		
△	平ワッシャ削除、材質表記変更	2022.12.23.