


◇ 8001-SWAB BAMS-1008 DWG.No.

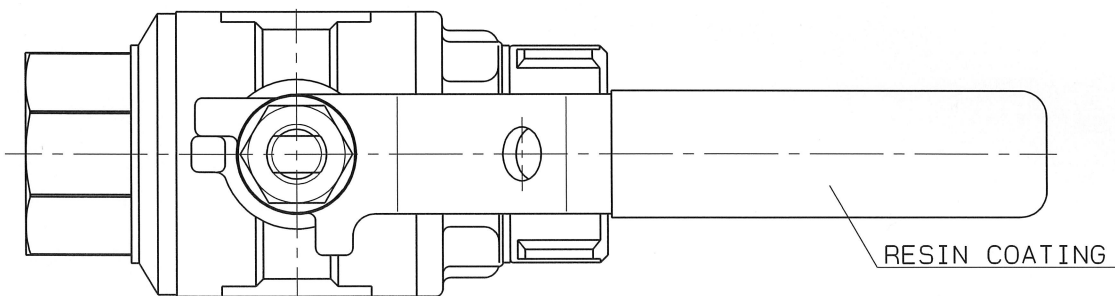


SIZE	d	P	L	L ₁	L ₂	H	W	D	Q.TY
20Sux3/4	Rc 3/4	20	88.5	47.5	41	101	130	47	
25Sux1	Rc 1	25	95.5	49.5	46	104	130	54	

SPEC.			TEST PRESS.	
FLUID			SHELL	HYDRO 3.5 MPa
PRESS.	MAX	MPa	SEAT	AIR 0.6 MPa
TEMP.	MAX	℃	AIR	MPa

PIPE THREADS CONFORM WITH "JIS B 0203"
*MODIFIED TEFLON

18	O RING	1	FKM	
17	CONICAL WASHER	1	NSS442M3	
16	RUBBER PACKIG	1	SYNTHETIC RUBBER (HNBR)	
15	NUT	1	SCS 13	
14	HEXAGON NUT	1	SUS 304	
13	SPRING WASHER	1	SUS 304	
12	HANDLE	1	SUS 304	
11	GLAND PACKING	1	P.T.F.E.	
10	BEARING	1	P.T.F.E.	CARBON FILLED
9	GASKET PACKING	2	P.T.F.E.	
8	BALL SEAT	2	P.T.F.E.	*
7	WASHER	1	SUS 304CSP	
6	GLAND BUSHING	1	SCS 13	
5	STEM	1	SUS 304	
4	BALL DISC	1	SCS 13A	
3	BODY CAP (B)	1	SCS 13	Rc d
2	BODY CAP (A)	1	SCS 13	
1	BODY	1	SCS 13	
No.	NAME OF PARTS	Q.TY	MATERIALS	REMARKS
NAME NICE JOINT AND SCREWED ENDS FULL BORE LONG NECK TYPE BALL VALVES				
TYPE	NJ-222NF	SIZE	20, 25Su	
DWG.No.	BAMS-1008 ◇	APPROVED BY	H. Ogawa	
DATE	NOV. 18. 2019	CHECKED BY	H. Ogawa	
SCALE	:	DESIGNED BY	M. Yamashima	
THIRD ANGLE PROJECTION METHOD		DRAWN BY	R. Ueki	

O. N. INDUSTRIES LTD.

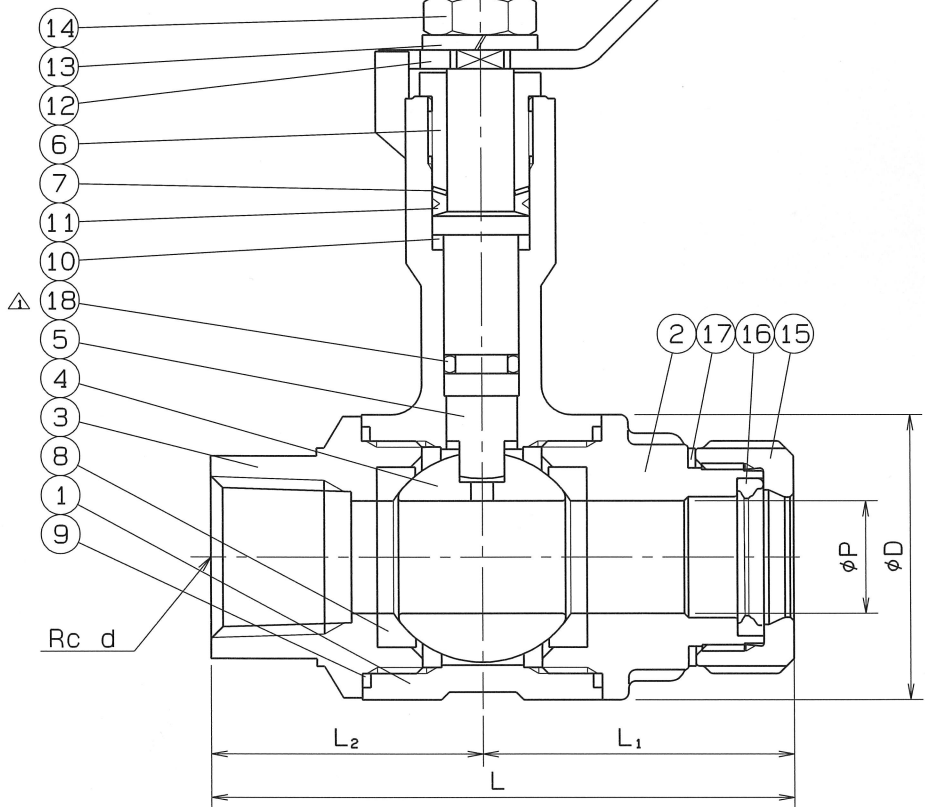

△		
△		
△	平ワッシャ削除、材質表記変更	2022.12.23.