

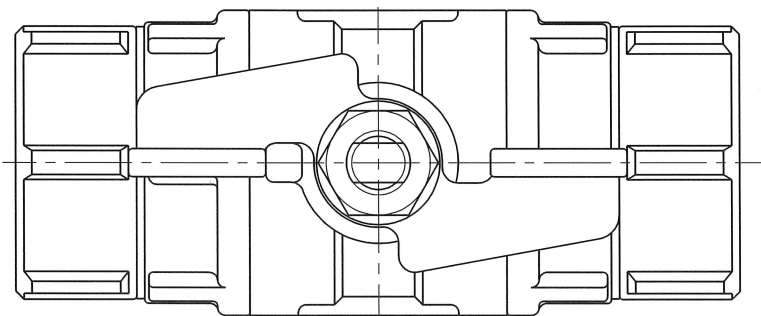


8860-SWVB ON: ONO

SIZE	P	L ₁	L ₂	H	W	D	Q. TY
13 Su	10	78	70	46	60	33	
20 Su	15	90	80	50	60	38	
25 Su	20	97	85	58	80	47	

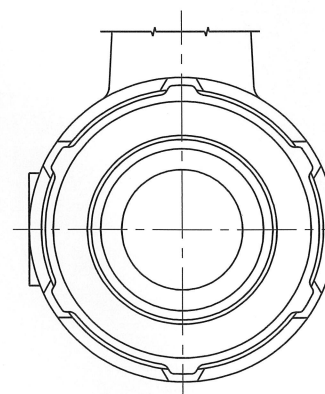

RESIN COATING

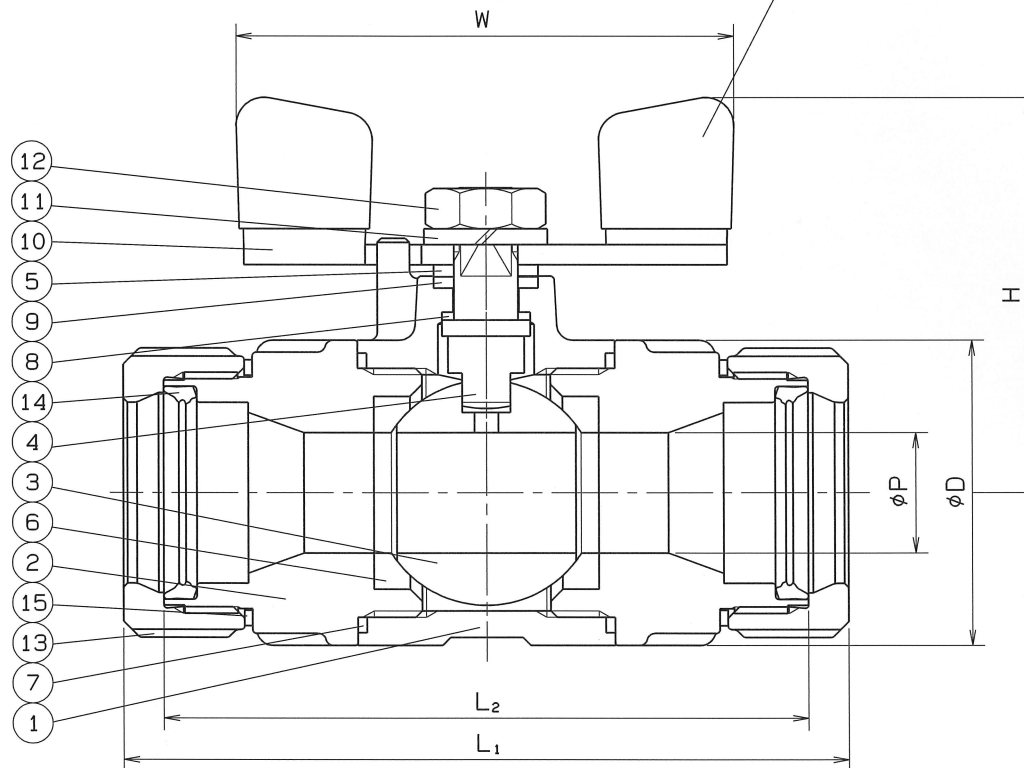

SPEC.			TEST PRESS.		
FLUID			SHELL	HYDRO	3.5 MPa
PRESS.	MAX	MPa	SEAT	AIR	0.6 MPa
TEMP.	MAX	℃		AIR	MPa

PIPE THREADS CONFORM WITH "JIS B 0203"

*MODIFIED TEFLON

15	CONICAL WASHER	2	NSS442M3	
14	RUBBER PACKING	2	SYNTHETIC RUBBER (HNBR)	
13	NUT	2	SCS 13	
12	HEXAGON NUT	1	SUS 304	
11	SPRING WASHER	1	SUS 304	
10	HANDLE	1	SUS 304	
9	THRUST BEARING	1	P.T.F.E.	CARBON FILLED
8	THRUST PACKING	1	P.T.F.E.	CARBON FILLED
7	GASKET PACKING	2	P.T.F.E.	
6	BALL SEAT	2	P.T.F.E.	*
5	GLAND	1	SUS 316	
4	STEM	1	SUS 316	
3	BALL DISC	1	SCS 13A	13Su-SUS 304
2	BODY CAP	2	SCS 13	
1	BODY	1	SCS 13	

No.	NAME OF PARTS	Q. TY	MATERIALS	REMARKS
NAME NICE JOINT ENDS REDUCED BORE BALL VALVES				
TYPE	NJ-310	SIZE	13~25Su	
DWG.No.	BAMS-0988	APPROVED BY	H. Ogura	
DATE	AUG. 23. 2013	CHECKED BY	H. Ogura	
SCALE	:	DESIGNED BY	M. Yamashita	
THIRD ANGLE PROJECTION METHOD		DRAWN BY	R. Ueki	

O. N. INDUSTRIES LTD.