



◇ Z860-SWAB 0N. ONO

SIZE	P	L ₁	L ₂	H	W	D	Q, TY
13 Su	10	78	70	50	100	33	
20 Su	15	90	80	54	100	38	
25 Su	20	97	85	64	130	47	

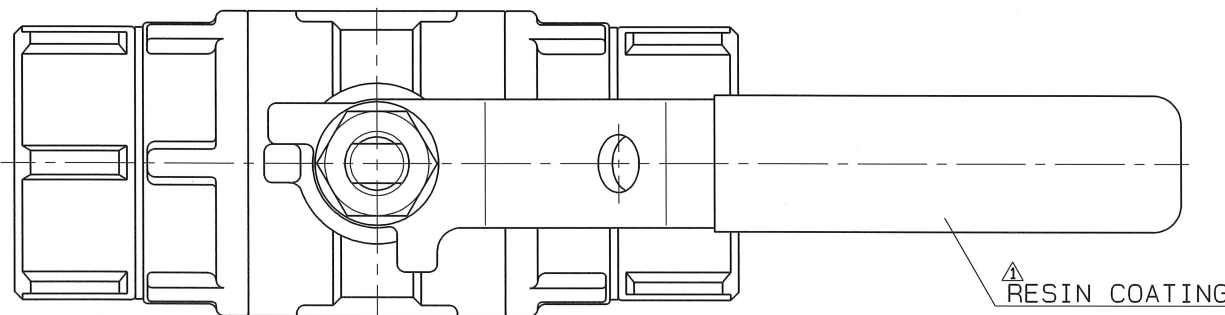

SPEC.			TEST PRESS.	
FLUID			SHELL	HYDRO 3.5 MPa
PRESS.	MAX	MPa	SEAT	AIR 0.6 MPa
TEMP.	MAX	℃		AIR MPa

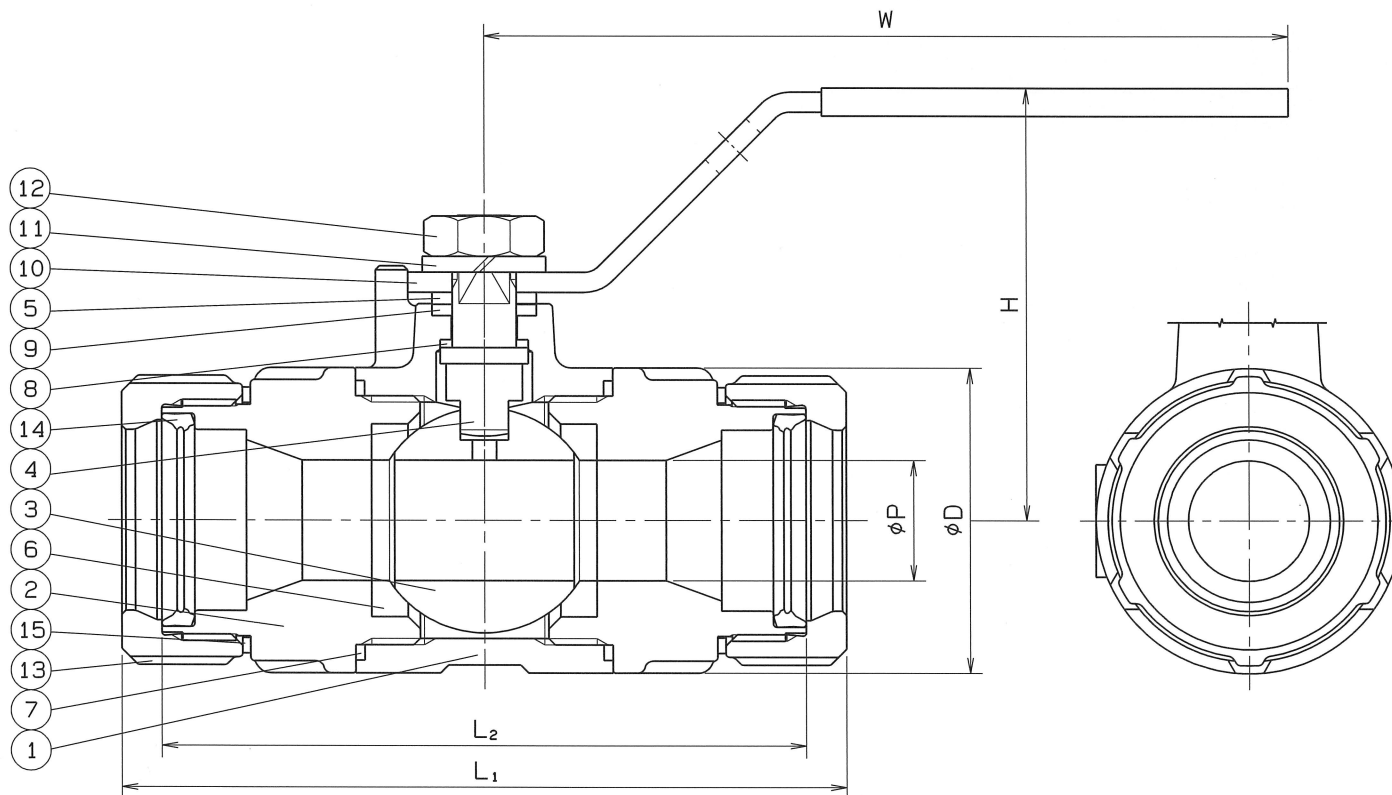

PIPE THREADS CONFORM WITH "JIS B 0203"

△ *MODIFIED TEFLON

15	CONICAL WASHER	2	NSS442M3	
14	RUBBER PACKING	2	SYNTHETIC RUBBER (HNBR)	
13	NUT	2	SCS 13	
12	HEXAGON NUT	1	SUS 304	
11	SPRING WASHER	1	SUS 304	
10	HANDLE	1	SUS 304	
9	THRUST BEARING	1	P.T.F.E.	CARBON FILLED
8	THRUST PACKING	1	P.T.F.E.	CARBON FILLED
7	GASKET PACKING	2	P.T.F.E.	
6	BALL SEAT	2	P.T.F.E.	*
5	GLAND	1	SUS 316	
4	STEM	1	SUS 316	
3	BALL DISC	1	SCS 13A	13Su-SUS 304
2	BODY CAP	2	SCS 13	
1	BODY	1	SCS 13	

No.	NAME OF PARTS	Q.TY	MATERIALS	REMARKS
NAME NICE JOINT ENDS REDUCED BORE BALL VALVES				
TYPE	NJ-310	SIZE	13~25Su	
DWG.No.	BAMS-0987 ◇	APPROVED BY	H. Ogura	
DATE	AUG. 23. 2013	CHECKED BY	H. Ogura	
SCALE	:	DESIGNED BY	M. Yamashita	
THIRD ANGLE PROJECTION METHOD		DRAWN BY	R. Ueki	

O. N. INDUSTRIES LTD.