
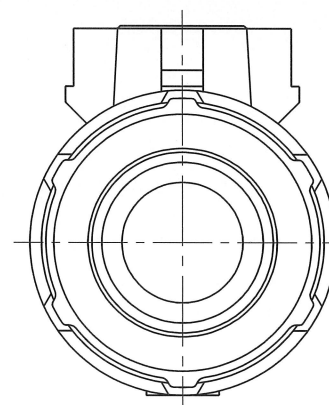


◇ E880-SMVB '04.04.01

SIZE	PIPE THREADS d	P	L	H	W	A	L ₁	D	Q.TY
△ 13	Rc 1/2	10	69	46	60	30	35	31	
△ 20	Rc 3/4	15	80	50	60	35	40	36	
△ 25	Rc 1	20	88.5	58	80	40	42.5	46	
30	Rc 1	20	89.5	58	80	40	42.5	53	

SPEC.			TEST PRESS.		
FLUID			SHELL	HYDRO	3.5 MPa
△ PRESS.	MAX	MPa	SEAT	AIR	0.6 MPa
△ TEMP.	MAX	℃		AIR	MPa

△ RESIN COATING

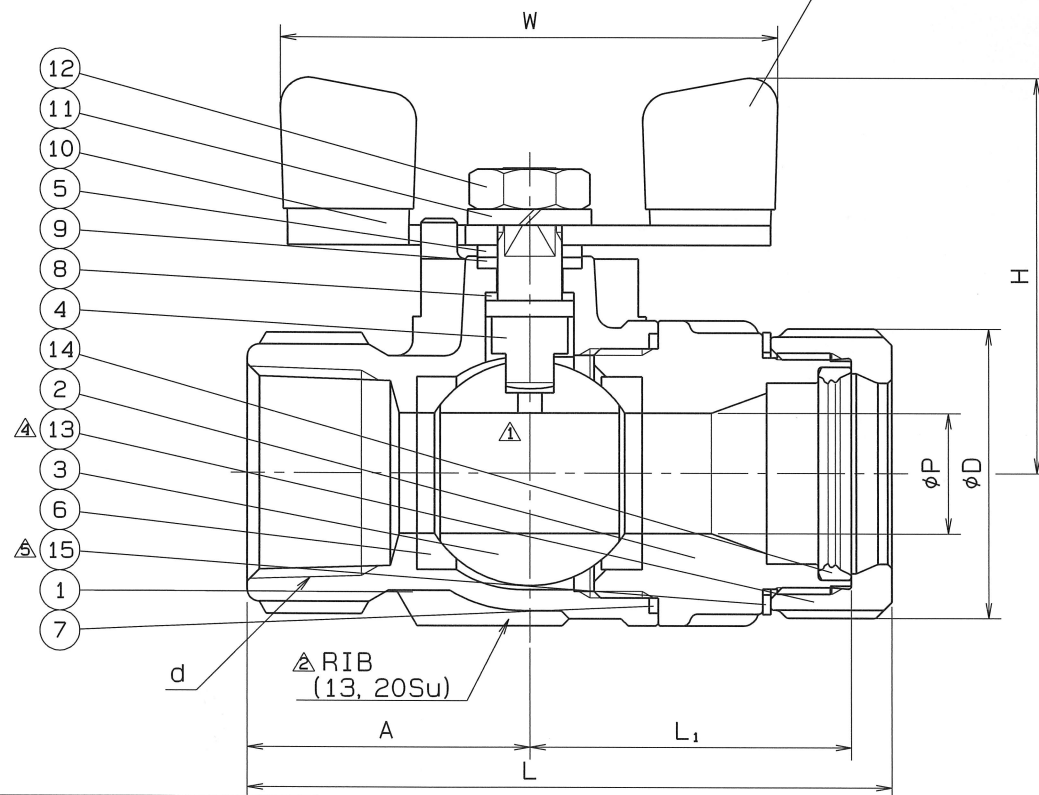

PIPE THREADS CONFORM WITH "JIS B 0203"

△ *MODIFIED TEFLON

△ 15	CONICAL WASHER	1	NSS442M3	
14	RUBBER PACKING	1	SYNTHETIC RUBBER (HNBR)	
△ 13	NUT	1	SCS 13	
12	HEXAGON NUT	1	SUS 304	
11	SPRING WASHER	1	SUS 304	
10	HANDLE	1	SUS 304	
9	THRUST BEARING	1	P.T.F.E.	CARBON FILLED
8	THRUST PACKING	1	P.T.F.E.	CARBON FILLED
7	GASKET PACKING	1	P.T.F.E.	
△ 6	BALL SEAT	2	P.T.F.E.	*
5	GLAND	1	SUS 316	
4	STEM	1	SUS 316	
△ 3	BALL DISC	1	SCS 13A	13Su-SUS 304
2	BODY CAP	1	SCS 13	
1	BODY	1	SCS 13	
No.	NAME OF PARTS	Q.TY	MATERIALS	REMARKS

NAME NICE JOINT AND SCREWED ENDS BALL VALVES

TYPE NJ-610 SIZE 13~30Su

DWG.No. BAMS-0883 ◇ APPROVED BY H. Ogura

DATE NOV. 21. 2002. CHECKED BY H. Ogura

SCALE : DESIGNED BY M. Yamashita

THIRD ANGLE PROJECTION METHOD DRAWN BY R. Ueki

O. N. INDUSTRIES LTD.

△ 注記・図ワッシャ材質変更	2019. 12. 3.
△ 使用圧力、使用温度追加	H24. 1. 13.
△ 検査圧力の変更	H23. 2. 9.
△ 図ワッシャ材質変更	H22. 2. 10.