

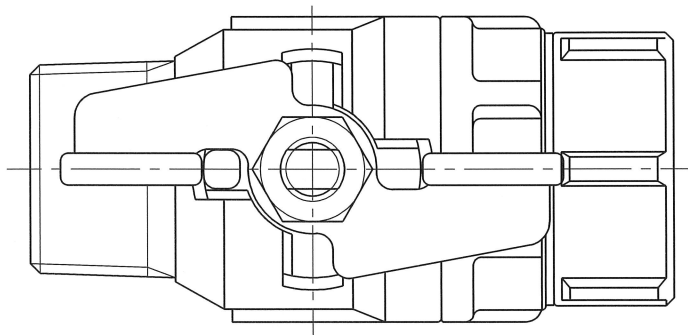


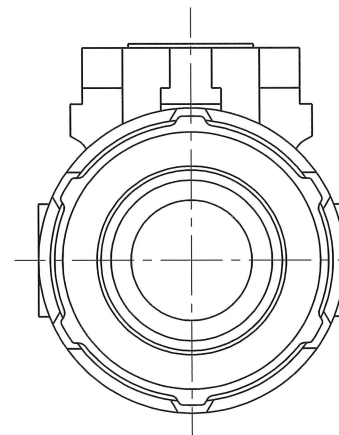

SPEC.			TEST PRESS.	
FLUID			SHELL HYDRO	3.5 MPa
PRESS.	MAX	MPa	SEAT AIR	0.6 MPa
TEMP.	MAX	℃	AIR	MPa

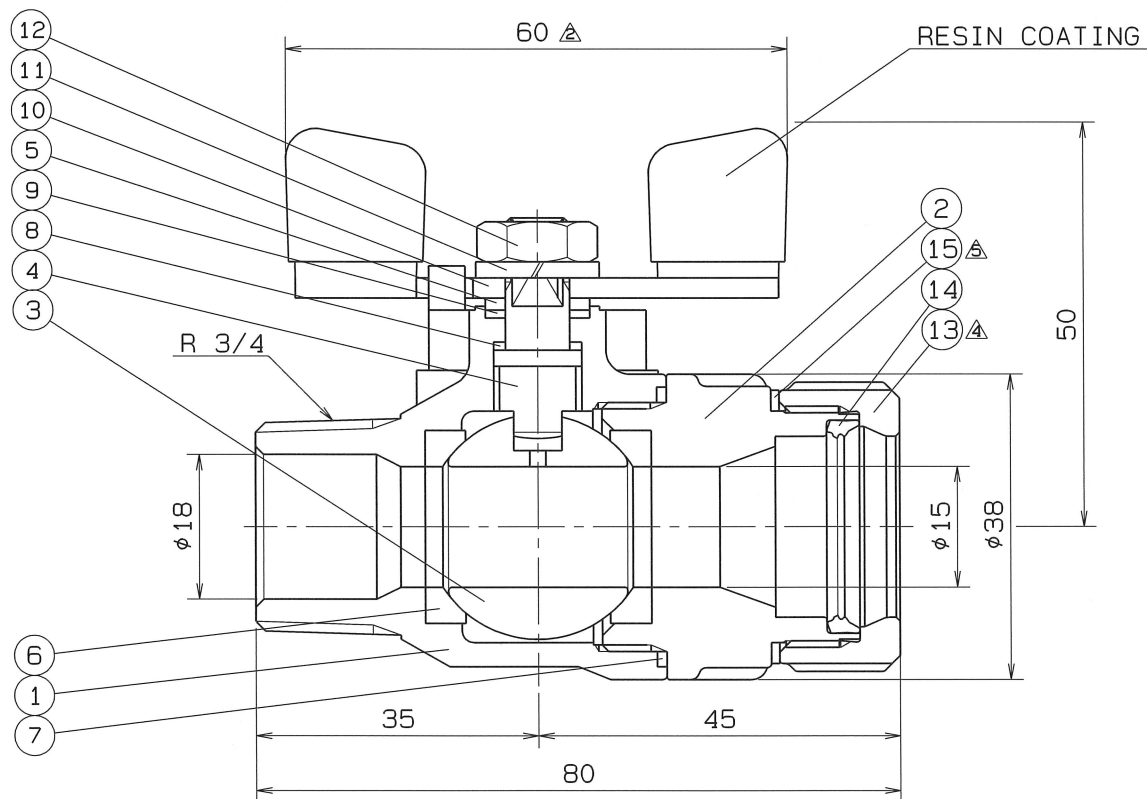

PIPE THREADS CONFORM WITH 'JIS B 0203'

*MODIFIED TEFLON

15	CONICAL WASHER	1	NSS442M3	
14	RUBBER PACKING	1	SYNTHETIC RUBBER (HNBR)	
13	NUT	1	SCS 13	
12	HEXAGON NUT	1	SUS 304	
11	SPRING WASHER	1	SUS 304	
10	HANDLE	1	SUS 304	
9	THRUST BEARING	1	P.T.F.E.	CARBON FILLED
8	THRUST PACKING	1	P.T.F.E.	CARBON FILLED
7	GASKET PACKING	1	P.T.F.E.	
6	BALL SEAT	2	P.T.F.E.	*
5	GLAND	1	SUS 316	
4	STEM	1	SUS 316	
3	BALL DISC	1	SCS 13A	
2	BODY CAP	1	SCS 13	
1	BODY	1	SCS 13	

No.	NAME OF PARTS	Q.TY	MATERIALS	REMARKS
NAME NICE JOINT AND SCREWED ENDS BALL VALVES				
TYPE	NJ-611	SIZE	20Sux3/4B	
DMG.No.	BAMS-0914	APPROVED BY	H. Ogura	
DATE	OCT. 28. 2006	CHECKED BY	H. Ogura	
SCALE	:	DESIGNED BY	M. Yamashita	
THIRD ANGLE PROJECTION METHOD		DRAWN BY	R. Ueki	

注記・皿ワッシャ材質変更	2019. 12. 3.
使用圧力、使用温度追加	H24. 1. 13.
検査圧力の変更	H23. 2. 9.
皿ワッシャ材質変更	H22. 2. 10.

O. N. INDUSTRIES LTD.