



◇ E660-SWVB 'ON' GND

Q. TY: _____

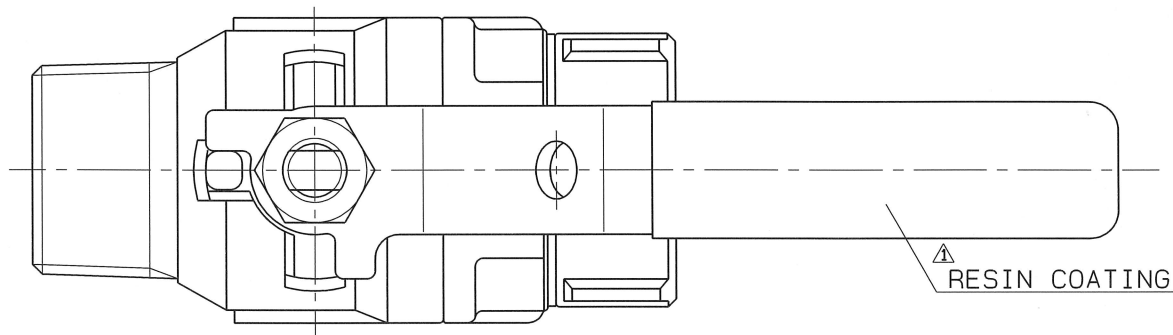

SPEC .			TEST PRESSURE	
FLUID		MPa	SHELL	HYDRO 3.5 MPa
PRESS.	MAX	MPa	SEAT	AIR 0.6 MPa
TEMP.	MAX	℃	AIR	MPa

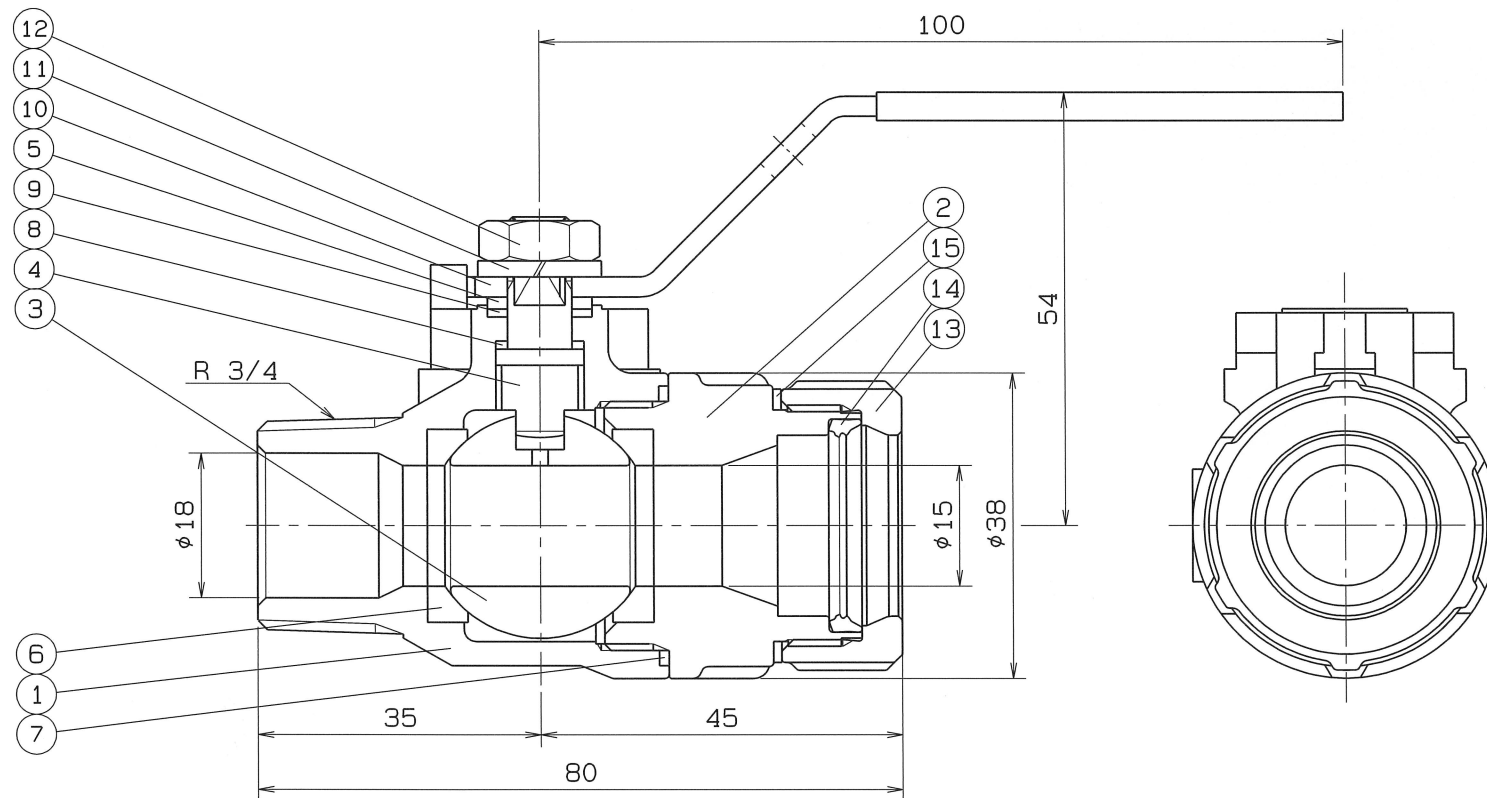

PIPE THREADS CONFORM WITH "JIS B 0203"
 △ *MODIFIED TEFLON

15	CONICAL WASHER	1	NSS442M3	
14	RUBBER PACKING	1	SYNTHETIC RUBBER (HNBR)	
13	NUT	1	SCS 13	
12	HEXAGON NUT	1	SUS 304	
11	SPRING WASHER	1	SUS 304	
10	HANDLE	1	SUS 304	
9	THRUST BEARING	1	P.T.F.E.	CARBON FILLED
8	THRUST PACKING	1	P.T.F.E.	CARBON FILLED
7	GASKET PACKING	1	P.T.F.E.	
6	BALL SEAT	2	P.T.F.E.	*
5	GLAND	1	SUS 316	
4	STEM	1	SUS 316	
3	BALL DISC	1	SCS 13A	
2	BODY CAP	1	SCS 13	
1	BODY	1	SCS 13	
No.	NAME OF PARTS	Q.TY	MATERIALS	REMARKS
NAME	NICE JOINT AND SCREWED ENDS BALL VALVES			
TYPE	NJ-611	SIZE	20Sux3/4B	
ENG.No.	BAMS-0993 ◇	APPROVED BY	H. Ogura	
DATE	JUL. 6.2016	CHECKED BY	H. Ogura	
SCALE	:	DESIGNED BY	M. Yamashima	
THIRD ANGLE PROJECTION METHOD		DRAWN BY	R. Ueki	

△		
△		
△	注記・皿ワッシャ材質変更	2019.12.3.

O. N. INDUSTRIES LTD.