



1960-SWAB 1960-SWAB

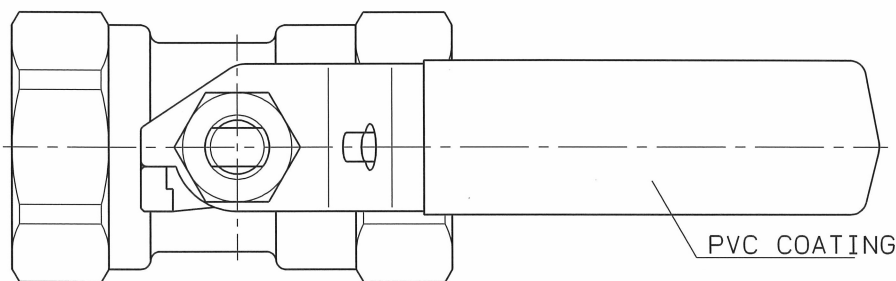

SIZE	PIPE THREADS	P	L	H	W	A	B	Q, TY
	d							
1/4	Rc 1/4	5	40	36	60	19	17	
3/8	Rc 3/8	7	42.5	41	70	21	20.5	
1/2	Rc 1/2	9	54	50	85	26.5	25	
3/4	Rc 3/4	12.5	58	53	85	29.5	30.5	
1	Rc 1	16	68.5	65	100	35	38	
1 1/4	Rc 1 1/4	20	79	68	100	40	47	
1 1/2	Rc 1 1/2	24.5	86	83	125	43.5	53.5	
2	Rc 2	32	105	89	125	53	66	

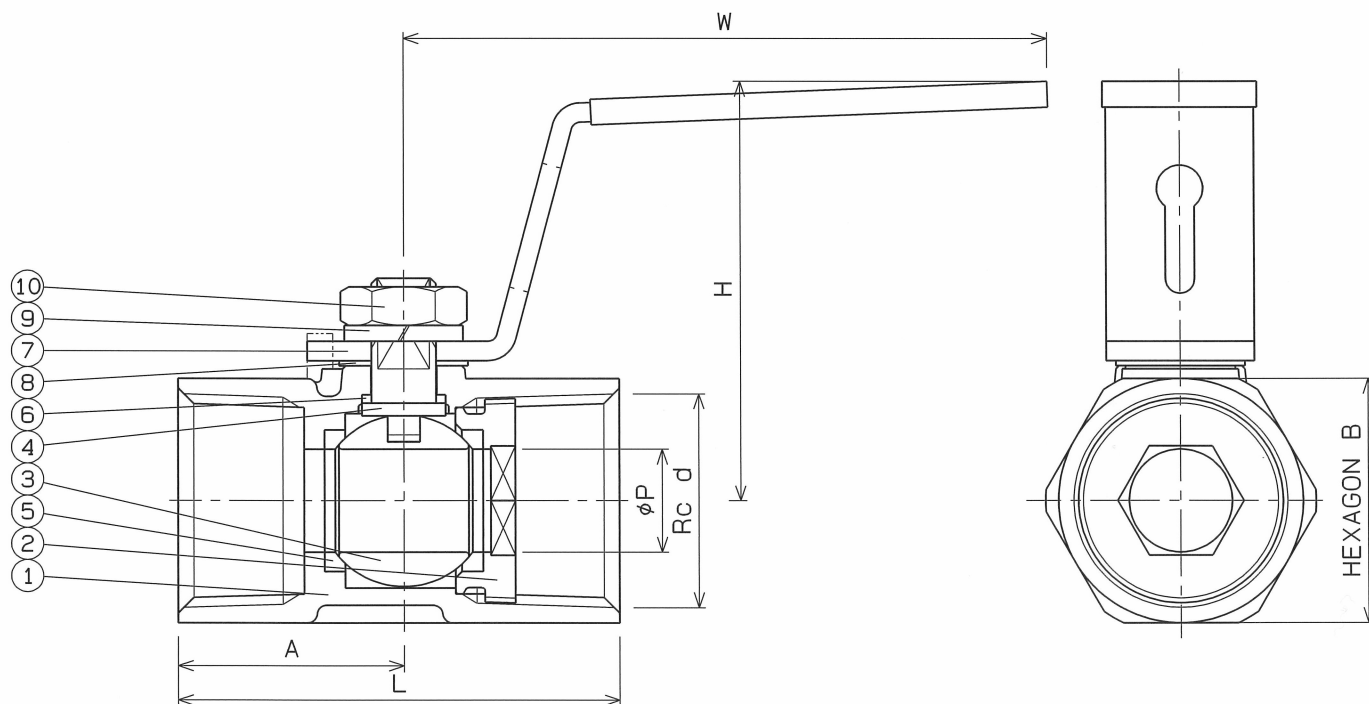

SPEC.		TEST PRESS.	
FLUID		SHELL	HYDRO 8.24 MPa
PRESS.	MPa	SEAT	AIR 0.6 MPa
TEMP.	°C	AIR	MPa

PIPE THREADS CONFORM WITH "JIS B 0203"
No.3 1 1/2, 2B MATERIAL: SCS 13

10	HEXAGON NUT	1	SUS 304	
9	SPRING WASHER	1	SUS 304	
8	CONICAL WASHER	1	SUS 304	
7	HANDLE	1	SUS 304	
6	THRUST PACKING	1	P.T.F.E.	Mo FILLED
5	BALL SEAT	2	P.T.F.E.	
4	STEM	1	SUS 304	
3	BALL DISC	1	SUS 304	
2	SEAT HOLDER	1	SCS 13	
1	BODY	1	SCS 13	
No.	NAME OF PARTS	Q.TY	MATERIALS	REMARKS
NAME 800 W.O.G. SCREWED ENDS BALL VALVES REDUCED BORE				
TYPE	N-600A	SIZE	1/4 ~ 2 B	
DMG.No.	BAMS-0951	APPROVED BY	H. Ogawa	
DATE	APR. 8.2008	CHECKED BY	H. Ogawa	
SCALE	:	DESIGNED BY	R. Matsuki	
THIRD ANGLE PROJECTION METHOD		DRAWN BY		

△	形状変更、注記表記の変更	2022.1.26.
△	ハンドルの材質変更	H30.7.25.
△	寸法表のスケール変更	H20.9.18.

O. N. INDUSTRIES LTD.