


A

B

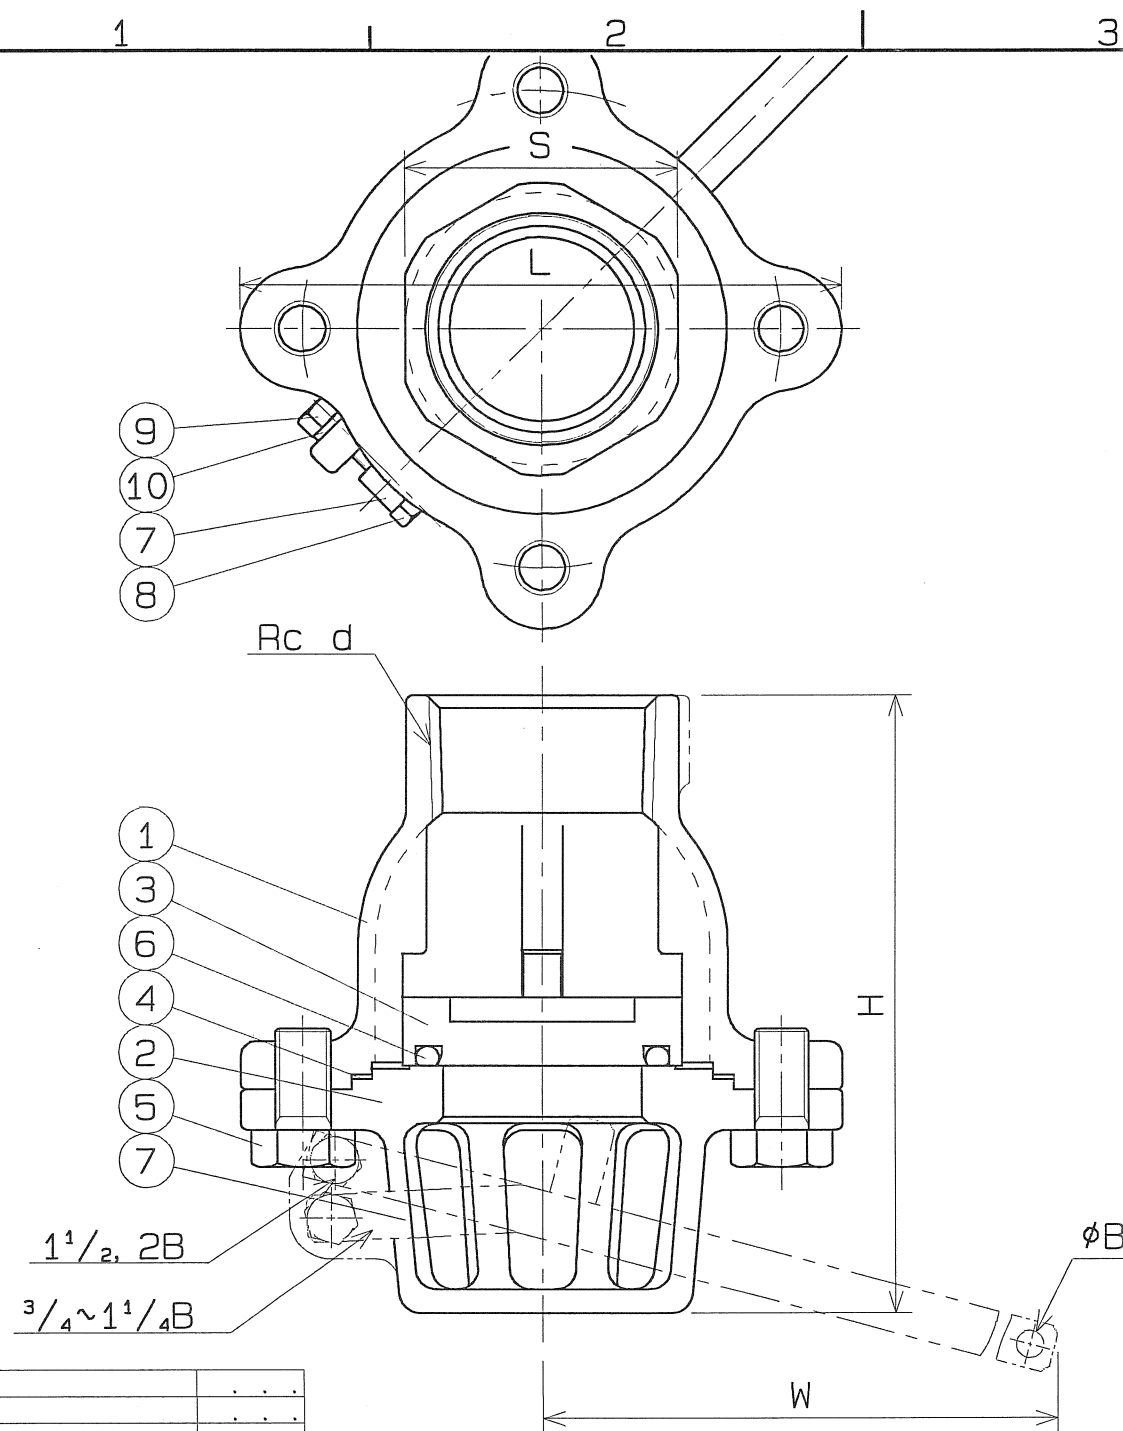

SIZE	PIPE THREAD	H	L	S	W	B	Q.TY
	d						
$\frac{3}{4}$ B	Rc $\frac{3}{4}$	80	72	33	70	4.5	
1B	Rc 1	91	88	40	86	4.5	
$1\frac{1}{4}$ B	Rc $1\frac{1}{4}$	106	102	50	89	4.5	
$1\frac{1}{2}$ B	Rc $1\frac{1}{2}$	122	124	57	95	6	
2B	Rc 2	145	142	70	106	6	

SPEC.		TEST PRESS.	
FLUID		SHELL	HYDRO 2.1 MPa (21.4 kgf/cm ²)
PRESS.	MPa (kgf/cm ²)	SEAT	AIR 0.6 MPa (6.1 kgf/cm ²)
TEMP.	°C	AIR	MPa (kgf/cm ²)

PIPE THREADS: JIS B 0203

No.5 2B Q.TY: 6

10	SPRING WASHER	1	SUS 304	
9	HEXAGON NUT	1	SUS 304	
8	HEXAGON BOLT	1	SUS 304	
7	LEVER	1	SUS 304	
6	O RING	1	NBR	
5	HEXAGON BOLT	4	SUS 304	
4	GASKET PACKING	1	P.T.F.E	
3	DISC	1	SUS 304	
2	STRAINER	1	SCS 13	
1	BODY	1	SCS 13	


No. NAME OF PARTS Q.TY MATERIALS REMARKS

NAME JIS 10K SCREWED END
FOOT VALVESTYPE N-210L SIZE $\frac{3}{4}$ B-2BDwg.No. FASS-0053 $\diamond$ APPROVED BY *K. Tanaka*DATE NOV. 24. 2004 CHECKED BY *A. Asakura*SCALE : DESIGNED BY *R. Matsuki*

THIRD ANGLE PROJECTION METHOD DRAWN BY

O. N. INDUSTRIES LTD.

$\triangle$		
$\triangle$		
$\triangle$		

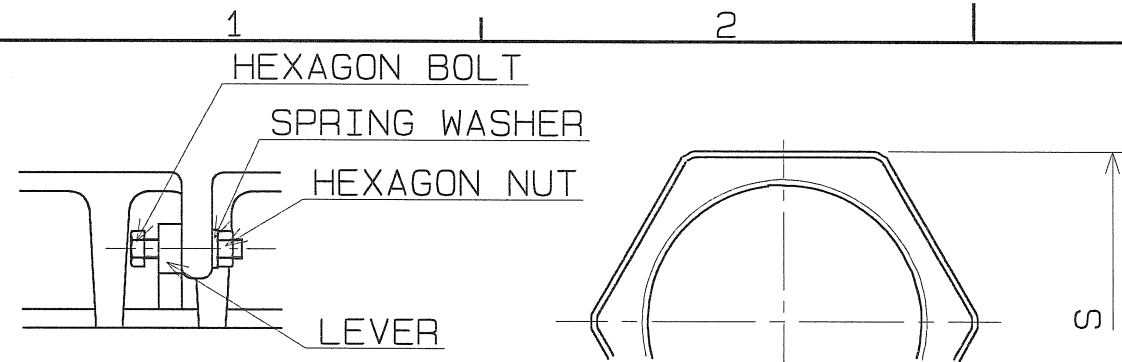

SIZE	PIPE THREAD		H	L	S	W	B	Q.TY
	d							
2 1/2 B	Rc 2 1/2		182	180	90	112	6	
3 B	Rc 3		208	217	105	125	7	

SPEC.		TEST PRESS.	
FLUID		SHELL	HYORO 2.1 MPa (21.4 kgf/cm ²)
PRESS.	MPa (kgf/cm ²)	SEAT	AIR 0.6 MPa (6.1 kgf/cm ²)
TEMP.	°C		AIR (MPa kgf/cm ²)

PIPE THREADS: JIS B 0203
No.6 3B Q.TY: 8

11	BEARING	2	P.T.F.E.	+SUS316
	SPRING WASHER	1	SUS 304	
	HEXAGON NUT	1	SUS 304	
10	HEXAGON BOLT	1	SUS 304	
9	LEVER	1	SUS 304	
8	GASKET PACKING	1	P.T.F.E	
7	O RING	1	NBR	
6	HEXAGON BOLT	6	SUS 304	
5	PIN	1	SUS 304	
4	DISC	1	SCS 13	
3	SEAT	1	SCS 13	
2	STRAINER	1	SCS 13	
1	BODY	1	SCS 13	
No.	NAME OF PARTS	Q.TY	MATERIALS	REMARKS

NAME	JIS 10K SCREWED END FOOT VALVES			
TYPE	N-210L	SIZE	2 1/2 B. 3B	
DWG.No.	FASS-0045	APPROVED BY	Y.SATO	
DATE	JUN. 12. 1993	CHECKED BY	K.TSUNETO	
SCALE	:	DESIGNED BY	K.TSUNETO	
THIRD ANGLE PROJECTION METHOD		DRAWN BY		

O. N. INDUSTRIES LTD.

△	SI単位に変更	'99. 9. 16.
△	BEARING	'94. 4. 19.