


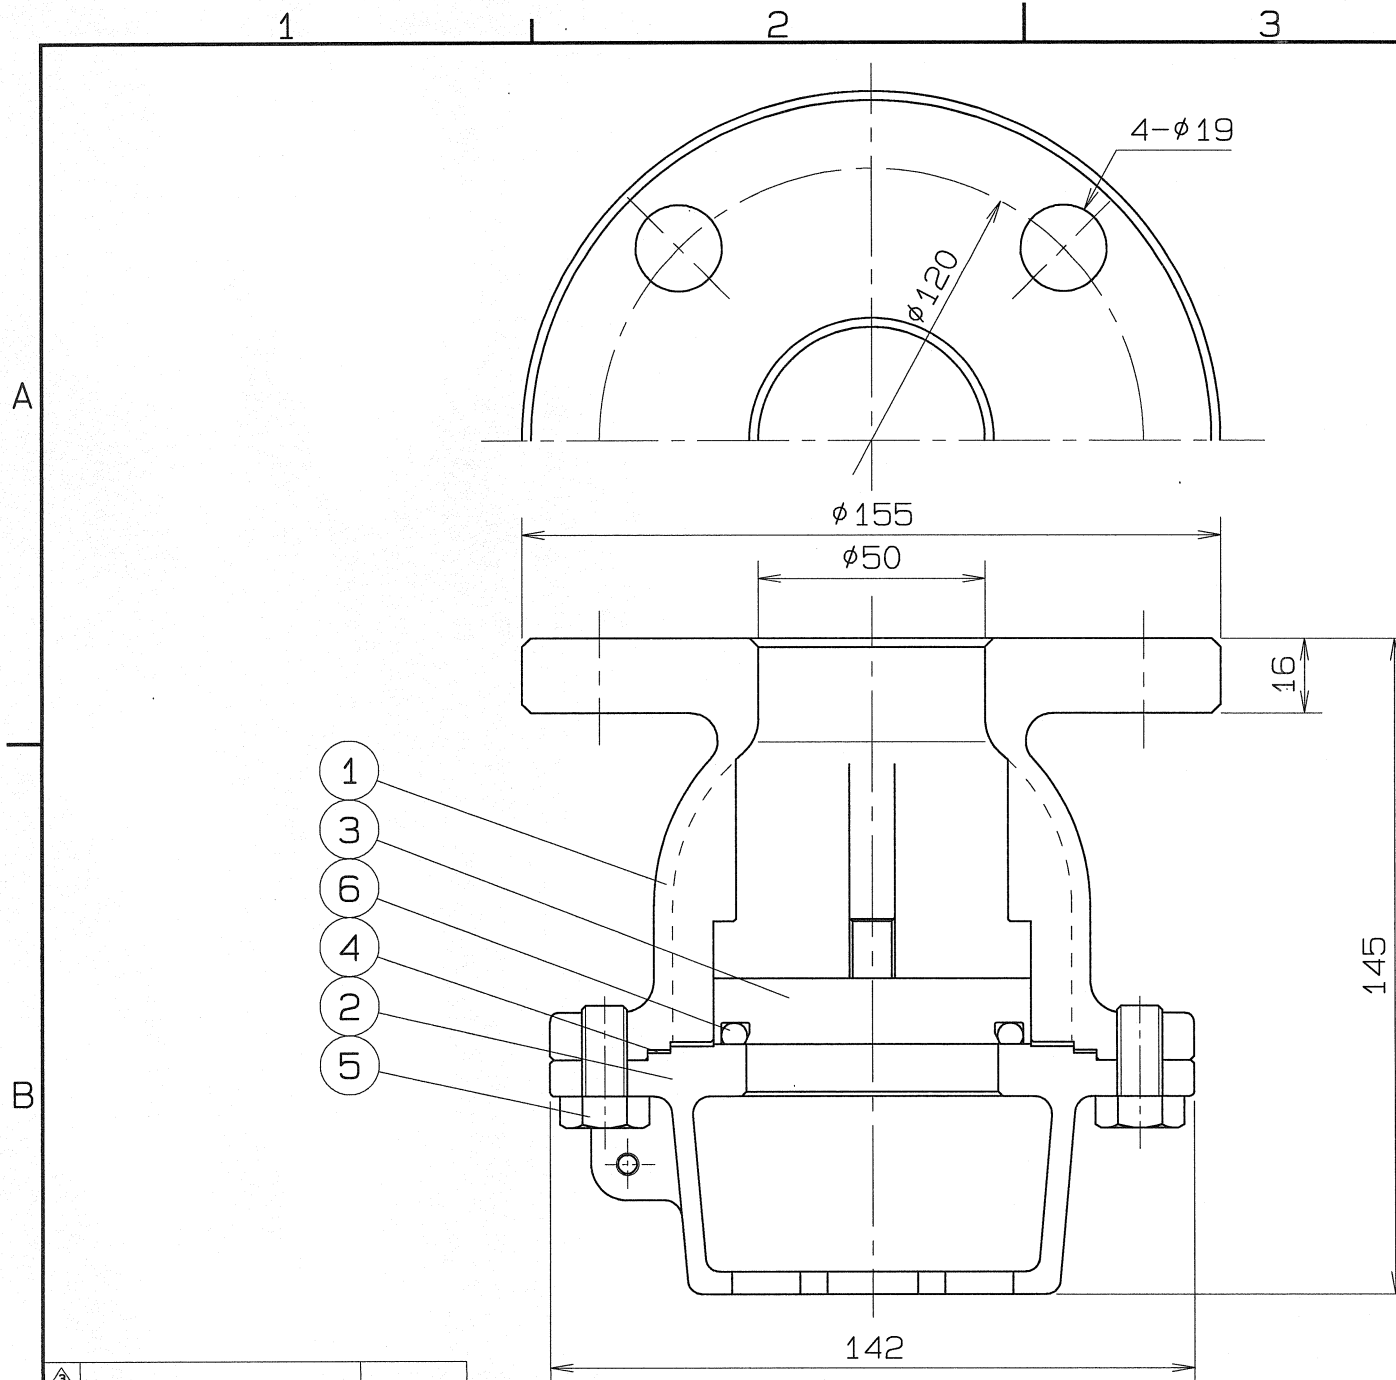


SPEC.		TEST PRESS.	
FLUID		SHELL	HYDRO 2.1 MPa (21.4 kgf/cm ²)
PRESS.	MPa (kgf/cm ²)	SEAT	AIR 0.6 MPa (6.1 kgf/cm ²)
TEMP.	°C		AIR MPa (kgf/cm ²)

END FLANGE: JIS B 2220

6	O RING	1	NBR	
5	HEXAGON BOLT	6	SUS 304	
4	GASKET PACKING	1	P.T.F.E	
3	DISC	1	SUS 304	
2	STRAINER	1	SCS 13A	
1	BODY	1	SCS 13A	
No.	NAME OF PARTS	Q.TY	MATERIALS	REMARKS
NAME JIS 10K FLANGED END FOOT VALVES				
TYPE	N-215	SIZE	50A	
DWG.No.	FAFS-0157	APPROVED BY	<i>K. Jureta</i>	
DATE	APR. 12. 2007	CHECKED BY	<i>G. B. K. K.</i>	
SCALE	:	DESIGNED BY	<i>R. Matsuk.</i>	
THIRD ANGLE PROJECTION METHOD			DRAWN BY	

O. N. INDUSTRIES LTD.

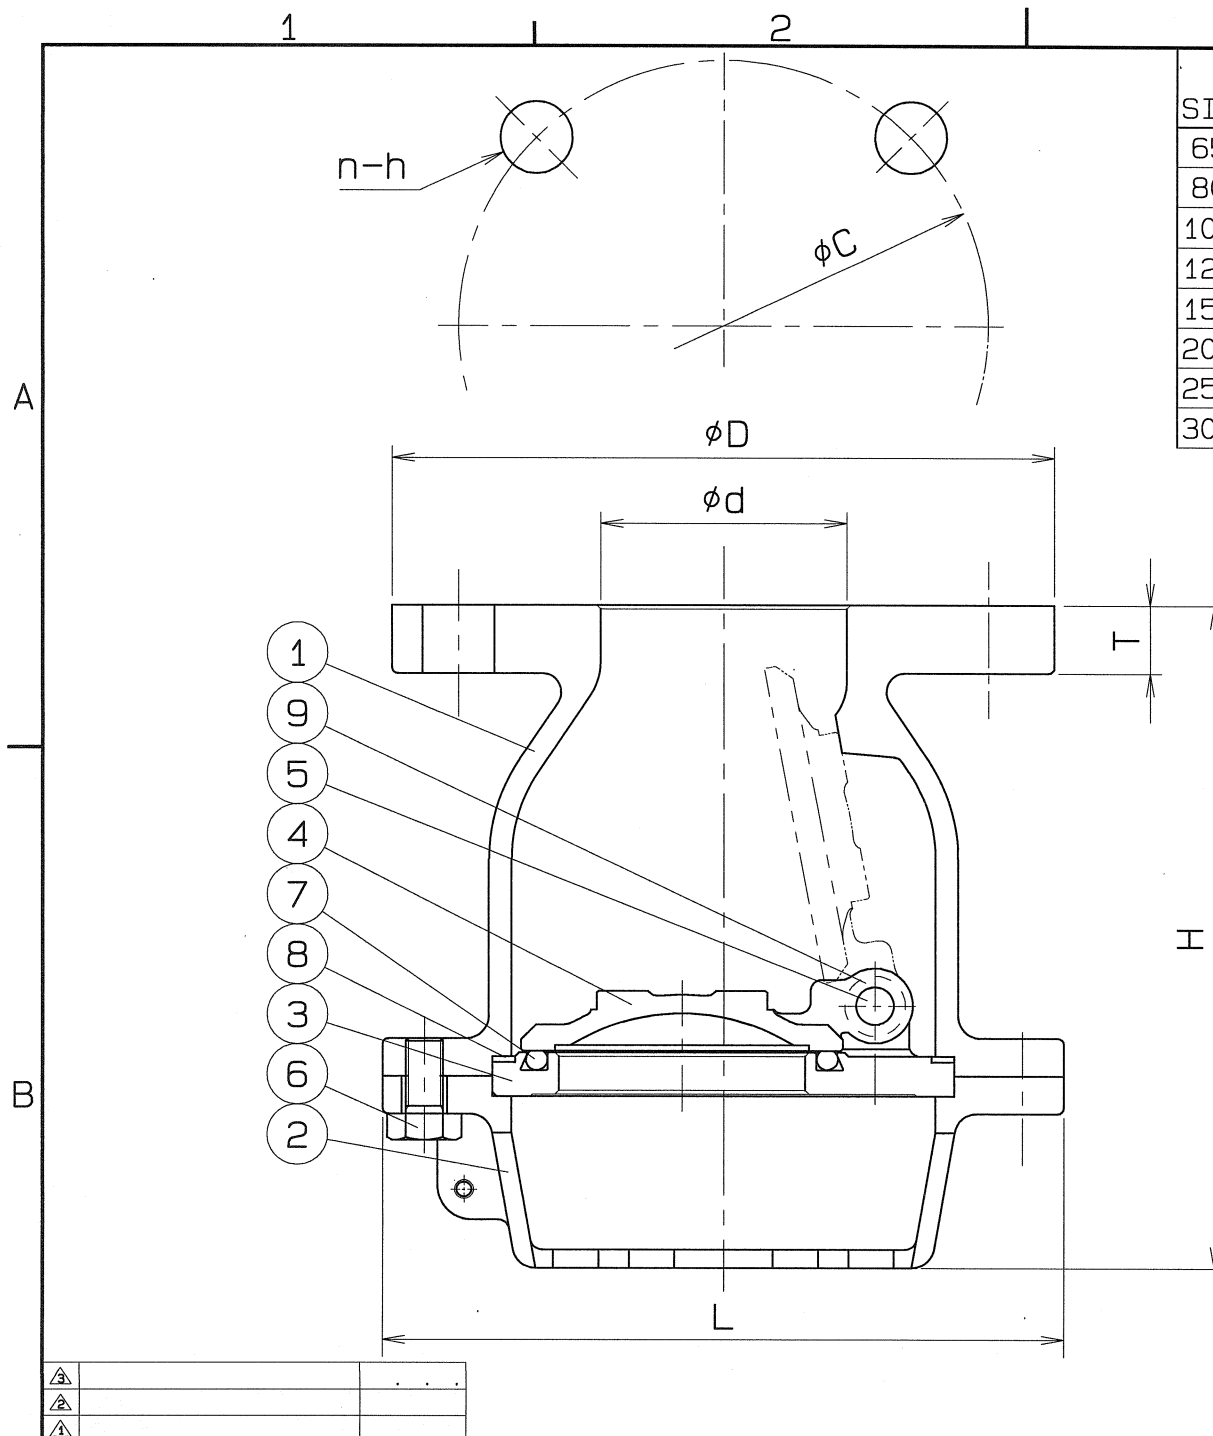

SIZE	d	D	T	BOLT HOLE			H	L	Q.TY
				C	n	h			
65A	65	175	18	140	4	19	176	180	
80A	80	185	18	150	8	19	198	217	
100A	100	210	18	175	8	19	240	244	
125A	125	250	20	210	8	23	275	291	
150A	150	280	22	240	8	23	334	340	
200A	200	330	22	290	12	23	445	415	
250A	250	400	24	355	12	25	520	470	
300A	300	445	24	400	16	25	611	556	

SPEC.		TEST PRESS.	
FLUID		SHELL 65~150A	2.1 MPa (21.4kgf/cm ²)
PRESS.	MPa (kgf/cm ²)	SHELL 200~300A	1.5 MPa (15.3kgf/cm ²)
TEMP.	℃	SEAT AIR	0.6 MPa (6.1 kgf/cm ²)

END FLANGE : JIS B 2220

No. 6 300A Q.TY: 14

No. 6 200A, 250A Q.TY: 12

No. 6 65A Q.TY: 6

9	BEARING	2	P.T.F.E	+SUS316
8	GASKET PACKING	1	P.T.F.E	
7	O RING	1	NBR	
6	HEXAGON BOLT	8	SUS 304	
5	PIN	1	SUS 304	
4	DISC	1	SCS 13A	
3	SEAT	1	SCS 13A	
2	STRAINER	1	SCS 13A	
1	BODY	1	SCS 13A	
No.	NAME OF PARTS	Q.TY	MATERIALS	REMARKS

NAME JIS 10K FLANGED END
FOOT VALVES

TYPE N-215 SIZE 65A~300A

DWG.No. FAFS-0158 ◇ APPROVED BY *K. Yamoto*

DATE APR. 12, 2007. CHECKED BY *Ch. K. K. K.*

SCALE : DESIGNED BY *K. Yamoto*

THIRD ANGLE PROJECTION METHOD DRAWN BY *K. Yamoto*

O. N. INDUSTRIES LTD.