
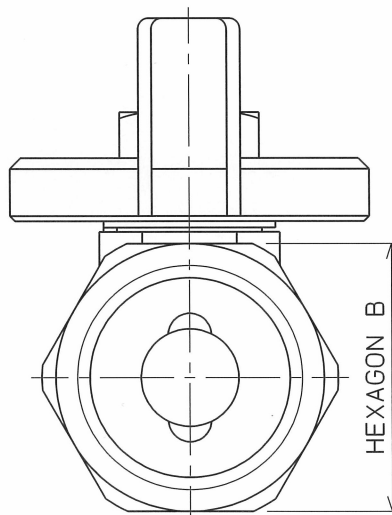
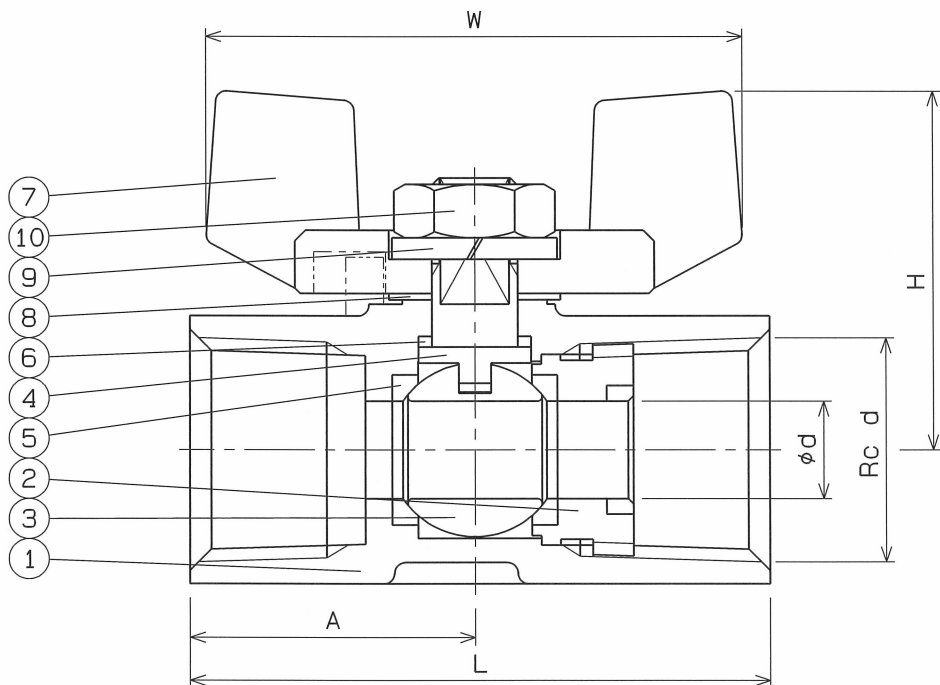


0090-SWAB BAMS-0600

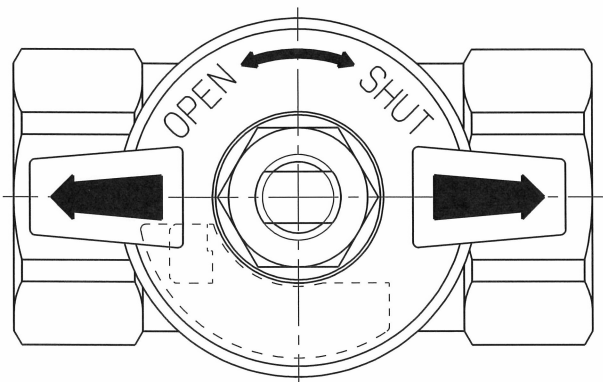

SIZE	d	L	PIPE THREADS		A	H	W	B	Q. TY
			D						
1/4	5	40	Rc	1/4	19	23	35	17	
3/8	7	42.5	Rc	3/8	21	27	40	20.5	
1/2	9	54	Rc	1/2	26.5	34	50	25	
3/4	12.5	58	Rc	3/4	29.5	37	50	30.5	

SPEC.		TEST PRESS.	
FLUID		SHELL	HYDRO 8.24 MPa
PRESS.	MPa	SEAT	AIR 0.6 MPa
TEMP.	°C	AIR	MPa

PIPE THREADS CONFORM WITH 'JIS B 0203'

10	HEXAGON NUT	1	SUS 304	
9	SPRING WASHER	1	SUS 304	
8	CONICAL WASHER	1	SUS 304	
7	HANDLE	1	PLASTIC	
6	THRUST PACKING	1	P.T.F.E.	Mo FILLED
5	BALL SEAT	2	P.T.F.E.	
4	STEM	1	SUS 316	
3	BALL DISC	1	SUS 316	
2	SEAT HOLDER	1	SUS 316	
1	BODY	1	SCS 14	
No.	NAME OF PARTS	Q. TY	MATERIALS	REMARKS

NAME	800 W.O.G. SCREWED ENDS BALL VALVES REDUCED BORE			
TYPE	N-600	SIZE	1/4 ~ 3/4 B	
DMG.No.	BAMS-0600	APPROVED BY	H. Ogawa	
DATE	MAY. 6. 1993.	CHECKED BY	H. Ogawa	
SCALE	:	DESIGNED BY	R. Matsuki	
THIRD ANGLE PROJECTION METHOD		DRAWN BY		

O. N. INDUSTRIES LTD.

△	形状変更、注記表記の変更	2022.1.26.
△	SI単位に変更	'99. 5.24.