



◇ 9600-MMVC ON:SMC

A
B
C
D
E
F

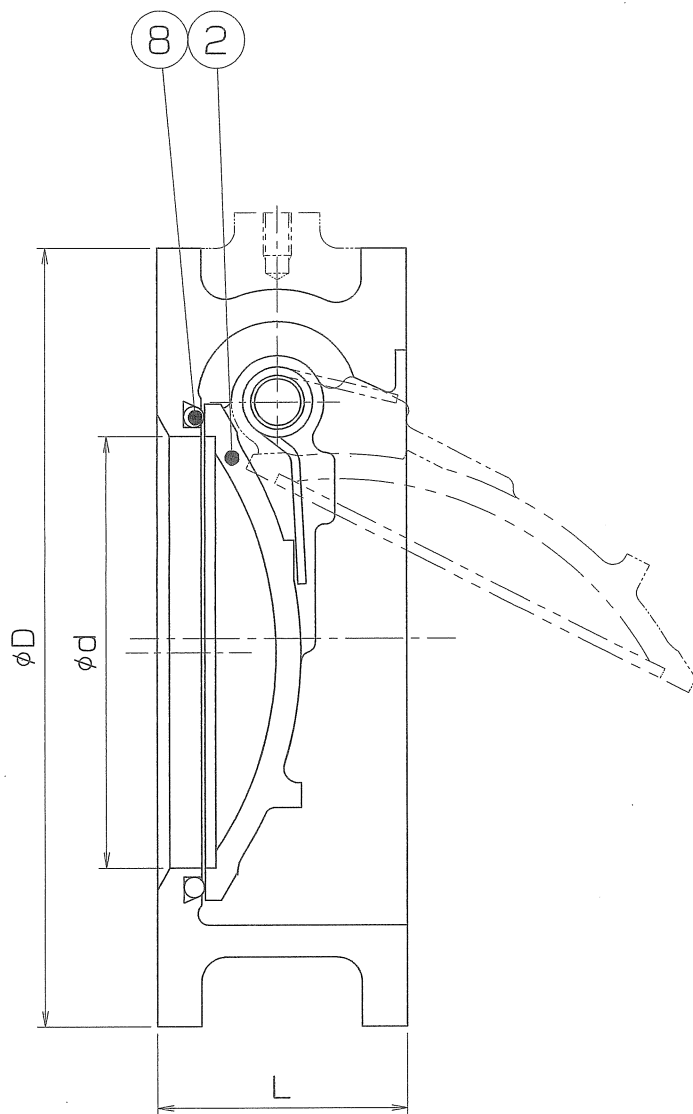

(LIFT LUG) M

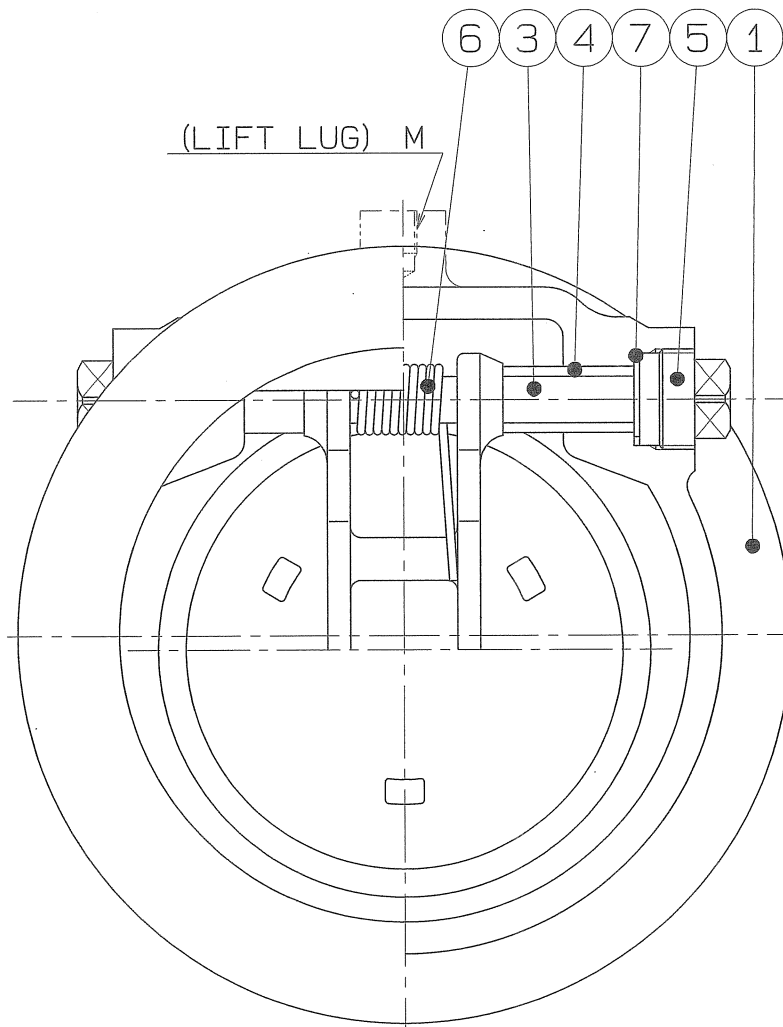

SIZE	d	L	D	M	Q.TY
80A	52	51	132	--	
100A	76	57	157	--	
125A	97	64	188	--	
150A	121	70	218	--	
200A	160	73	268	M10	
250A	194	79	331	M10	
300A	240	86	376	M12	

A
B
C
D
E
F


8	O RING	1	NBR	
7	GASKET PACKING	2	P.T.F.E	
6	SPRING	1	SUS316WPA	
5	SIDE PLUG	2	SUS316	
4	SPACER	2	SUS316	
3	HINGE PIN	1	SUS316	
2	DISC	1	SCS14A	
1	BODY	1	SCS14A	
No.	NAME OF PARTS	Q.TY	MATERIALS	REMARKS
NAME	JIS 10K WAFER CHECK VALVES			
TYPE	N-258	SIZE	80A~300A	
DWG.No.	CAWW-0096 ◇	APPROVED BY	K. Sumoto	
DATE	APR. 17. 2007	CHECKED BY	H. Adachi	
SCALE	:	DESIGNED BY	—	
THIRD ANGLE PROJECTION METHOD		DRAWN BY	H. Taketaka	
 O. N. INDUSTRIES LTD.				

SPEC.		TEST PRESS.	
FLUID		SHELL	HYDRO 2.1 MPa (21.4kgf/cm ²)
PRESS.	MPa (kgf/cm ²)	SEAT	AIR 0.6 MPa (6.1 kgf/cm ²)
TEMP.	℃	AIR	MPa (kgf/cm ²)

△		
△		
△		

◇ Z600-MMVJ ON SMD

SIZE	d	L	D	Q.TY
350A	270	185	421	
400A	310	191	484	
450A	356	204	539	
500A	387	220	594	

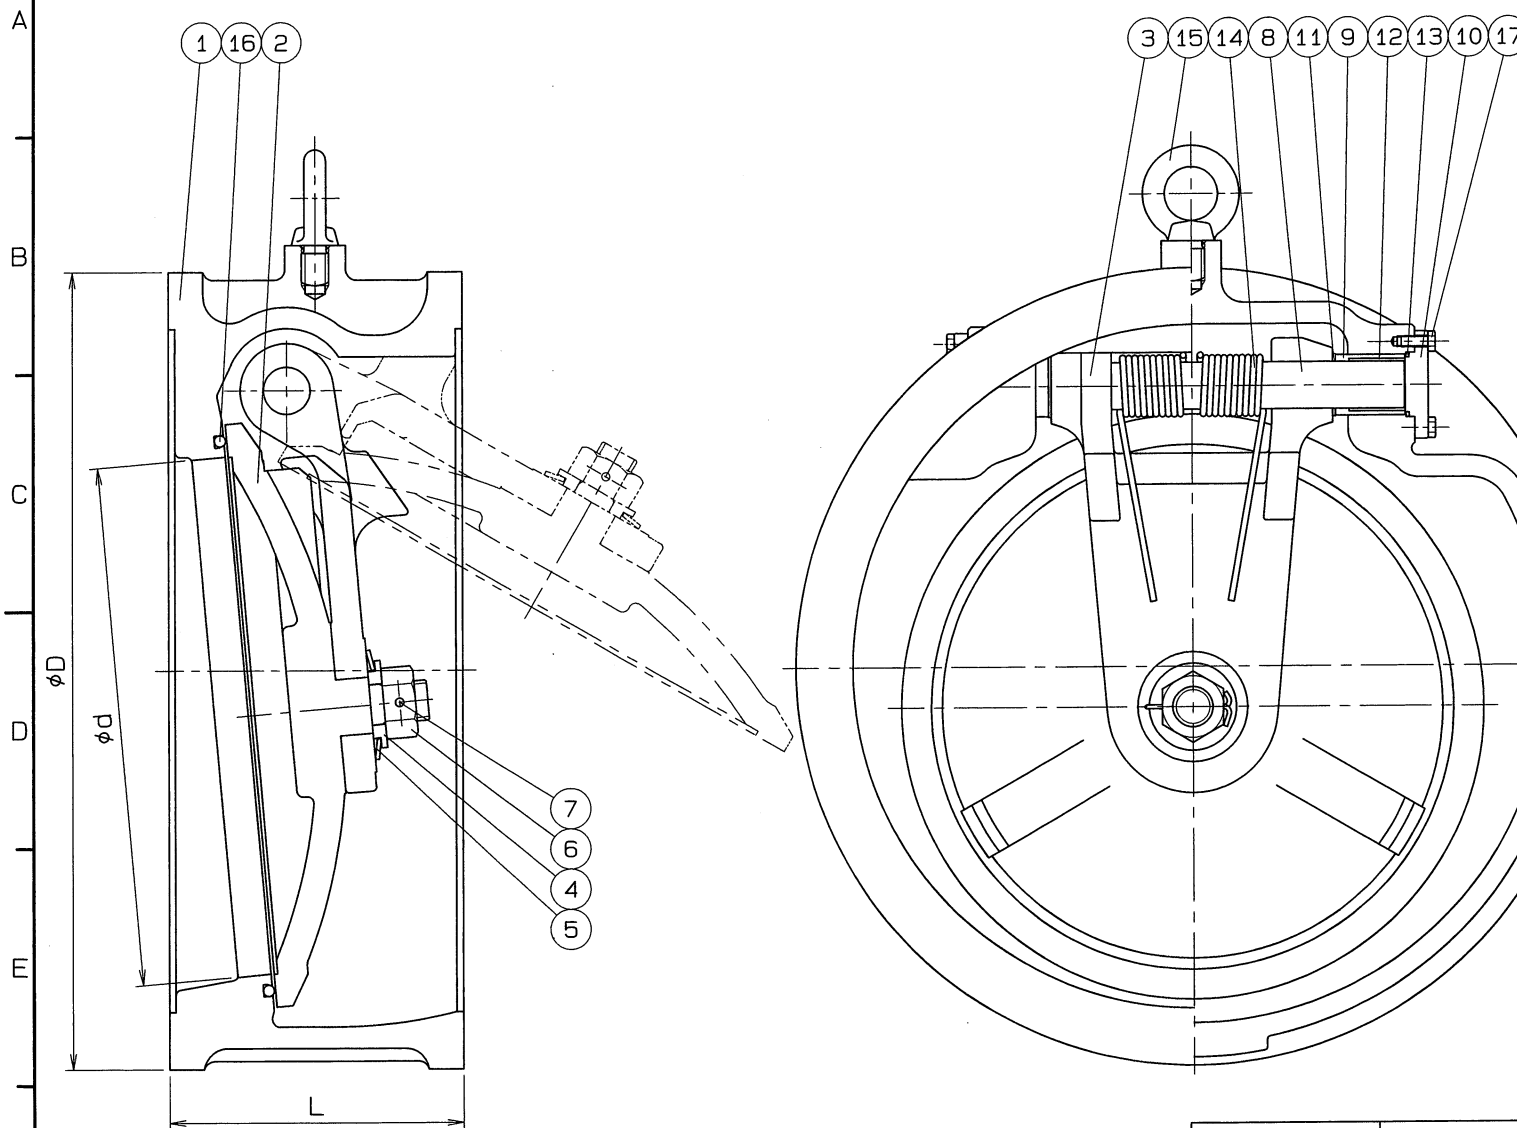

FACE TO FACE: API SPEC 6D

No.15 350A, 400A : M16 , 450A, 500A : M20

No.17 350 A Q'TY: 12

17	HEXAGON BOLT	8	SUS 304	
16	O RING	1	NBR	
15	EYE BOLT	1	S45C	
14	SPRING	2	SUS 316WPA	
13	GASKET PACKING	2	P.T.F.E.	
12	BEARING	2	P.T.F.E.	+SUS 316
11	BEARING	2	P.T.F.E.	+SUS 316
10	HINGE COVER	2	SUS 316	
9	SPACER	2	SUS 316	
8	HINGE PIN	1	SUS 316	
7	SPLIT PIN	1	SUS 316WS	
6	HEXAGON NUT	1	SUS 316	
5	CONICAL SPRING	1	SUS 316CSP	
4	PLAIN WASHER	1	SUS 316	
3	DISC ARM	1	SCS 14A	
2	DISC	1	SCS 14A	
1	BODY	1	SCS 14A	
No.	NAME OF PARTS	Q.TY	MATERIALS	REMARKS

JIS 10K WAFER CHECK VALVES			
NAME			
TYPE	N-258	SIZE	350 ~ 500 A
DWG.No.	CAWW-0097 ◇	APPROVED BY	<i>R. Matsuki</i>
DATE	APR. 17. 2007.	CHECKED BY	<i>R. Matsuki</i>
SCALE	:	DESIGNED BY	<i>R. Matsuki</i>
THIRD ANGLE PROJECTION METHOD		DRAWN BY	<i>R. Matsuki</i>

SPEC.		TEST PRESS.	
FLUID		SHELL	HYDRO 1.5 MPa
PRESS.	MPa	SEAT	AIR 0.6 MPa
TEMP.	℃		AIR MPa

△		
△		
△	アイボルト材質変更	H27. 5. 8.

O. N. INDUSTRIES LTD.