


NJSR

SIZE	d	P	L	L <sub>1</sub>	L <sub>2</sub>	H	W	D	Q, TY
20Sux3/4	Rc 3/4	20	88.5	47.5	41	94	80	47	

SPEC.		TEST PRESS.	
FLUID		SHELL	HYDRO 3.5 MPa
PRESS.	MAX 2.0 MPa	SEAT	AIR 0.6 MPa
TEMP.	MAX 100 °C	AIR	MPa

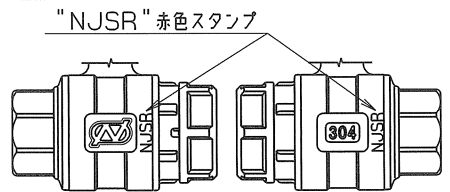

PIPE THREADS CONFORM WITH "JIS B 0203"  
\*MODIFIED P.T.F.E.

No.	NAME OF PARTS	Q.TY	MATERIALS	REMARKS
18	O RING	1	FKM	
17	LOOSE STOPPER	1	SUS 304CSP	
16	RUBBER PACKIG	1	SYNTHETIC RUBBER (NJSR)	
15	RATCHET NUT	1	SCS 13	
14	HEXAGON NUT	1	SUS 304	
13	SPRING WASHER	1	SUS 304	
12	HANDLE	1	SUS 304	
11	GLAND PACKING	1	P.T.F.E.	
10	BEARING	1	P.T.F.E.	CARBON FILLED
9	GASKET PACKING	2	P.T.F.E.	
8	BALL SEAT	2	P.T.F.E.	*
7	WASHER	1	SUS 304CSP	
6	GLAND BUSHING	1	SCS 13	
5	STEM	1	SUS 304	
4	BALL DISC	1	SCS 13A	
3	BODY CAP (B)	1	SCS 13	Rc "d"
2	BODY CAP (A)	1	SCS 13	
1	BODY	1	SCS 13	

NAME	NICE JOINT AND SCREWED ENDS FULL BORE LONG NECK TYPE MINI BALL VALVES		
TYPE	NJX-222NF	SIZE	20Sux3/4
DWG.No.	XBAMS-0029◇	DATE	NOV. 6. 2023

APPROVED	DESIGNED	CHECKED	DRAWN

THIRD ANGLE PROJECTION METHOD SCALE :  
**O. N. INDUSTRIES LTD.**