


◇ Z200-0027 XBAMS-0027

NJSR

SIZE	P	L ₁	L ₂	H	W	D	Q, TY
13 Su	15	83	75	87	60	38	
20 Su	20	95	85	94	80	46.5	

SPEC.			TEST PRESS.		
FLUID			SHELL	HYDRO	3.5 MPa
PRESS.	MAX	MPa	SEAT	AIR	0.6 MPa
TEMP.	MAX	℃		AIR	MPa

"NJSR" 赤色スタンプ

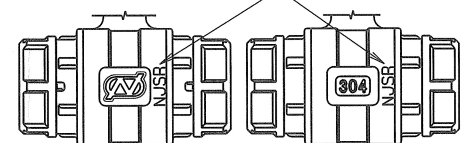


外観図


*MODIFIED P.T.F.E.

17	O RING	1	FKM	
16	LOOSE STOPPER	2	SUS 304CSP	
15	RUBBER PACKING	2	SYNTHETIC RUBBER (NJSR)	
14	RATCHET NUT	2	SCS 13	
13	HEXAGON NUT	1	SUS 304	
12	SPRING WASHER	1	SUS 304	
11	HANDLE	1	SUS 304	
10	GLAND PACKING	1	P.T.F.E.	
9	BEARING	1	P.T.F.E.	CARBON FILLED
8	GASKET PACKING	2	P.T.F.E.	
7	BALL SEAT	2	P.T.F.E.	*
6	WASHER	1	SUS 304CSP	
5	GLAND BUSHING	1	SCS 13	
4	STEM	1	SUS 304	
3	BALL DISC	1	SCS 13A	
2	BODY CAP	2	SCS 13	
1	BODY	1	SCS 13	




No.	NAME OF PARTS	Q. TY	MATERIALS	REMARKS
NAME NICE JOINT ENDS FULL BORE LONG NECK TYPE BALL VALVES				
TYPE	NJX-220	SIZE	13, 20Su	
DWG.No.	XBAMS-0027◇	DATE	NOV. 6. 2023.	
THIRD ANGLE PROJECTION METHOD		SCALE	:	
APPROVED	CHECKED	DESIGNED	DRAWN	



O. N. INDUSTRIES LTD.



A部詳細図

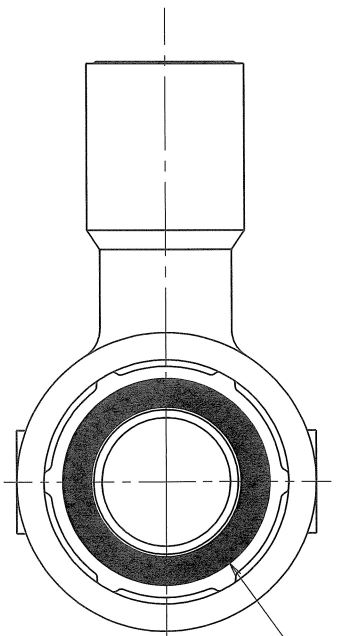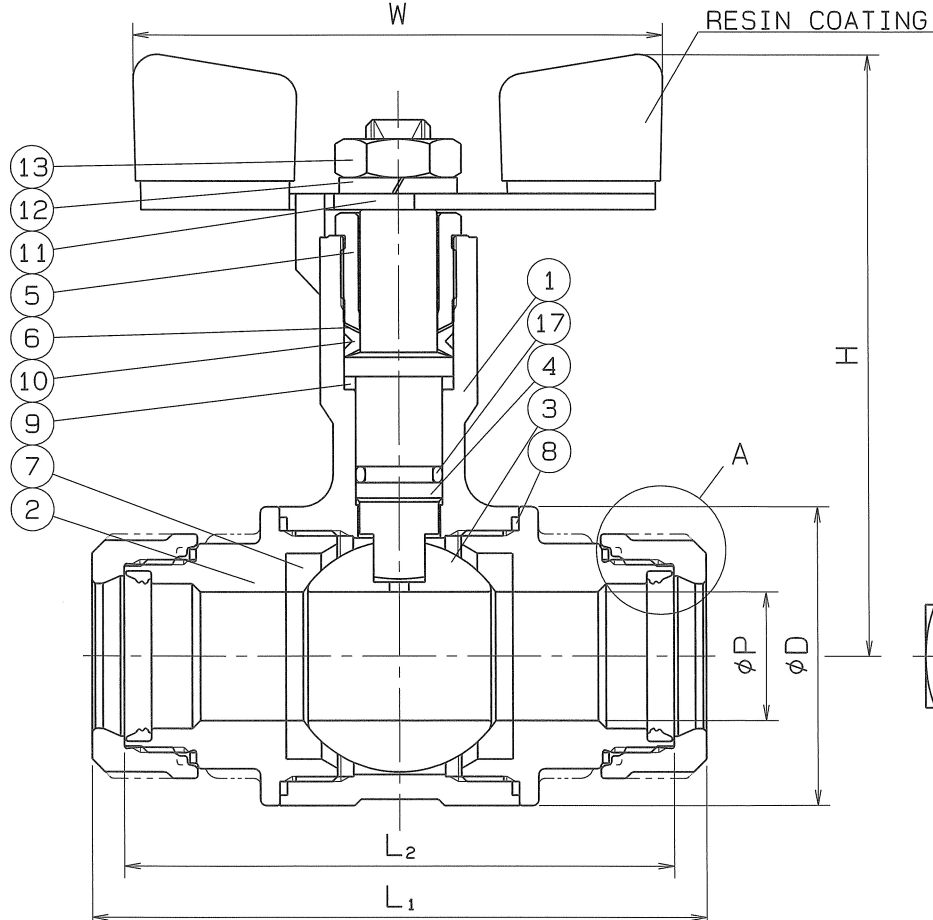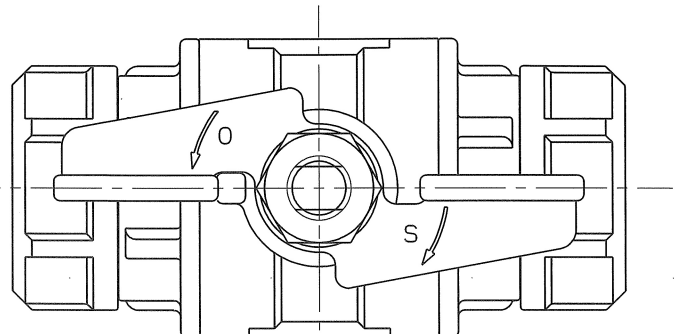

ナット端面赤色スタンプ
※反対側のナットも同様