


◇ 7200-0024 XBAMS-0024

NJSR

SIZE	P	L <sub>1</sub>	L <sub>2</sub>	H <sub>1</sub>	H <sub>2</sub>	W	D	Q, TY
13 Su	15	83	75	91	45	100	38	
20 Su	20	95	85	101	46	130	46.5	
25 Su	25	99	87	104	46	130	54	

SPEC.			TEST PRESS.		
FLUID			SHELL	HYDRO	3.5 MPa
PRESS.	MAX	MPa	SEAT	AIR	0.6 MPa
TEMP.	MAX	℃		AIR	MPa

"NJSR" 赤色スタンプ

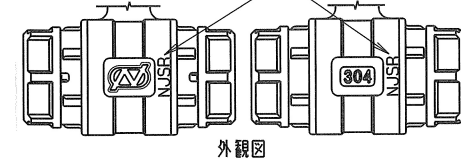

外観図


\*MODIFIED P.T.F.E.

17	O RING	1	FKM	
16	LOOSE STOPPER	2	SUS 304CSP	
15	RUBBER PACKING	2	SYNTHETIC RUBBER (NJSR)	
14	RATCHET NUT	2	SCS 13	
13	HEXAGON NUT	1	SUS 304	
12	SPRING WASHER	1	SUS 304	
11	HANDLE	1	SUS 304	
10	GLAND PACKING	1	P.T.F.E.	
9	BEARING	1	P.T.F.E.	CARBON FILLED
8	GASKET PACKING	2	P.T.F.E.	
7	BALL SEAT	2	P.T.F.E.	*
6	WASHER	1	SUS 304CSP	
5	GLAND BUSHING	1	SCS 13	
4	STEM	1	SUS 304	
3	BALL DISC	1	SCS 13A	
2	BODY CAP	2	SCS 13	
1	BODY	1	SCS 13	


No.	NAME OF PARTS	Q. TY	MATERIALS	REMARKS
NICE JOINT ENDS FULL BORE LONG NECK TYPE BALL VALVES				
TYPE	NJX-220	SIZE	13~25Su	
DMG.No.	XBAMS-0024◇	DATE	NOV. 6.2023	
THIRD ANGLE PROJECTION METHOD		SCALE		

APPROVED	CHECKED	DESIGNED	DRAWN
小島	小島	山島	馬場


O. N. INDUSTRIES LTD.



A部詳細図

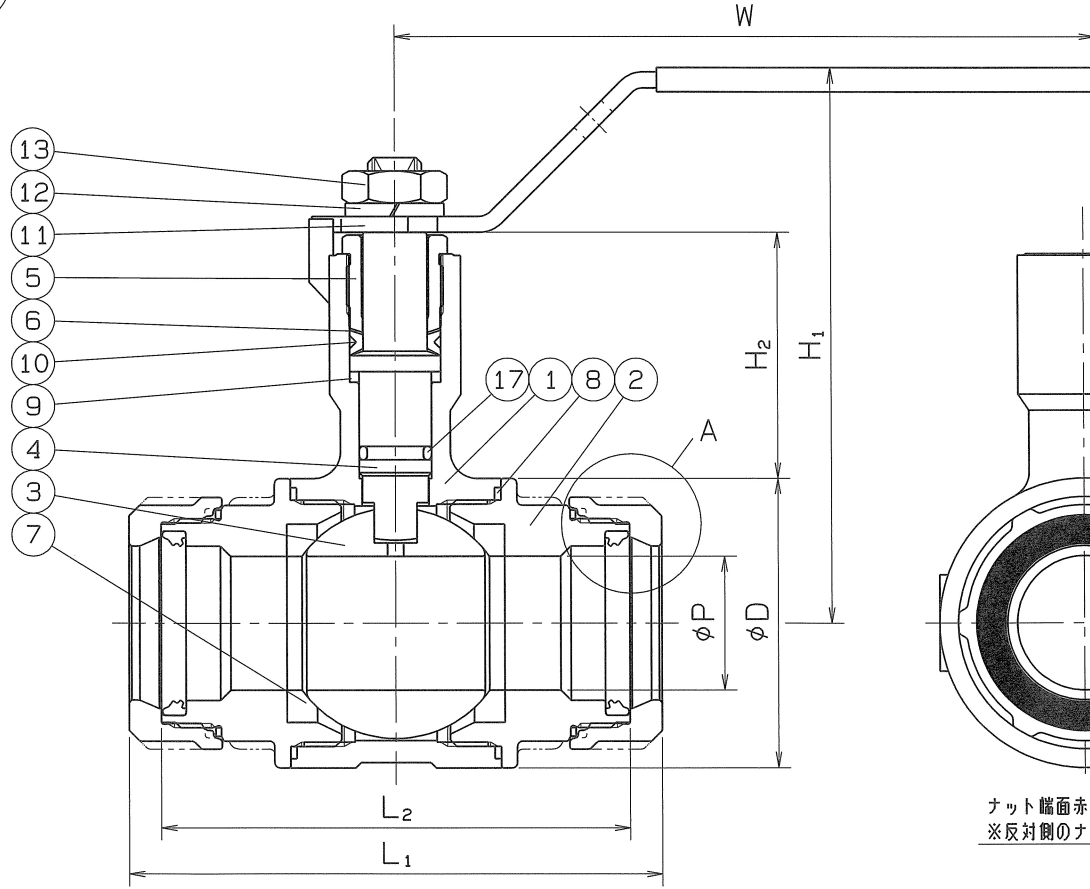

RESIN COATING

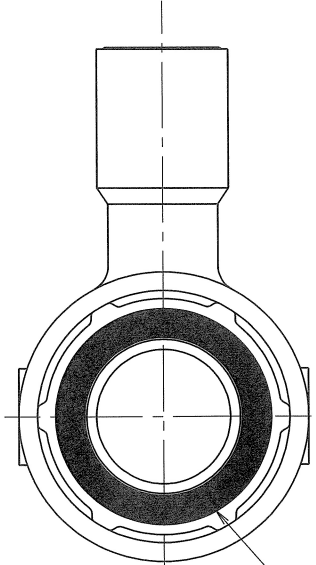

ナット端面赤色スタンプ  
※反対側のナットも同様

△		
△		
△		


◇ G200-SWVBX 'ON 9MO

NJSR

SIZE	P	L <sub>1</sub>	L <sub>2</sub>	H <sub>1</sub>	H <sub>2</sub>	W	D	Q, TY
30 Su	32	114	100	119	44	170	67	
40 Su	40	125	107	125	43	170	80	

SPEC.			TEST PRESS.		
FLUID			SHELL	HYDRO	3.5 MPa
PRESS.	MAX	MPa	SEAT	AIR	0.6 MPa
TEMP.	MAX	℃		AIR	MPa

"NJSR" 赤色スタンプ

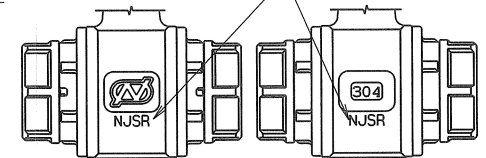

外観図

\*MODIFIED P.T.F.E.

17	O RING	1	FKM	
16	LOOSE STOPPER	2	SUS 304CSP	
15	RUBBER PACKING	2	SYNTHETIC RUBBER (NJSR)	
14	RATCHET NUT	2	SCS 13	
13	HEXAGON NUT	1	SUS 304	
12	SPRING WASHER	1	SUS 304	
11	HANDLE	1	SUS 304	
10	GLAND PACKING	1	P.T.F.E.	
9	BEARING	1	P.T.F.E.	CARBON FILLED
8	GASKET PACKING	2	P.T.F.E.	
7	BALL SEAT	2	P.T.F.E.	*
6	WASHER	1	SUS 304CSP	
5	GLAND BUSHING	1	SUS 304	
4	STEM	1	SUS 304	
3	BALL DISC	1	SCS 13A	
2	BODY CAP	2	SCS 13	
1	BODY	1	SCS 13	

No. NAME OF PARTS Q.TY MATERIALS REMARKS

NAME NICE JOINT ENDS FULL BORE  
LONG NECK TYPE BALL VALVES

TYPE NJX-220 SIZE 30, 40Su

DWG.No. XBAMS-0025◇ DATE NOV. 6.2023

THIRD ANGLE PROJECTION METHOD SCALE :

APPROVED CHECKED DESIGNED DRAWN



O. N. INDUSTRIES LTD.

RESIN COATING

W

H<sub>2</sub>H<sub>1</sub>

A

øP

øD

L<sub>2</sub>L<sub>1</sub>ナット端面赤色スタンプ  
※反対側のナットも同様

A部詳細図

16  
15  
1413  
12  
11  
5  
6  
10  
9  
2  
7  
817  
1  
4  
3

◇ 9200-SW4X XBAMS-0026 DWG No.

NJSR

Q.TY :

SPEC.			TEST PRESS.	
FLUID			SHELL	HYDRO 3.5 MPa
PRESS.	MAX	MPa	SEAT	AIR 0.6 MPa
TEMP.	MAX	℃	AIR	MPa

"NJSR" 赤色スタンプ



外観図


\*MODIFIED P.T.F.E.

18	LOOSE STOPPER	2	SUS 304CSP	
17	RUBBER PACKING	2	SYNTHETIC RUBBER (NJSR)	
16	RATCHET NUT	2	SCS 13	
15	GLAND BOLT	2	SUS 304	
14	HANDLE	1	SCS 13	
13	STOP RING	1	SUS 304	
12	STOPPER	1	SUS 304	
11	STEM BEARING	1	P.T.F.E.	GLASS FILLED
10	GLAND PACKING	1set	P.T.F.E.	
9	GASKET PACKING	2	P.T.F.E.	
8	BALL SEAT	2	P.T.F.E.	*
7	O RING	2	FKM	P18
6	GLAND	1	SCS 13	
5	THRUST RING	1	SUS 329J1	
4	STEM	1	SUS 304	
3	BALL DISC	1	SCS 13A	
2	BODY CAP	2	SCS 13	
1	BODY	1	SCS 13	



No.	NAME OF PARTS	Q.TY	MATERIALS	REMARKS
NAME	NICE JOINT ENDS LONG NECK TYPE BALL VALVE			
TYPE	NJX-220	SIZE	50Su	
DWG.No.	XBAMS-0026◇	DATE	NOV. 6.2023.	
THIRD ANGLE PROJECTION METHOD		SCALE		

APPROVED	CHECKED	DESIGNED	DRAWN

O. N. INDUSTRIES LTD.



A部詳細図

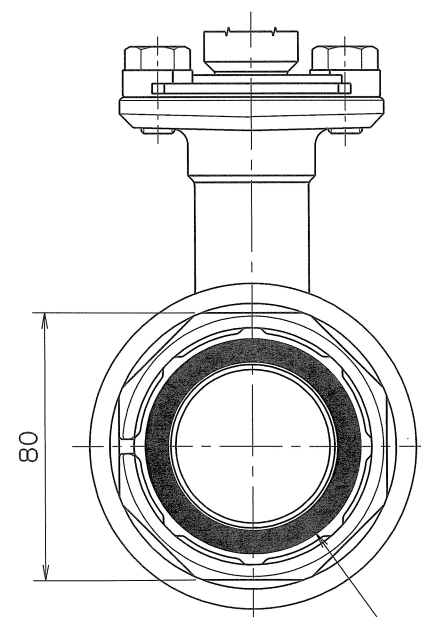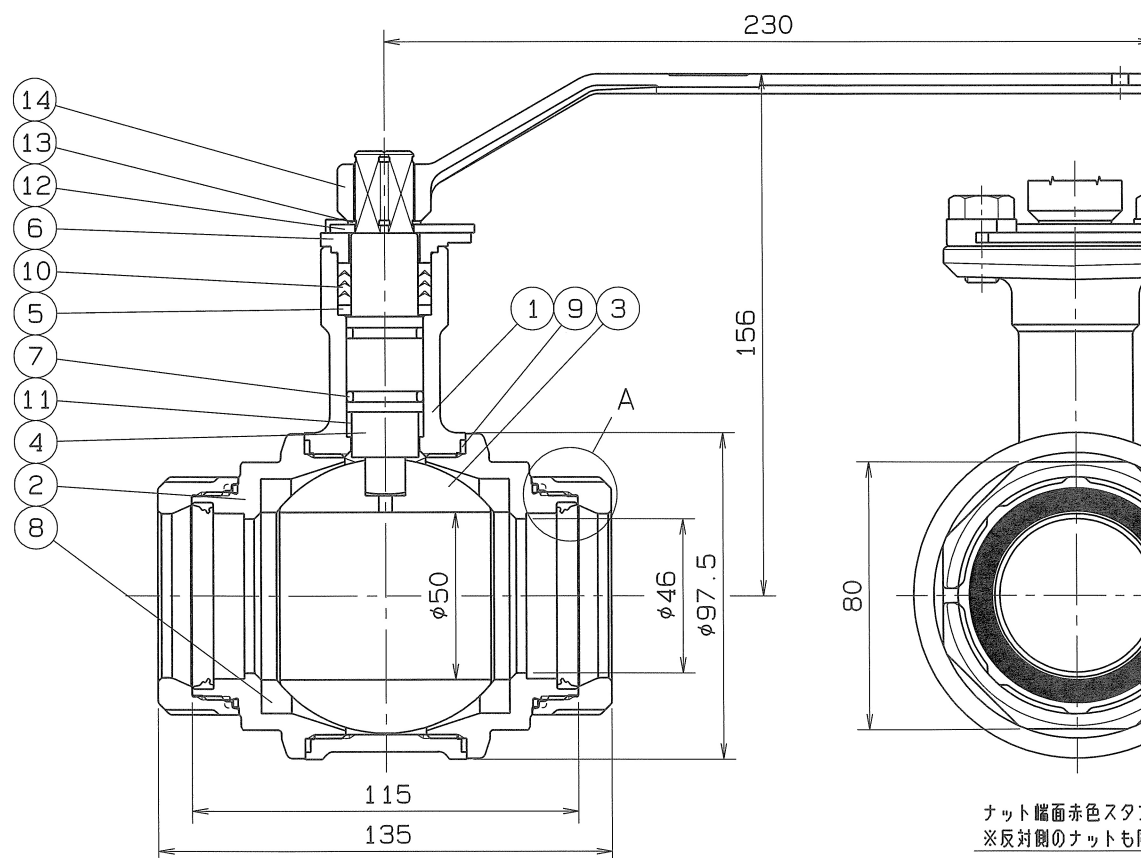ナット端面赤色スタンプ  
※反対側のナットも同様

△		
△		
△		