
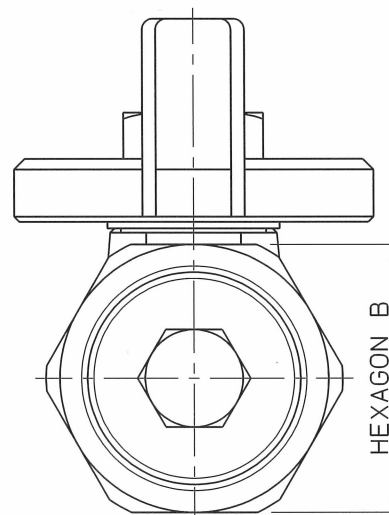
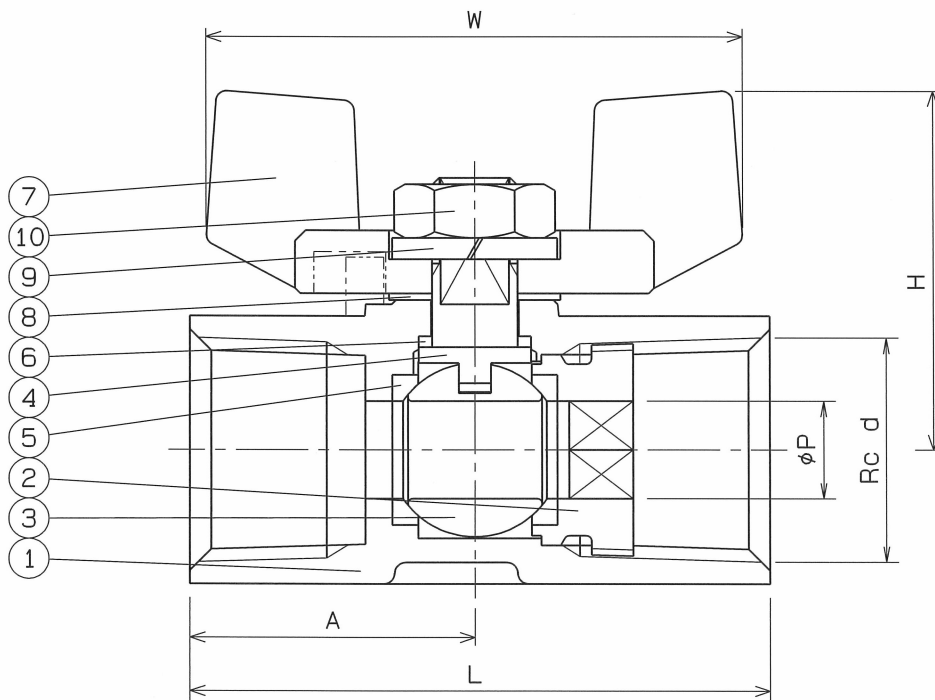


0950-SWAB BAMS-0950

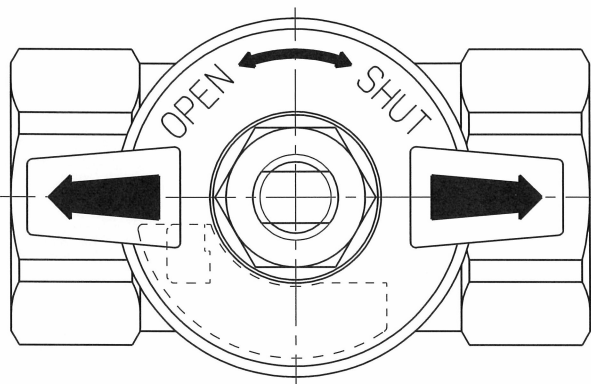

SIZE	PIPE THREADS	P	L	A	H	W	B	Q, TY
	d							
1/4	Rc 1/4	5	40	19	23	35	17	
3/8	Rc 3/8	7	42.5	21	27	40	20.5	
1/2	Rc 1/2	9	54	26.5	34	50	25	
3/4	Rc 3/4	12.5	58	29.5	37	50	30.5	

SPEC.		TEST PRESS.	
FLUID		SHELL	HYDRO 8.24 MPa
PRESS.	MPa	SEAT	AIR 0.6 MPa
TEMP.	℃	AIR	MPa

PIPE THREADS CONFORM WITH "JIS B 0203"

10	HEXAGON NUT	1	SUS 304	
9	SPRING WASHER	1	SUS 304	
8	CONICAL WASHER	1	SUS 304	
7	HANDLE	1	PLASTIC	
6	THRUST PACKING	1	P.T.F.E.	Mo FILLED
5	BALL SEAT	2	P.T.F.E.	
4	STEM	1	SUS 304	
3	BALL DISC	1	SUS 304	
2	SEAT HOLDER	1	SCS 13	
1	BODY	1	SCS 13	
No.	NAME OF PARTS	Q.TY	MATERIALS	REMARKS
NAME	800 W.O.G. SCREWED ENDS BALL VALVES REDUCED BORE			
TYPE	N-600A	SIZE	1/4 ~ 3/4 B	
DMG.No.	BAMS-0950	APPROVED BY	H. Ogawa	
DATE	APR. 8.2008	CHECKED BY	H. Ogawa	
SCALE	:	DESIGNED BY	R. Matsuki	
THIRD ANGLE PROJECTION METHOD		DRAWN BY		

形状変更、注記表記の変更	2022.1.26.
寸法表のスケール変更	H20.9.18.
寸法記号訂正	H20.7.25.

O. N. INDUSTRIES LTD.