



9260-0926 DMC No. BAMS-0926

SIZE	PIPE THREADS d	P	L	H	W	D	Q. TY
3/8	Rc 3/8	8	55	49	100	27	
1/2	Rc 1/2	10	60	50	100	30	
3/4	Rc 3/4	15	70	54	100	38	
1	Rc 1	20	80	64	130	46.5	
1 1/4	Rc 1 1/4	25	90	68	130	54	

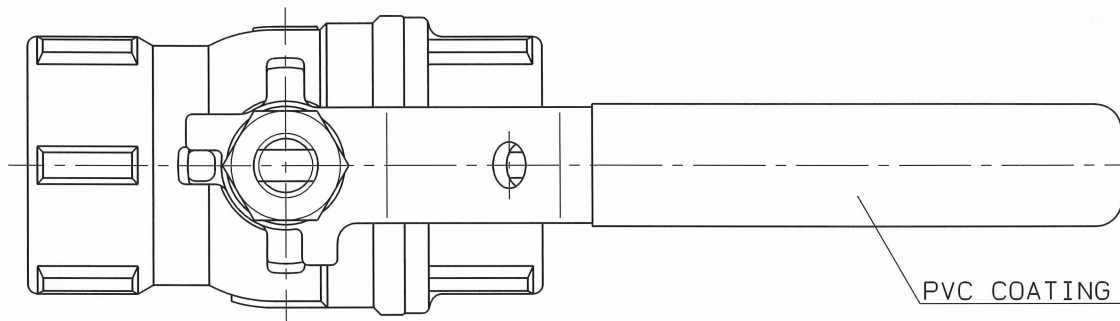

SPEC.		TEST PRESS.	
FLUID		SHELL	HYDRO 8.24 MPa
PRESS.	MPa	SEAT	AIR 0.6 MPa
TEMP.	℃	AIR	MPa

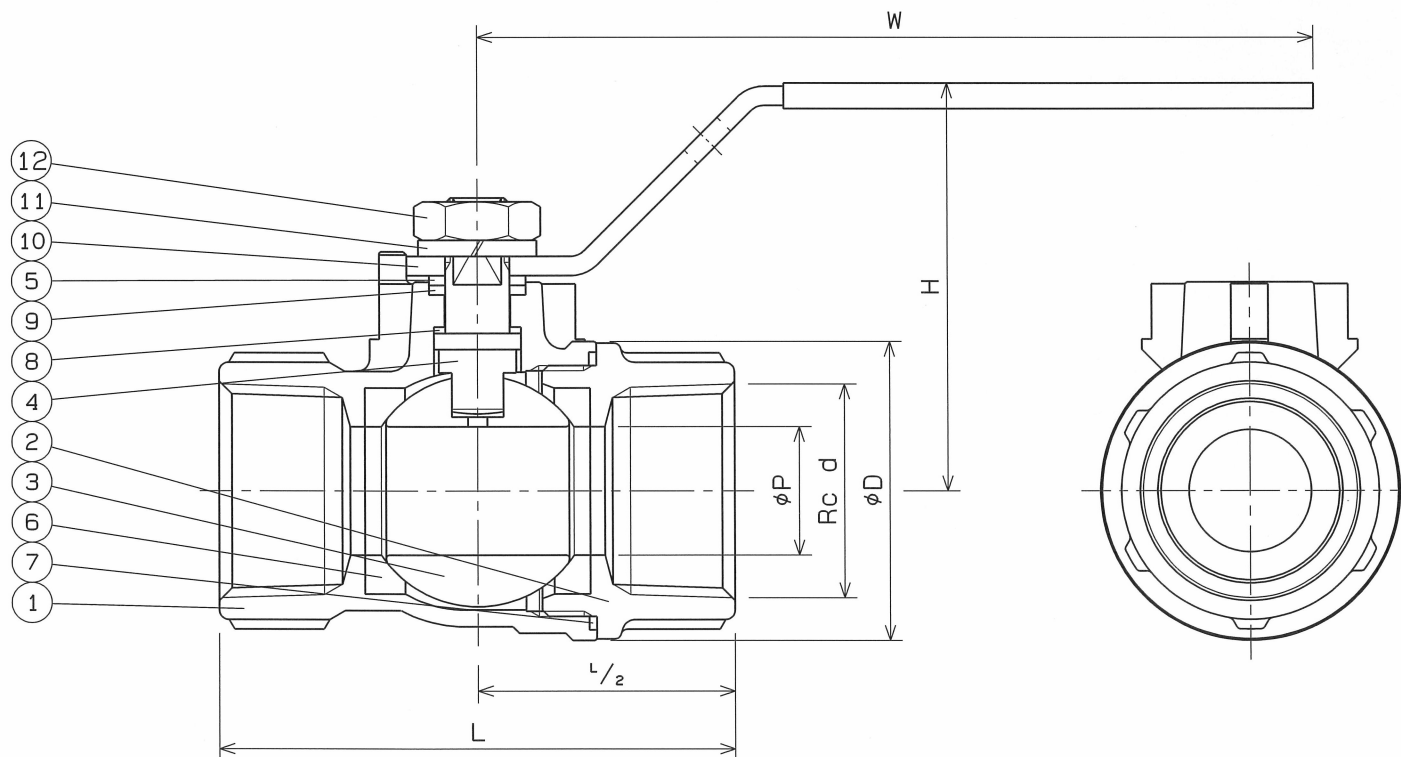

PIPE THREADS CONFORM WITH "JIS B 0203"

No. 3 3/8, 1/2 B MATERIAL: SUS 304

12	HEXAGON NUT	1	SUS 304	
11	SPRING WASHER	1	SUS 304	
10	HANDLE	1	SUS 304	
9	THRUST BEARING	1	P.T.F.E.	CARBON FILLED
8	THRUST PACKING	1	P.T.F.E.	CARBON FILLED
7	GASKET PACKING	1	P.T.F.E.	
6	BALL SEAT	2	P.T.F.E.	
5	GLAND	1	SUS 304	
4	STEM	1	SUS 304	
3	BALL DISC	1	SCS 13A	
2	BODY CAP	1	SCS 13	
1	BODY	1	SCS 13	


No.	NAME OF PARTS	Q. TY	MATERIALS	REMARKS
NAME 800 W.O.G. SCREWED ENDS BALL VALVES REDUCED BORE				
TYPE N-610		SIZE 3/8 ~ 1 1/4 B		
DMC No. BAMS-0926		APPROVED BY H. Ogura		
DATE APR. 12. 2007		CHECKED BY H. Ogura		
SCALE :		DESIGNED BY R. Matsuki		
THIRD ANGLE PROJECTION METHOD		DRAWN BY		

O. N. INDUSTRIES LTD.

△		
△		
△	材質変更	2021. 2. 1



◇ Z260-SWAB BAMS-0927

SIZE	PIPE THREADS	P	L	H	W	D	Q, TY
	d						
1 1/2	Rc 1 1/2	32	100	96	170	67	
2	Rc 2	40	120	102	170	80	

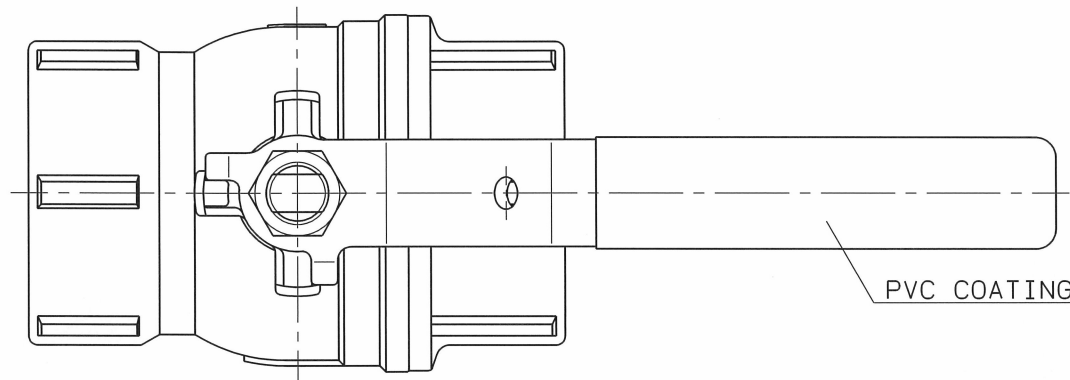

PVC COATING

SPEC.		TEST PRESS.	
FLUID		SHELL	HYDRO 8.24 MPa
PRESS.	MPa	SEAT	AIR 0.6 MPa
TEMP.	℃	AIR	MPa

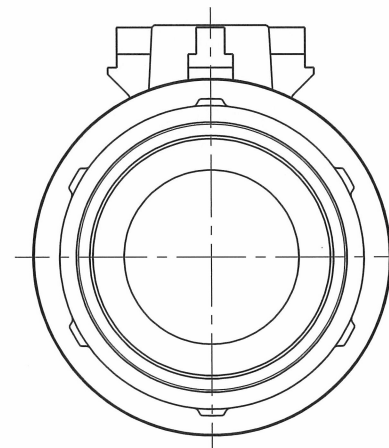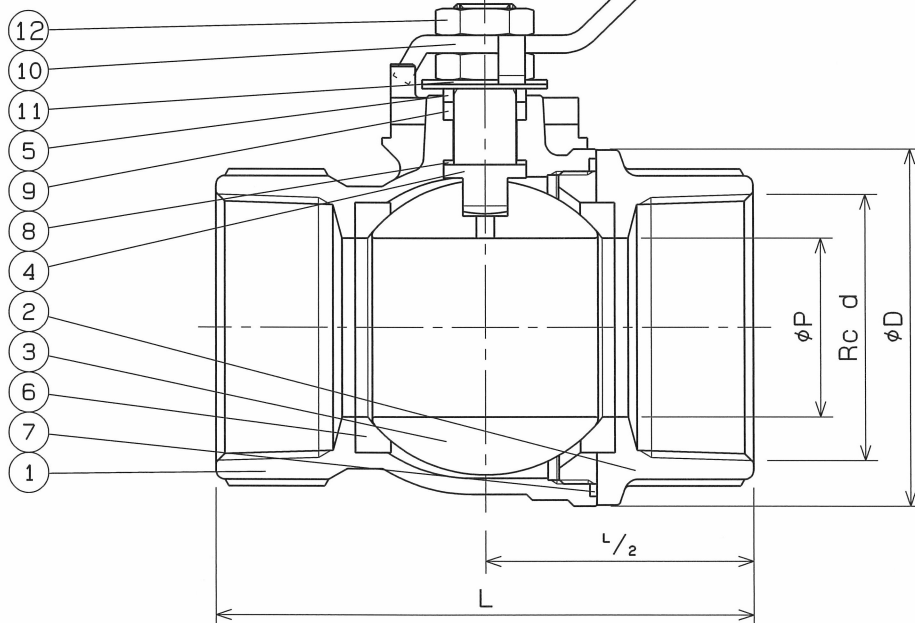

PIPE THREADS CONFORM WITH "JIS B 0203"

12	HEXAGON NUT	2	SUS 304	
11	CONICAL WASHER	2	SUS 304	
10	HANDLE	1	SUS 304	
9	GLAND PACKING	1	P.T.F.E.	
8	THRUST PACKING	1	P.T.F.E.	CARBON FILLED
7	GASKET PACKING	1	P.T.F.E.	
6	BALL SEAT	2	P.T.F.E.	
5	GLAND	1	SUS 304	
4	STEM	1	SUS 304	
3	BALL DISC	1	SCS 13A	
2	BODY CAP	1	SCS 13	
1	BODY	1	SCS 13	

△
△




No.	NAME OF PARTS	Q.TY	MATERIALS	REMARKS
NAME 800 W.O.G. SCREWED ENDS BALL VALVES REDUCED BORE				
TYPE N-610		SIZE	1 1/2, 2 B	
DWG.No.	BAMS-0927 ◇	APPROVED BY	H. Ogura	
DATE	APR. 12. 2007	CHECKED BY	H. Ogura	
SCALE	:	DESIGNED BY	R. Matsuki	
THIRD ANGLE PROJECTION METHOD		DRAWN BY		

O. N. INDUSTRIES LTD.

△		
△		
△	材質変更	2021. 2. 1

◇ SI60-SWAB BAMS-0915

SIZE	PIPE THREADS	P	L	H	W	D	S	F	Q, TY
	d								
2 1/2	Rc 2 1/2	50	145	131	230	98	85	5.1	
3	Rc 3	65	170	141	230	119	99	5.1	

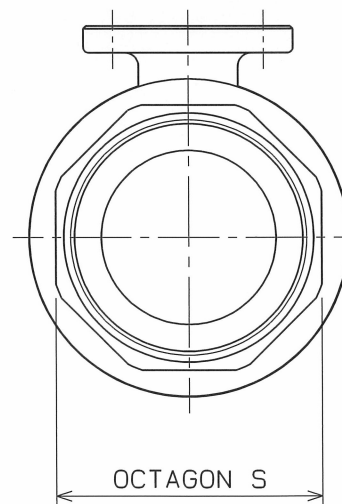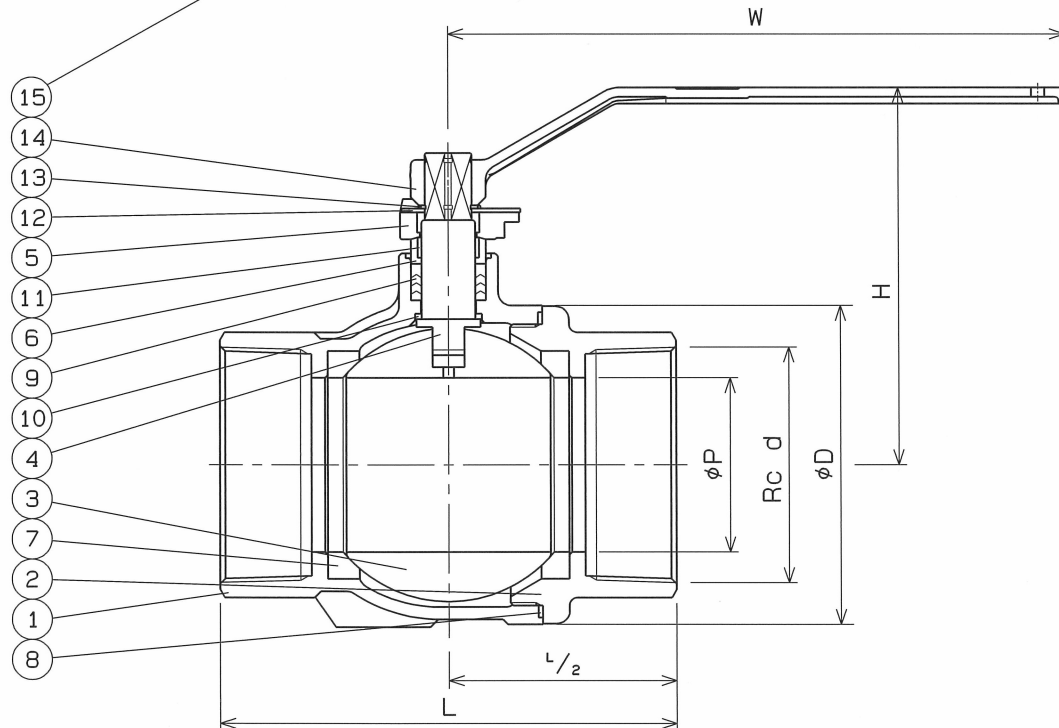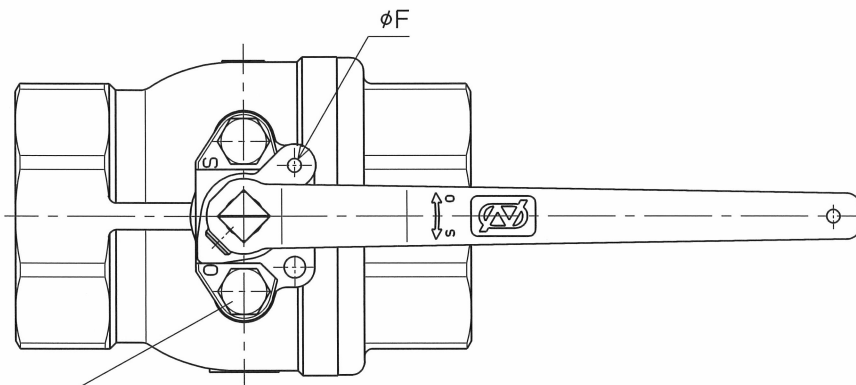

SPEC.		TEST PRESS.	
FLUID		SHELL	HYDRO 2.1 MPa
PRESS.	MPa	SEAT	AIR 0.6 MPa
TEMP.	℃	AIR	MPa

PIPE THREADS CONFORM WITH "JIS B 0203"

15	GLAND BOLT	2	SUS 304	
14	HANDLE	1	SCS 13	
13	STOP RING	1	SUS 304	
12	STOPPER	1	SUS 304	
11	STEM BEARING	1	P.T.F.E.	GLASS FILLED
10	THRUST BEARING	1	P.T.F.E.	GLASS FILLED
9	GLAND PACKING	1 set	P.T.F.E.	
8	GASKET PACKING	1	P.T.F.E.	
7	BALL SEAT	2	P.T.F.E.	
6	GLAND SLEEVE	1	SUS 316	
5	GLAND	1	SCS 13	
4	STEM	1	SUS 304	
3	BALL DISC	1	SCS 13A	
2	BODY CAP	1	SCS 13A	
1	BODY	1	SCS 13A	

No.	NAME OF PARTS	Q.TY	MATERIALS	REMARKS
NAME 400 W.O.G. SCREWED ENDS BALL VALVES REDUCED BORE				
TYPE	N-610	SIZE	2 1/2, 3 B	
DWG.No.	BAMS-0915 ◇	APPROVED BY	H. Ogura	
DATE	APR. 12. 2007	CHECKED BY	H. Ogura	
SCALE	:	DESIGNED BY	R. Matsuki	
THIRD ANGLE PROJECTION METHOD		DRAWN BY		

O. N. INDUSTRIES LTD.