




◇ Z960-0957 10' 9M

SIZE	d	L	D	T	BOLT HOLE			H	W	A	F	Q. TY
					C	n	h					
20	20	150	100	14	75	4	15	109	150	58	4.3	
25	25	165	125	14	90	4	19	112	150	58	4.3	
40	40	250	140	16	105	4	19	130	230	82	5.1	

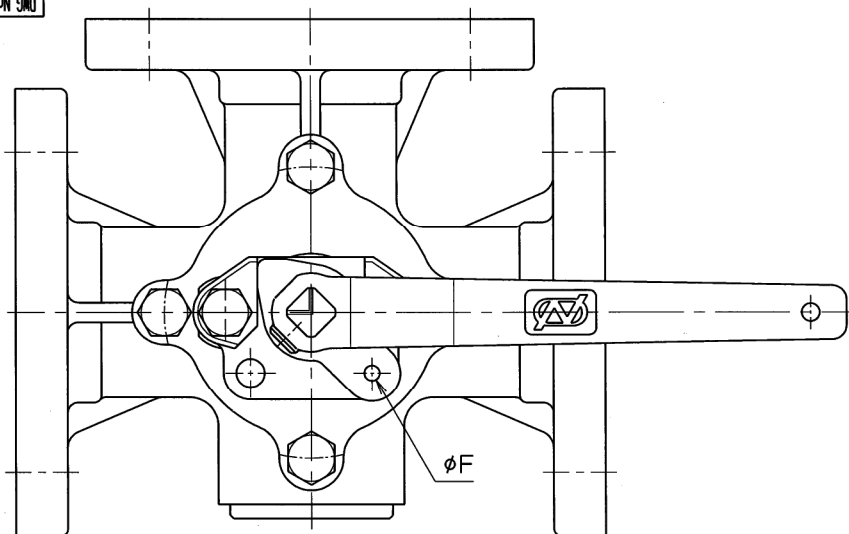

LEFT TURN: B-C



RIGHT TURN: A-B



SPEC.		TEST PRESS.	
FLUID		SHELL	HYDRO 2.1 MPa
PRESS.	MPa	SEAT	AIR 0.6 MPa
TEMP.	℃	AIR	MPa

END FLANGED: JIS B 2220


20	GLAND BOLT	2	SUS 304	
19	COVER BOLT	4	SUS 304	
18	HANDLE	1	SCS 13	
17	STOP RING	1	SUS 304	
16	STOPPER	1	SUS 304	
15	BEARING	1	P.T.F.E.	#SUS 316
14	BEARING	1	P.T.F.E.	#SUS 316
13	"O" RING	3	FKM	
12	GASKET PACKING	1	P.T.F.E.	
11	COVER PACKING	1	P.T.F.E.	
10	GLAND PACKING	1 set	P.T.F.E.	
9	BALL SEAT	4	P.T.F.E.	
8	GLAND SLEEVE	1	SUS 316	
7	GLAND	1	SCS 13	
6	SEAT HOLDER (C)	1	SUS 304	
5	SEAT HOLDER (B)	3	SUS 304	
4	SEAT HOLDER (A)	3	SUS 304	
3	BALL DISC	1	SCS 13A	
2	BODY COVER	1	SCS 13A	
1	BODY	1	SCS 13A	


No.	NAME OF PARTS	Q. TY	MATERIALS	REMARKS
NAME JIS 10K FLANGED ENDS 4-SEATS THREE WAY BALL VALVES L-PORT				
TYPE	N-737L	SIZE	20 ~ 40 A	
DMG.No.	BATS-0957 ◇	APPROVED BY	H. Ogawa	
DATE	APR. 20, 2007	CHECKED BY	H. Ogawa	
SCALE		DESIGNED BY	M. Yamashita	
THIRD ANGLE PROJECTION METHOD		DRAWN BY	T. Okamoto	

O. N. INDUSTRIES LTD.

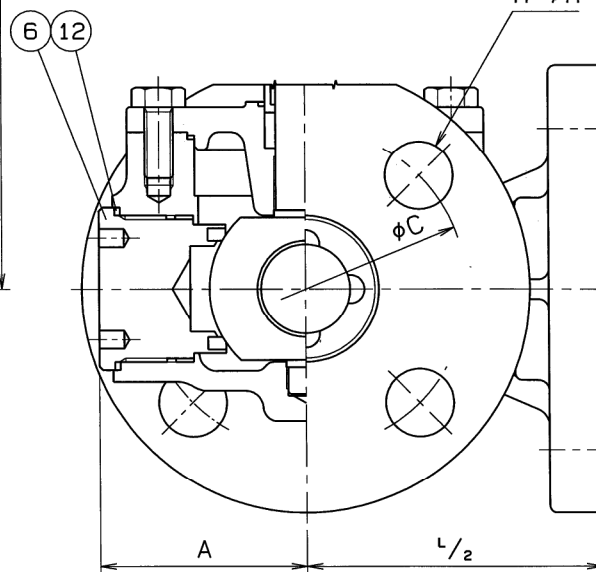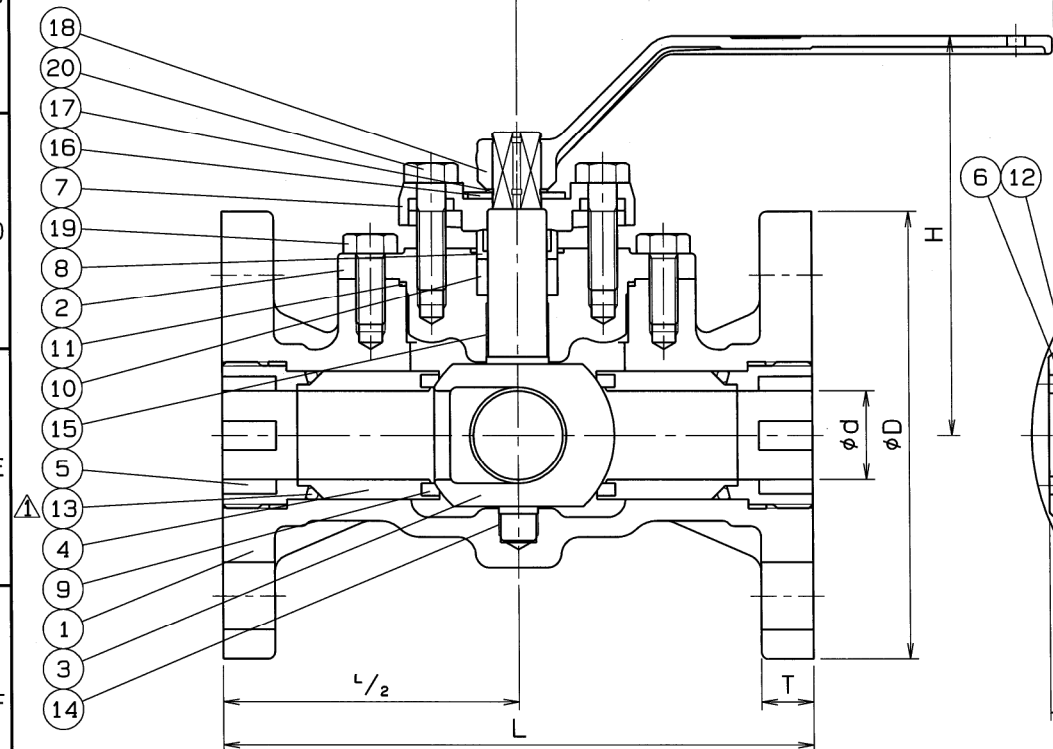


△		
△		
△	材質名の修正 (VITON→FKM)	2024. 9. 18.

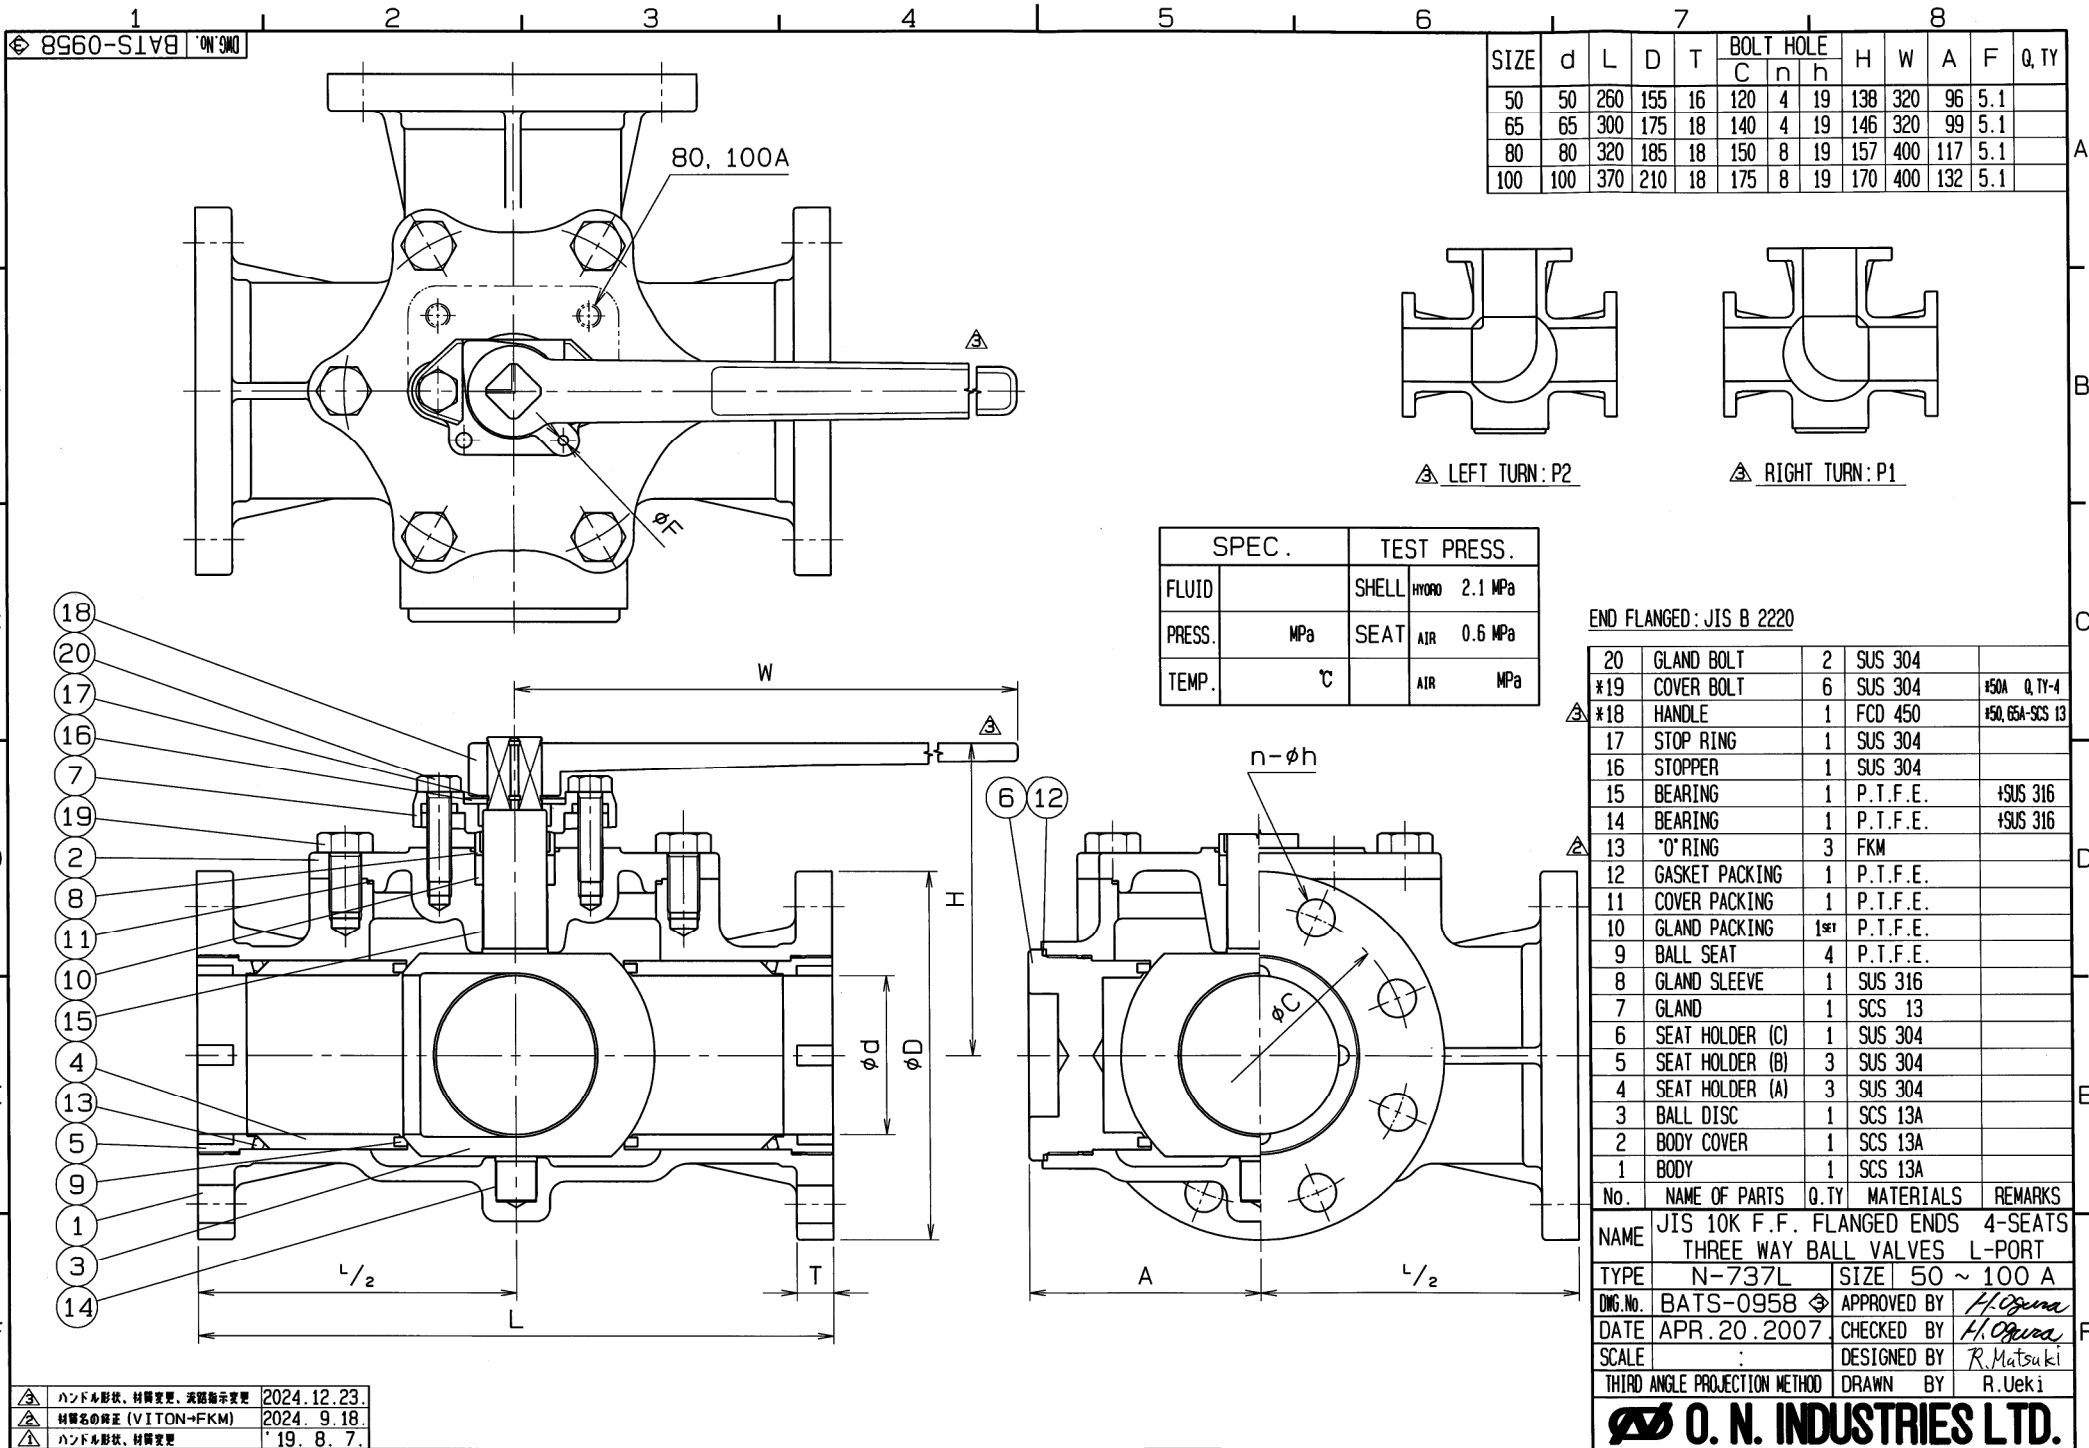

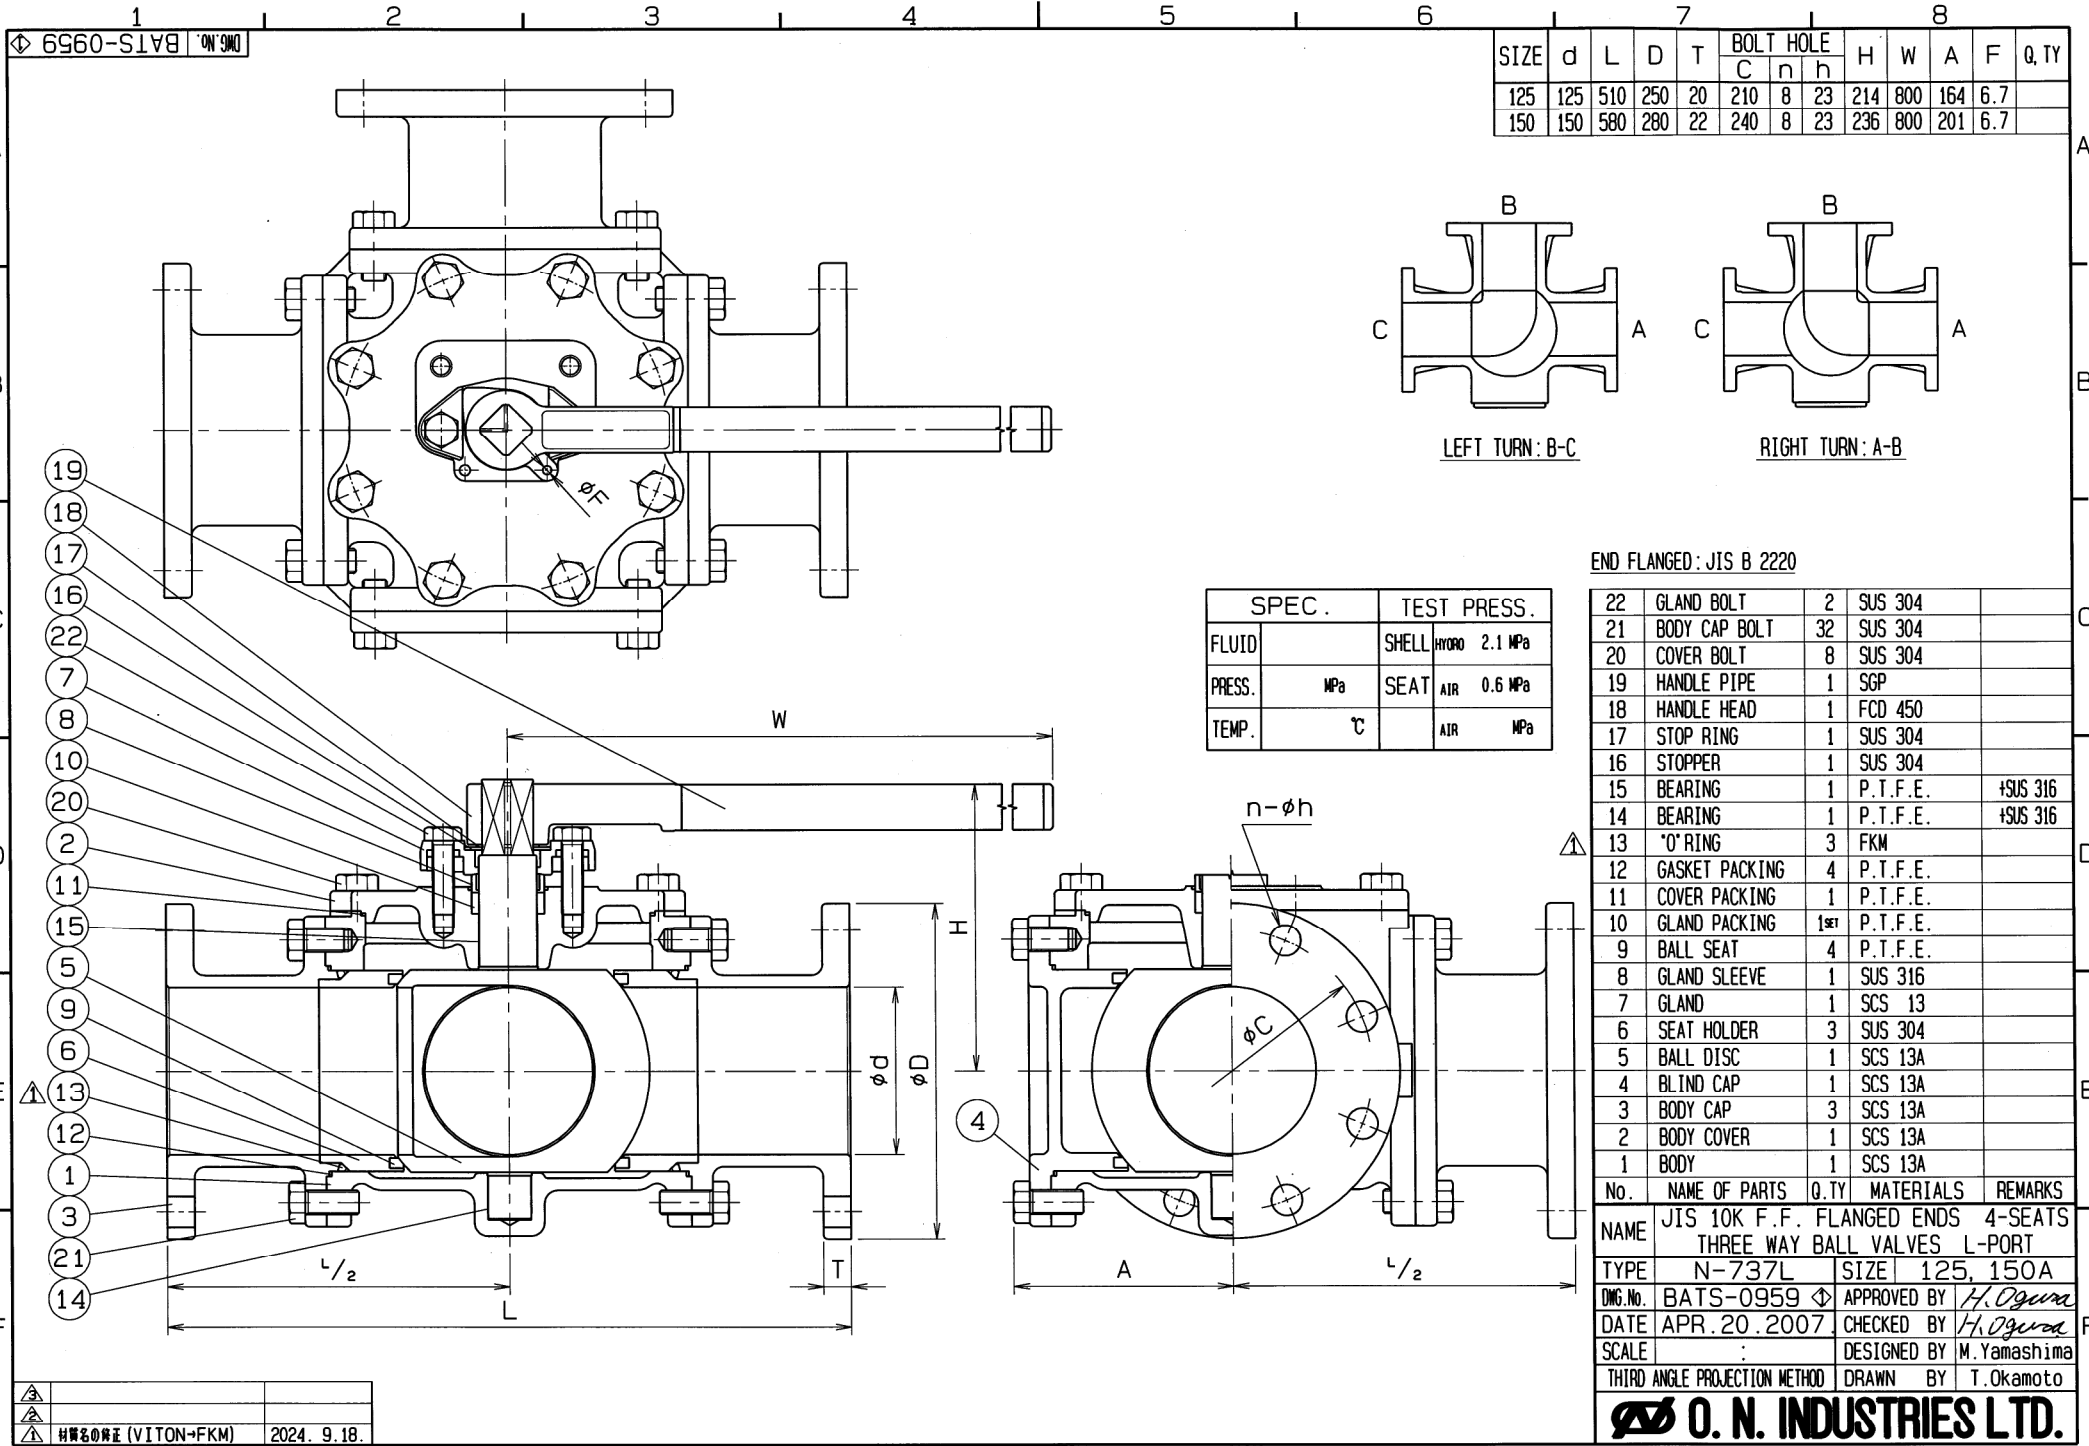


◇ 6960-S1A9 'ON' GMD

SIZE	d	L	D	T	BOLT HOLE			H	W	A	F	Q, TY
					C	n	h					
125	125	510	250	20	210	8	23	214	800	164	6.7	
150	150	580	280	22	240	8	23	236	800	201	6.7	



LEFT TURN: B-C



RIGHT TURN: A-B

SPEC.		TEST PRESS.	
FLUID		SHELL	HYDRO 2.1 MPa
PRESS.	MPa	SEAT	AIR 0.6 MPa
TEMP.	℃	AIR	MPa

END FLANGED: JIS B 2220

22	GLAND BOLT	2	SUS 304	
21	BODY CAP BOLT	32	SUS 304	
20	COVER BOLT	8	SUS 304	
19	HANDLE PIPE	1	SGP	
18	HANDLE HEAD	1	FCD 450	
17	STOP RING	1	SUS 304	
16	STOPPER	1	SUS 304	
15	BEARING	1	P.T.F.E.	+SUS 316
14	BEARING	1	P.T.F.E.	+SUS 316
13	O'RING	3	FKM	
12	GASKET PACKING	4	P.T.F.E.	
11	COVER PACKING	1	P.T.F.E.	
10	GLAND PACKING	1SET	P.T.F.E.	
9	BALL SEAT	4	P.T.F.E.	
8	GLAND SLEEVE	1	SUS 316	
7	GLAND	1	SCS 13	
6	SEAT HOLDER	3	SUS 304	
5	BALL DISC	1	SCS 13A	
4	BLIND CAP	1	SCS 13A	
3	BODY CAP	3	SCS 13A	
2	BODY COVER	1	SCS 13A	
1	BODY	1	SCS 13A	

No.	NAME OF PARTS	Q.TY	MATERIALS	REMARKS
NAME JIS 10K F.F. FLANGED ENDS 4-SEATS THREE WAY BALL VALVES L-PORT				
TYPE N-737L		SIZE 125, 150A		
DMG.No.	BATS-0959 ◇	APPROVED BY	H. Ogura	
DATE	APR. 20. 2007	CHECKED BY	H. Ogura	
SCALE		DESIGNED BY	M. Yamashima	
THIRD ANGLE PROJECTION METHOD		DRAWN BY	T. Okamoto	

O. N. INDUSTRIES LTD.

材料名の保証 (VITON→FKM) 2024. 9. 18.