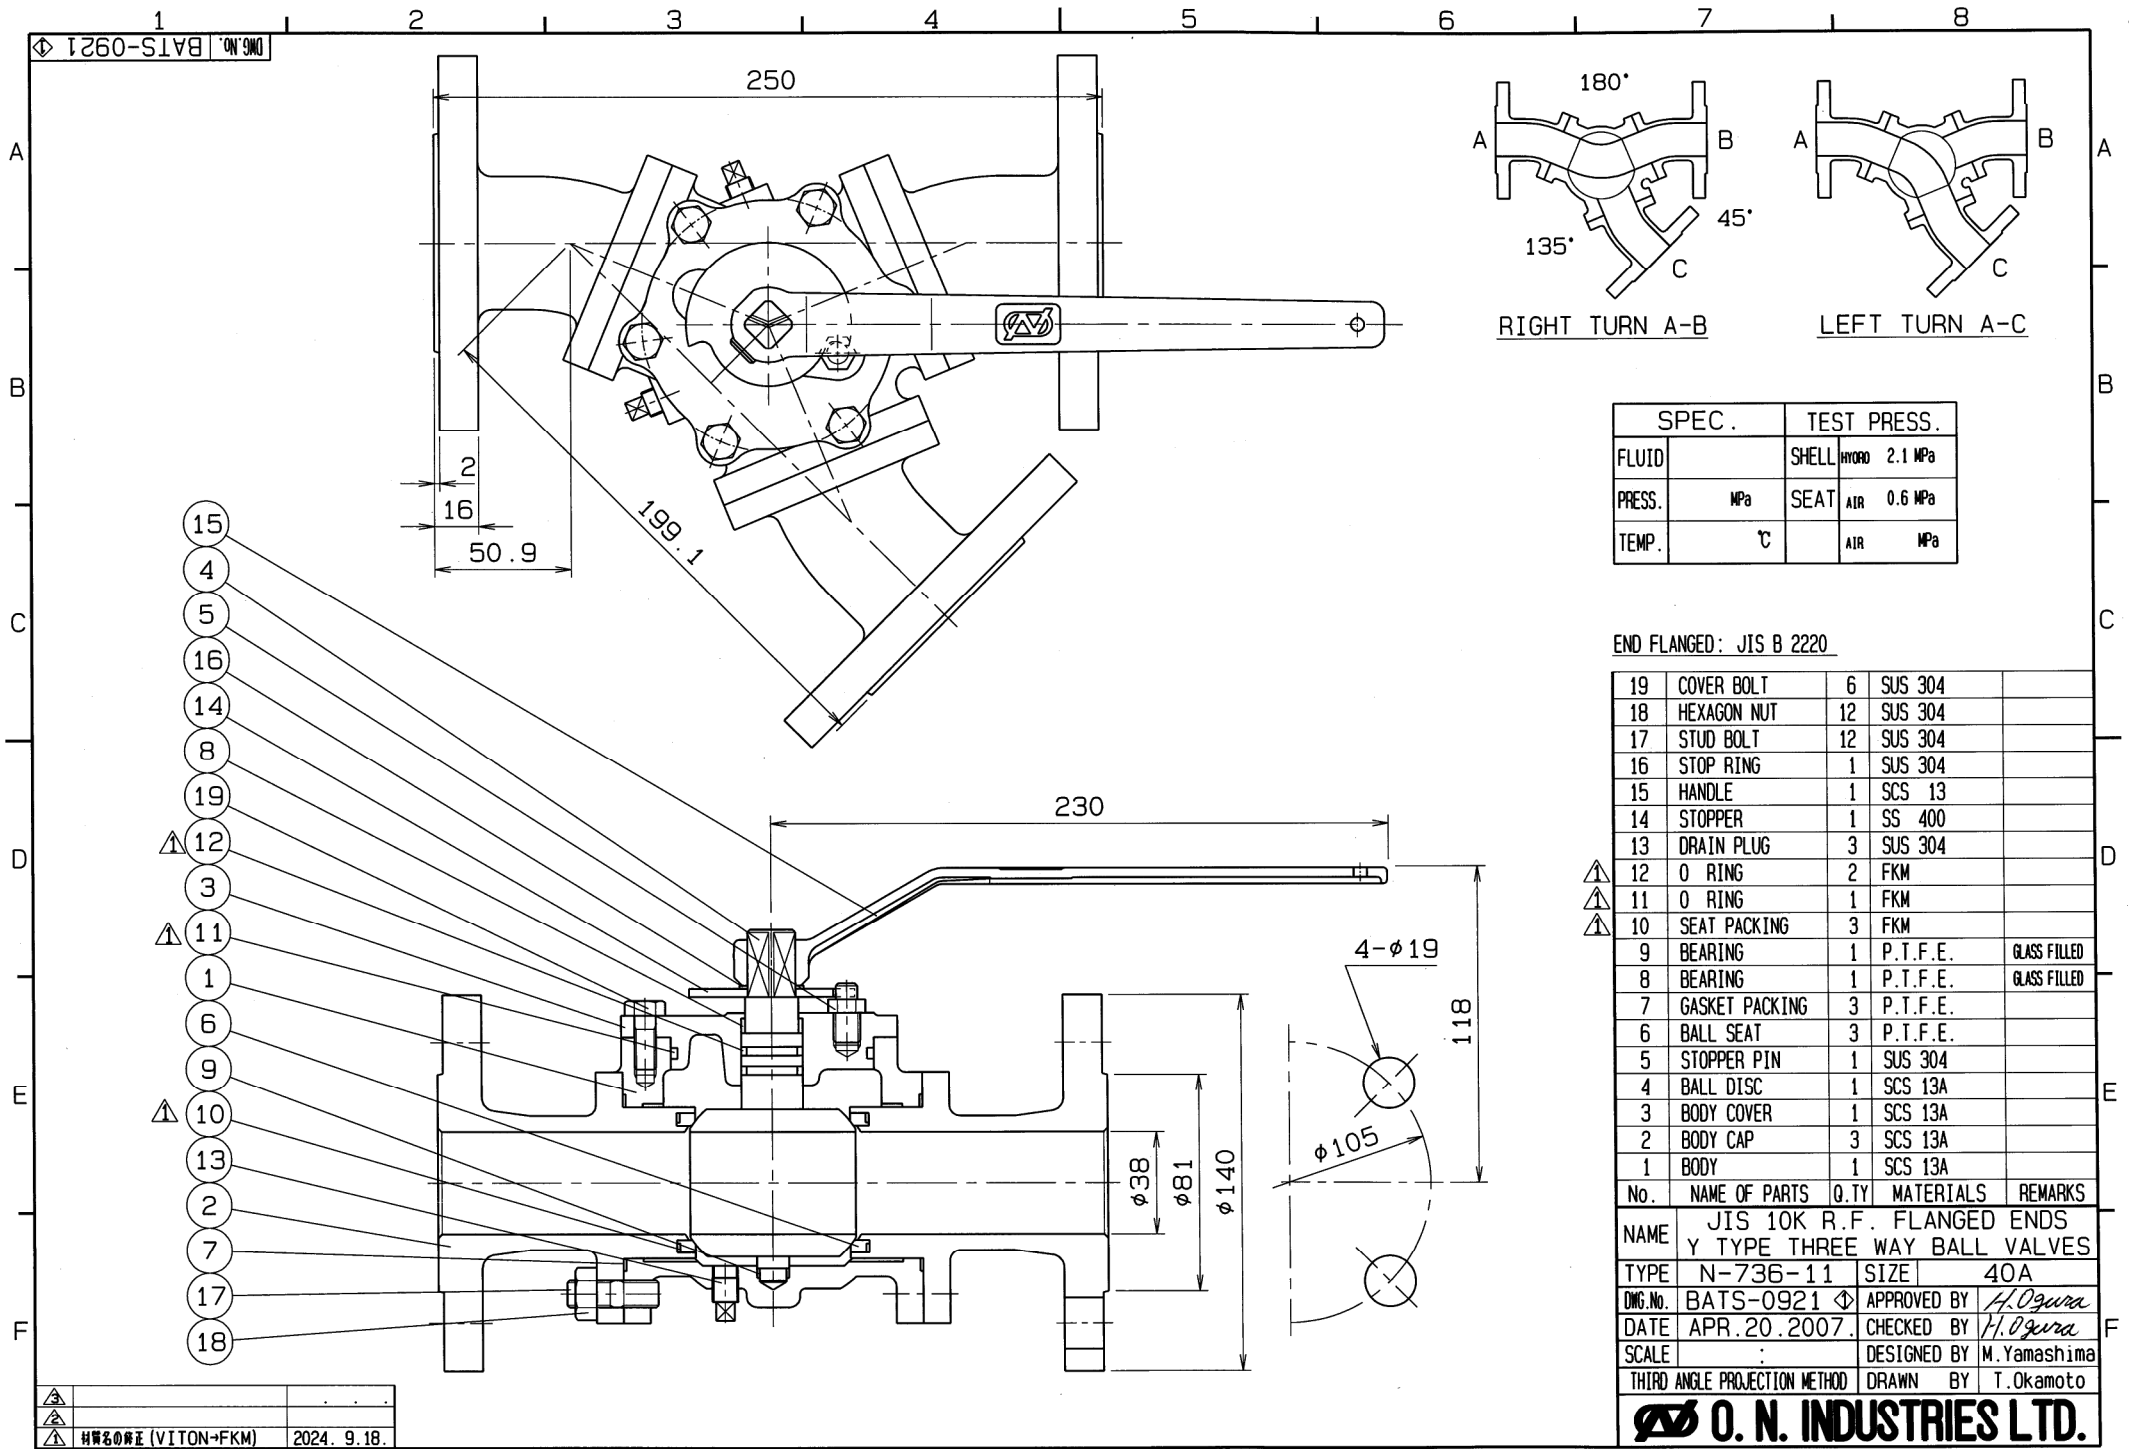


SPEC.		TEST PRESS.	
FLUID		SHELL	HYDRO 2.1 MPa
PRESS.	MPa	SEAT	AIR 0.6 MPa
TEMP.	℃	AIR	MPa

END FLANGED: JIS B 2220



19	COVER BOLT	6	SUS 304	
18	HEXAGON NUT	12	SUS 304	
17	STUD BOLT	12	SUS 304	
16	STOP RING	1	SUS 304	
15	HANDLE	1	SCS 13	
14	STOPPER	1	SS 400	
13	DRAIN PLUG	3	SUS 304	
12	O RING	2	FKM	
11	O RING	1	FKM	
10	SEAT PACKING	3	FKM	
9	BEARING	1	P.T.F.E.	GLASS FILLED
8	BEARING	1	P.T.F.E.	GLASS FILLED
7	GASKET PACKING	3	P.T.F.E.	
6	BALL SEAT	3	P.T.F.E.	
5	STOPPER PIN	1	SUS 304	
4	BALL DISC	1	SCS 13A	
3	BODY COVER	1	SCS 13A	
2	BODY CAP	3	SCS 13A	
1	BODY	1	SCS 13A	

No.	NAME OF PARTS	Q.TY	MATERIALS	REMARKS
NAME JIS 10K R.F. FLANGED ENDS Y TYPE THREE WAY BALL VALVES				
TYPE N-736-11		SIZE 40A		
DWG.No.	BATS-0921	APPROVED BY	H.Ogura	
DATE	APR.20.2007.	CHECKED BY	H.Ogura	
SCALE		DESIGNED BY	M.Yamashima	
THIRD ANGLE PROJECTION METHOD		DRAWN BY	T.Okamoto	


O. N. INDUSTRIES LTD.

2260-S1VB 'ON' 9MO

SIZE	d	L	A	B	H	W	FLANGED DIMENSION								Q.TY
							D	G	T	f	C	n	h		
50	51	280	56	224	120	320	155	96	16	2	120	4	19		
65	64	320	56.2	263.8	128	320	175	116	18	2	140	4	19		
80	76	360	68.9	291.1	132	400	185	126	18	2	150	8	19		
100	102	460	76	384	157	400	210	151	18	2	175	8	19		

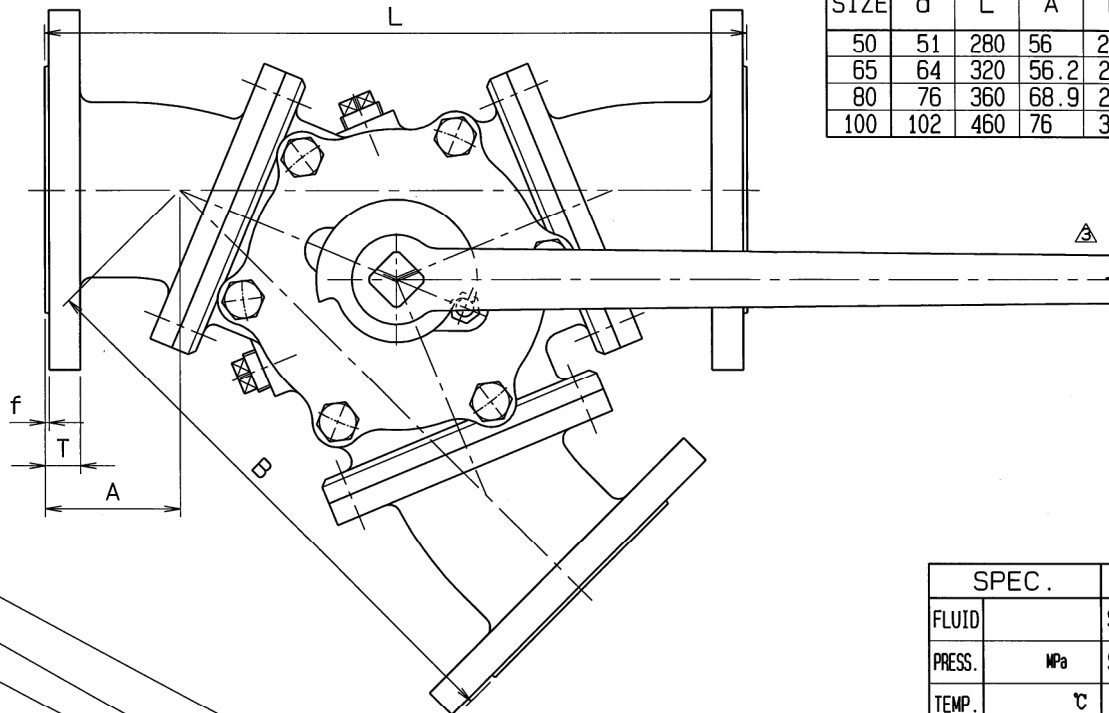

RIGHT TURN A-B



LEFT TURN A-C

SPEC.		TEST PRESS.	
FLUID		SHELL	HYDRO 2.1 MPa
PRESS.	MPa	SEAT	AIR 0.6 MPa
TEMP.	℃	AIR	MPa

END FLANGED: JIS B 2220

19	COVER BOLT	6	SUS 304	
*18	HEXAGON NUT	18	SUS 304	#50, 65A-12
*17	STUD BOLT	18	SUS 304	#50, 65A-12
16	STOP RING	1	SUS 304	
*15	HANDLE	1	FCD 450	#50, 65A-SCS 13
14	STOPPER	1	SS 400	
13	DRAIN PLUG	3	SUS 304	
*12	O RING	2	FKM	
*11	O RING	1	FKM	
*10	SEAT PACKING	3	FKM	
9	BEARING	1	P.T.F.E.	GLASS FILLED
8	BEARING	1	P.T.F.E.	GLASS FILLED
7	GASKET PACKING	3	P.T.F.E.	
6	BALL SEAT	3	P.T.F.E.	
5	STOPPER PIN	1	SUS 304	
4	BALL DISC	1	SCS 13A	
3	BODY COVER	1	SCS 13A	
2	BODY CAP	3	SCS 13A	
1	BODY	1	SCS 13A	


No.	NAME OF PARTS	Q.TY	MATERIALS	REMARKS
NAME JIS 10K R.F. FLANGED ENDS Y TYPE THREE WAY BALL VALVES				
TYPE	N-736-11	SIZE	50-100A	
DMG.No.	BATS-0922	APPROVED BY	H.Ogura	
DATE	APR.20.2007.	CHECKED BY	H.Ogura	
SCALE		DESIGNED BY	R.Matsuki	
THIRD ANGLE PROJECTION METHOD		DRAWN BY	R.Ueki	

O. N. INDUSTRIES LTD.

△	ハンドルの形状、材質変更	2024.12.23.
△	材質名の修正 (VITON→FKM)	2024. 9. 18.
△	ハンドルの形状、材質変更	'19. 8. 7.

◇ E260-S1VB ON 9MO

SIZE	d	L	A	B	H	W	FLANGED DIMENSION							Q.TY
							D	G	T	f	C	n	h	
125	127	550	93	457	200	800	250	182	20	2	210	8	23	
150	152	600	87.5	512.5	221	800	280	212	22	2	240	8	23	

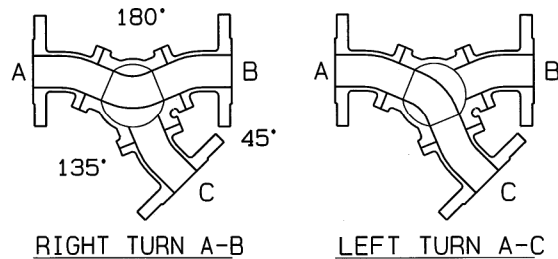

SPEC.		TEST PRESS.	
FLUID		SHELL	HYDRO 2.1 MPa
PRESS.	MPa	SEAT	AIR 0.6 MPa
TEMP.	℃	AIR	MPa

END FLANGED: JIS B 2220

20	HANDLE PIPE	1	SGP 1B	
19	COVER BOLT	8	SUS 304	
18	HEXAGON NUT	24	SUS 304	
17	STUD BOLT	24	SUS 304	
16	STOP RING	1	SUS 304	
15	HANDLE HEAD	1	FCD 450	
14	STOPPER	1	SS 400	
13	DRAIN PLUG	3	SUS 304	
12	O RING	2	FKM	
11	SEAT PACKING	3	FKM	
10	BEARING	1	P.T.F.E.	SUS316 FILLED
9	BEARING	1	P.T.F.E.	SUS316 FILLED
8	COVER PACKING	1	P.T.F.E.	
7	GASKET PACKING	3	P.T.F.E.	
6	BALL SEAT	3	P.T.F.E.	
5	STOPPER PIN	1	SUS 304	
4	BALL DISC	1	SCS 13A	
3	BODY COVER	1	SCS 13A	
2	BODY CAP	3	SCS 13A	
1	BODY	1	SCS 13A	

No.	NAME OF PARTS	Q.TY	MATERIALS	REMARKS
NAME	JIS 10K R.F. FLANGED ENDS Y TYPE THREE WAY BALL VALVES			
TYPE	N-736-11	SIZE	125, 150A	
DMG.No.	BATS-0923 ◇	APPROVED BY	H. Ogura	
DATE	APR.20.2007.	CHECKED BY	H. Ogura	
SCALE		DESIGNED BY	M. Yamashita	
THIRD ANGLE PROJECTION METHOD		DRAWN BY	T. Okamoto	

O. N. INDUSTRIES LTD.

材質名の修正 (VITON→FKM) 2024. 9. 18.