


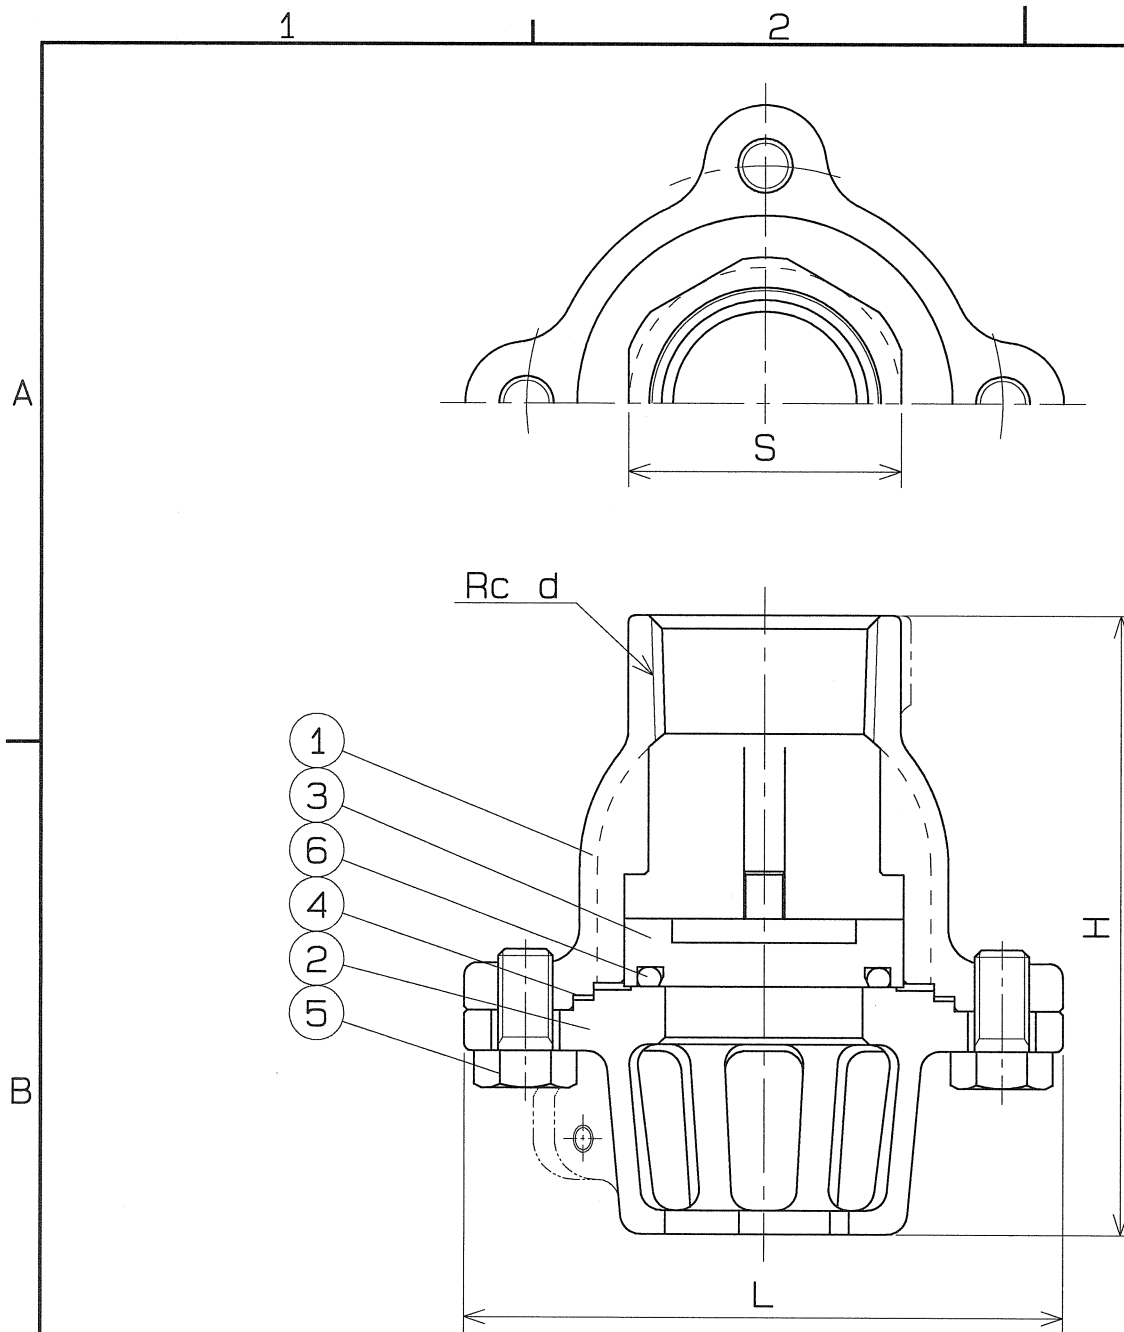

SIZE	PIPE THREAD	H	L	S	Q.TY
	d				
$\frac{3}{4}$ B	Rc $\frac{3}{4}$	80	72	33	
1B	Rc 1	91	88	40	
$1\frac{1}{4}$ B	Rc $1\frac{1}{4}$	106	102	50	
$1\frac{1}{2}$ B	Rc $1\frac{1}{2}$	122	124	57	
2B	Rc 2	145	142	70	

SPEC.		TEST PRESS.	
FLUID		SHELL	HYDRO 2.1 MPa (21.4 kgf/cm ²)
PRESS.	MPa (kgf/cm ²)	SEAT	0.6 MPa (6.1 kgf/cm ²)
TEMP.	℃	AIR	MPa (kgf/cm ²)

PIPE THREADS: JIS B 0203

No. 5 2B Q.TY: 6

6	O RING	1	NBR	
5	HEXAGON BOLT	4	SUS 304	
4	GASKET PACKING	1	P.T.F.E	
3	DISC	1	SUS 304	
2	STRAINER	1	SCS 13	
1	BODY	1	SCS 13	

No.	NAME OF PARTS	Q.TY	MATERIALS	REMARKS
-----	---------------	------	-----------	---------

NAME JIS 10K SCREWED END
FOOT VALVES

TYPE N-210 SIZE $\frac{3}{4}$ B-2B

ENG.No. FASS-0051 ◇ APPROVED BY *H. Tsuneto*



DATE NOV. 24. 2004 CHECKED BY *K. Ashida*

SCALE : DESIGNED BY *R. Matsuda*

THIRD ANGLE PROJECTION METHOD DRAWN BY

O. N. INDUSTRIES LTD.

△		
△		
△		

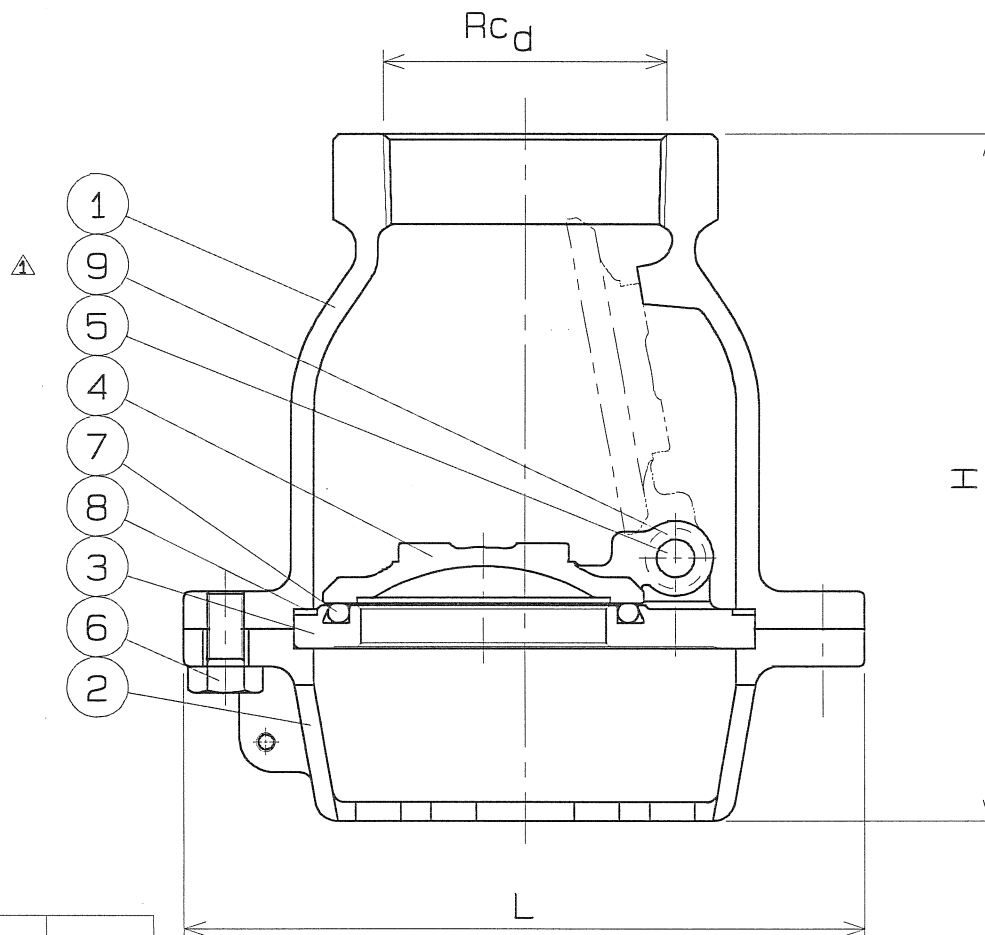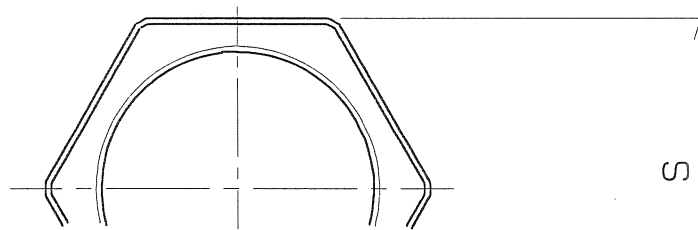

SIZE	PIPE THREAD	H	L	S	Q.TY
	d				
2 ¹ / ₂ B	Rc 2 ¹ / ₂	182	180	90	
3B	Rc 3	208	217	105	

SPEC.		TEST PRESS.	
FLUID		SHELL	HYORO 2.1 MPa (21.4 kgf/cm ²)
PRESS.	MPa (kgf/cm ²)	SEAT	AIR 0.6 MPa (6.1 kgf/cm ²)
TEMP.	°C	AIR	(MPa kgf/cm ²)

PIPE THREADS: JIS B 0203
No.6 3B Q.TY: 8

9	BEARING	2	P.T.F.E	+SUS316
8	GASKET PACKING	1	P.T.F.E	
7	O RING	1	NBR	
6	HEXAGON BOLT	6	SUS 304	
5	PIN	1	SUS 304	
4	DISC	1	SCS 13	
3	SEAT	1	SCS 13	
2	STRAINER	1	SCS 13	
1	BODY	1	SCS 13	

No.	NAME OF PARTS	Q.TY	MATERIALS	REMARKS
JIS 10K SCREWED END FOOT VALVES				
NAME				
TYPE	N-210	SIZE	2 ¹ / ₂ B, 3B	
ENG.No.	FASS-0041	APPROVED BY	Y.SATO	
DATE	JUN. 12, 1993	CHECKED BY	K.TSUNETO	
SCALE	:	DESIGNED BY	K.TSUNETO	
THIRD ANGLE PROJECTION METHOD		DRAWN BY		

△	SI単位に変更	'99. 9. 16.
△	BEARING	'94. 4. 18.

O. N. INDUSTRIES LTD.